

# MIC20XX

# Fixed and Adjustable Current Limiting Power Distribution Switches

#### Features

#### MIC20X3 - MIC20X9

- 70 mΩ Typical On-Resistance @ 5V

#### MIC2005A/20X9A

- 170 mΩ Typical On-Resistance @ 5V
- · Enable Active-High or Active-Low
- 2.5V 5.5V Operating Range
- Pre-Set Current Limit Values of 0.5A, 0.8A, and 1.2A\*
- Adjustable Current Limit 0.2A to 2.0A\* (MIC20X7-MIC20X9)
- Adjustable Current Limit 0.1A to 0.9A\* (MIC20X9A)
- Undervoltage Lockout (UVLO)
- Variable UVLO Allows Adjustable UVLO Thresholds\*
- · Automatic Load Discharge for Capacitive Loads\*
- · Soft-Start Prevents Large Current Inrush
- · Adjustable Slew Rate Allows Custom Slew Rates\*
- Automatic-On Output After Fault
- Thermal Protection
- \* Available on some family members

#### Applications

- Digital Televisions (DTV)
- Set Top Boxes
- PDAs
- Printers
- USB / IEEE 1394 Power Distribution
- Desktop and Laptop PCs
- Game Consoles
- Docking Stations

#### **General Description**

MIC20XX family of switches are current limiting, high-side power switches, designed for general purpose power distribution and control in digital televisions (DTV), printers, set top boxes (STB), PCs, PDAs, and other peripheral devices (see MIC20XX Family Package Types and Table 0-1).

MIC20XX family's primary functions are current limiting and power switching. They are thermally protected and will shutdown should their internal temperature reach unsafe levels, protecting both the device and the load, under high-current or fault conditions.

Features include fault reporting, fault blanking to eliminate noise-induced false alarms, output slew rate limiting, under voltage detection, automatic-on output, and enable pin with choice of either active low or active high enable. The FET is self-contained, with a fixed- or user-adjustable current limit. The MIC20XX family is ideal for any system where current limiting and power control are desired.

The MIC201X ( $3 \le X \le 9$ ) and MIC2019A switches offer a unique new patented feature: Kickstart which allows momentary high-current surges up to the secondary current limit ( $I_{LIMIT}_2nd$ ) without sacrificing overall system safety.

The MIC20XX family is offered, depending on the desired features, in a space-saving 5-pin SOT-23, 6-pin SOT-23, and 2 mm x 2 mm DFN packages.

## **MIC20XX Family Package Types**


Fixed Current Limit (MIC20X3)




Fixed Current Limit (MIC20X4)



Fixed Current Limit (MIC20X5)

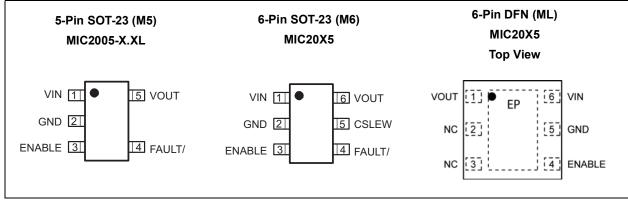


Fixed Current Limit (MIC20X6)

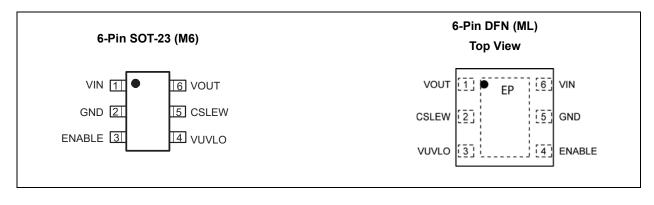


#### MIC20XX Family Package Types (Continued)


Adjustable Current Limit (MIC20X7/MIC20X8)

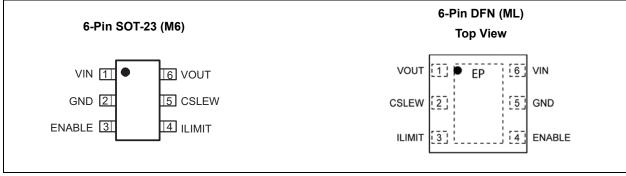


#### Adjustable Current Limit (MIC20X9)

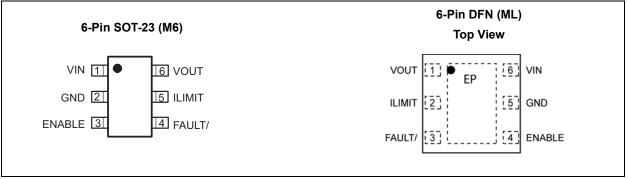


#### Adjustable Current Limit (MIC2005A)

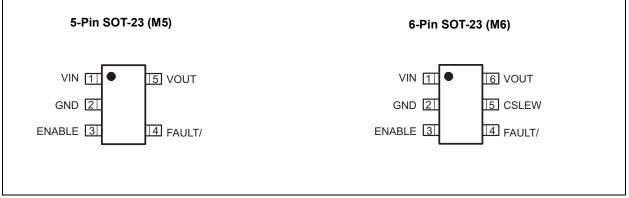


#### Adjustable Current Limit (MIC2009A)

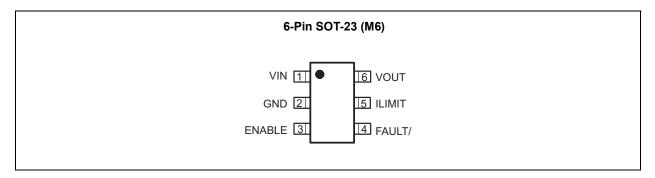

# **Typical Application Circuit**

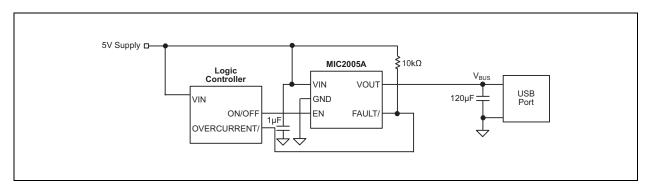

# Functional Block Diagram

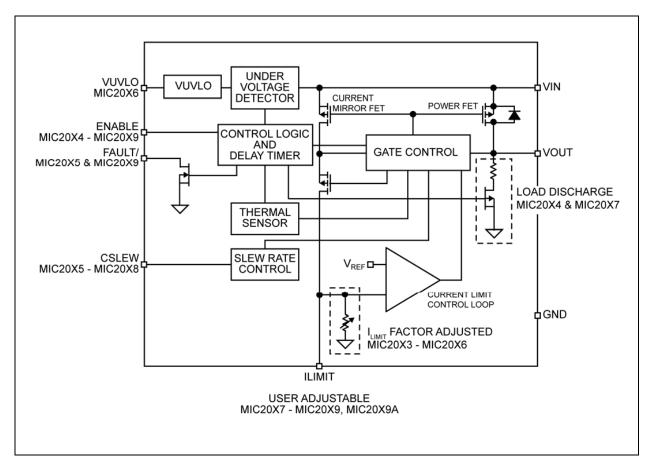

# 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings †

V <sub>IN</sub> , V <sub>OUT</sub>	
All Other Pins	–0.3 to +5.5V
Power Dissipation (P <sub>D</sub> )	Internally Limited
Continuous Output Current	-
All except MIC2005A / MIC20X9A	2.25A
MIC2005A / 20X9A	1.0A
ESD (HBM) Note 1	
V <sub>OUT</sub> and GND	±4 kV
All Other Pins	±2 kV
ESD (MM) Note 1	
All Pins	±200V

# **Operating Ratings ††**

Supply Voltage	+2.5V to +5.5V
Continuous Output Current	
All except MIC2005A / MIC20X9A	0A to 2.1A
MIC2005A / 20X9A	0A to 0.9A

**† Notice:** Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

**†† Notice:** The device is not guaranteed to function outside its operating ratings.

**Note 1:** Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.

# **ELECTRICAL CHARACTERISTICS**

**Electrical Characteristics:**  $V_{IN} = 5V$ ;  $C_{IN} = 1 \ \mu$ F;  $T_A = +25^{\circ}$ C, unless otherwise noted. **Bold** indicates specifications over the full operating temperature range of  $-40^{\circ}$ C to  $+85^{\circ}$ C. (Note 1)

Parameter	Symbol	Min.	Тур.	Max.	Units	Conditions
Switch Input Voltage	V <sub>IN</sub>	2.5		5.5	V	—
Output Leakage Current (Note 2)	I <sub>LEAK</sub>	_	12	100	μA	Switch = OFF, V <sub>OUT</sub> = 0V Active-Low Enable, V <sub>EN</sub> = 1.5V Active-High Enable, V <sub>EN</sub> = 0V
MIC2005A, MIC2009A, MIC20	)19A					
		_	80	300		Switch = ON Active-Low Enable, V <sub>EN</sub> = 0V Active-High Enable, V <sub>EN</sub> = 1.5V
Supply Current (Note 2)	I <sub>IN</sub>	_	8	15	μA	Switch = OFF Active-Low Enable, V <sub>EN</sub> = 1.5V
		_	1	5		Switch = OFF Active-High Enable, V <sub>EN</sub> = 0V
	_	_	170	220	mΩ	
Power Switch Resistance	R <sub>DS(ON)</sub>	_	_	275		V <sub>IN</sub> = 5V, I <sub>OUT</sub> = 100 mA
MIC2005A						
Fixed Current Limit	I <sub>LIMIT</sub>	0.5	0.7	0.9	Α	$V_{OUT} = 0.8 \times V_{IN}$

# **ELECTRICAL CHARACTERISTICS (CONTINUED)**

**Electrical Characteristics:**  $V_{IN} = 5V$ ;  $C_{IN} = 1 \ \mu\text{F}$ ;  $T_A = +25^{\circ}\text{C}$ , unless otherwise noted. **Bold** indicates specifications over the full operating temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . (Note 1)

Parameter	Symbol	Min.	Тур.	Max.	Units	Conditions
MIC2009A, MIC2019A			1			
		172	211	263		I <sub>OUT</sub> = 0.9A, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub>
	0	152	206	263		I <sub>OUT</sub> = 0.5A, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub>
Variable Current Limit Factors	$C_{LF}$	138	200	263	V	I <sub>OUT</sub> = 0.2A, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub>
		121	192	263		I <sub>OUT</sub> = 0.1A, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub>
MIC2019A		•		•	•	·
Secondary Current Limit	I <sub>LIMIT 2nd</sub>	1	2	3	А	V <sub>IN</sub> = 2.5V, V <sub>OUT</sub> = 0V
MIC2003-MIC2009, MIC2013-	MIC2019, MIC	2005-X.	XL			·
		_	80	330		Switch = ON Active-Low Enable, V <sub>EN</sub> = 0V Active-High Enable, V <sub>EN</sub> = 1.5V
Supply Current (Note 2)	I <sub>IN</sub>		8	15	μA	Switch = OFF Active-Low Enable, V <sub>EN</sub> = 1.5V
		_	1	5		Switch = OFF Active-High Enable, V <sub>EN</sub> = 0V
Power Switch Resistance	D	_	70	100	- m0	V <sub>IN</sub> = 5V, I <sub>OUT</sub> = 100 mA
Fower Switch Resistance	R <sub>DS(ON)</sub>	—		125	mΩ	VIN - 3V, 100T - 100 IIIA
MIC2003-X.X, MIC2004-X.X, MIC2015-X.X MIC2015-X.X	/IC2005-X.X,	MIC200	5-X.XL, M	IC2006-)	K.X, MIC2	2013-X.X, MIC2014-X.X,
		0.5	0.7	0.9		–0.5, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub>
Fixed Current Limit	I <sub>LIMIT</sub>	0.8	1.1	1.5	А	–0.8, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub>
		1.2	1.6	2.1		–1.2, V <sub>OUT</sub> = 0.8 × V <sub>IN</sub>
MIC2005-0.5		r	1	r	1	
Fixed Current Limit	I <sub>LIMIT</sub>	0.5	0.7	0.9	Α	$V_{OUT} = 0.8 \times V_{IN}$
MIC2007, MIC2008, MIC2009,	MIC2017, MI	C2018, N	/IC2019	1	1	1
		210	250	286		$I_{OUT}$ = 2.0A, $V_{OUT}$ = 0.8 × $V_{IN}$
Variable Current Limit Factors	C	190	243	293	v	$I_{OUT}$ = 1.0A, $V_{OUT}$ = 0.8 × $V_{IN}$
	$C_{LF}$	168	235	298	v	$I_{OUT}$ = 0.5A, $V_{OUT}$ = 0.8 × $V_{IN}$
		144	225	299		$I_{OUT}$ = 0.2A, $V_{OUT}$ = 0.8 × $V_{IN}$
MIC2013, MIC2014, MIC2015,	MIC2016, MI	C2017, N	/IC2018,	MIC2019	)	
Secondary Current Limit	I <sub>LIMIT_2nd</sub>	2.2	4	6	А	V <sub>IN</sub> = 2.5V, V <sub>OUT</sub> = 0V
MIC2006, MIC2016						
Variable UVLO Threshold	V <sub>UVLO_TH</sub>	225	250	275	mV	-
MIC20x4, MIC20x7						
Load Discharge Resistance	R <sub>DSCHG</sub>	70	126	200	Ω	V <sub>IN</sub> = 5V, I <sub>SINK</sub> = 5 mA
MIC20X5, MIC20X6, MIC20X7	, MIC20X8					
C <sub>SLEW</sub> Input Current	I <sub>CSLEW</sub>	_	0.175		μA	$0V \le V_{OUT} \le 0.8 V_{IN}$

# **ELECTRICAL CHARACTERISTICS (CONTINUED)**

**Electrical Characteristics:**  $V_{IN} = 5V$ ;  $C_{IN} = 1 \ \mu\text{F}$ ;  $T_A = +25^{\circ}\text{C}$ , unless otherwise noted. **Bold** indicates specifications over the full operating temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . (Note 1)

Parameter	Symbol	Min.	Тур.	Max.	Units	Conditions
All Parts						
	N			0.5	V	V <sub>IL</sub> (MAX)
Enable Input Voltage (Note 3)	V <sub>EN</sub>	1.5			V	V <sub>IH</sub> (MIN)
Enable Input Current	I <sub>EN</sub>		1	5	μA	$0V \le V_{EN} \le 5V$
Undervoltage Lock-Out	UVLO_TH	2	2.25	2.5	V	V <sub>IN</sub> Rising
Threshold		1.9	2.15	2.4		V <sub>IN</sub> Falling
Undervoltage Lock-Out Hysteresis	UVLO_HYS	_	0.1	_	V	—
Fault Status Output Voltage	V <sub>FAULT</sub>		0.25	0.4	V	I <sub>OL</sub> = 10 mA
		_	145	_	•	T <sub>J</sub> Increasing
Overtemperature Threshold	OT_TH		135	_	°C	T <sub>J</sub> Decreasing

# **AC ELECTRICAL CHARACTERISTICS**

Parameters	Symbol	Min.	Тур.	Max.	Units	Conditions
Output Turn-On Rise Time	t <sub>RISE</sub>	500	1000	1500	μs	
Delay before asserting or releasing FAULT/ MIC2003 - MIC2009 MIC2009A, MIC2005A	ŧ	20	32	49	ms	Time from current limiting to FAULT/ state change
Delay before asserting or releasing FAULT/ MIC2013 - MIC2019 MIC2019A	<sup>I</sup> D_FAULT	77	128	192	115	Time from I <sub>OUT</sub> continuously exceeding primary current limit condition to FAULT/ state change
Delay before current limiting MIC2013 - MIC2019 MIC2019A	t <sub>D_LIMIT</sub>	77	128	192	ms	_
Delay before resetting Kickstart current limit delay, t <sub>D_LIMIT</sub> MIC2013 - MIC2019 MIC2019A	t <sub>RESET</sub>	77	128	192	ms	Out of current limit following a current limit event.
Output Turn-On Delay	t <sub>ON_DLY</sub>	_	1000	1500	μs	$\label{eq:RL} \begin{array}{l} R_{L} = 43\Omega, \ C_{L} = 120 \ \muF, \\ V_{EN} = 50\% \ \text{to} \ V_{OUT} = 10\% \\ ^*C_{SLEW} = Open \end{array}$
Output Turn-Off Delay	t <sub>OFF_DLY</sub>			700	μs	$\label{eq:RL} \begin{array}{l} R_{L} = 43\Omega, \ C_{L} = 120 \ \muF, \\ V_{EN} = 50\% \ \text{to} \ V_{OUT} = 90\% \\ ^* C_{SLEW} = Open \end{array}$

**Note 1:** Specification for packaged product only.

2: Check the Ordering Information section to determine which parts are Active-High or Active-Low.

3: V<sub>IL</sub>(MAX) = Maximum positive voltage applied to the input which will be accepted by the device as a logic low. V<sub>IH</sub>(MAX) = Maximum positive voltage applied to the input which will be accepted by the device as a logic high.

**4:** Whenever C<sub>SLEW</sub> is present.

# **TEMPERATURE SPECIFICATIONS (Note 1)**

Parameters	Symbol	Min.	Тур.	Max.	Units	Conditions
Temperature Ranges						
Maximum Junction Temperature	TJ			+150	°C	—
Storage Temperature	Τ <sub>S</sub>	-65	—	+150	°C	—
Ambient Temperature Range	T <sub>A</sub>	-40		+85	°C	—
Lead Temperature	—	_	—	260	°C	Soldering, 10 sec.
Package Thermal Resistances (Note	<b>2</b> )					
Thermal Resistance, SOT-23-5/6	$\theta_{JA}$		230			
Thermal Registeres, 6 Load DEN	$\theta_{JA}$	—	90	—	°C/W	_
Thermal Resistance, 6-Lead DFN	$\theta_{JC}$		45			

**Note 1:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e., T<sub>A</sub>, T<sub>J</sub>, θ<sub>JA</sub>). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +150°C rating. Sustained junction temperatures above +150°C can impact the device reliability.

2: Requires proper thermal mounting to achieve this performance.

#### **Timing Diagrams**



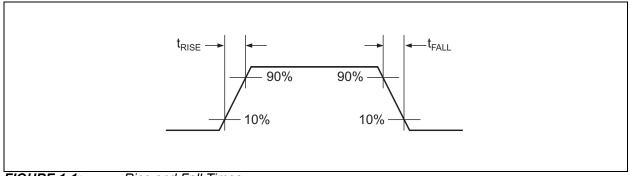



FIGURE 1-1: Rise and Fall Times.

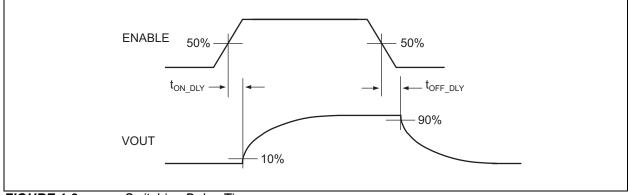




#### 2.0 TYPICAL PERFORMANCE CURVES

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

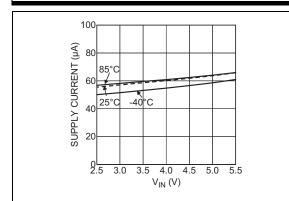





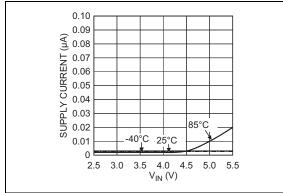


FIGURE 2-2: Supply Current Output Disnabled (MIC20XX).

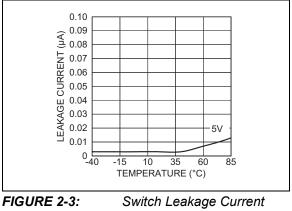

(MIC20XX).



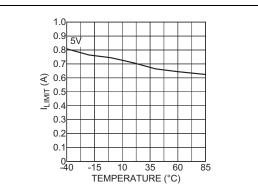


FIGURE 2-4: I<sub>LIMT</sub> vs. Temperature (MIC20XX-0.5).


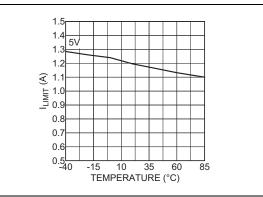


FIGURE 2-5: (MIC20XX-0.8).

I<sub>I IMT</sub> vs. Temperature

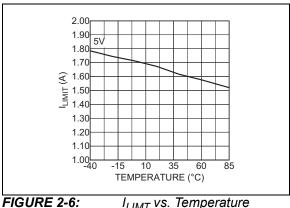

(MIC20XX-1.2).

I<sub>LIMT</sub> vs. Temperature

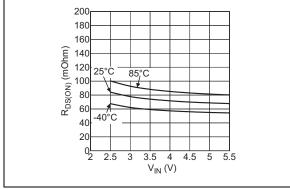


FIGURE 2-7:

R<sub>DS(ON)</sub> vs. V<sub>IN</sub> (MIC20XX).



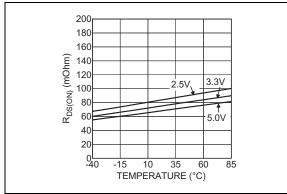


FIGURE 2-8: (MIC20XX).


R<sub>DS(ON)</sub> vs. Temperature

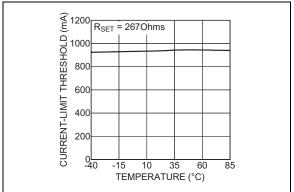

**FIGURE 2-9:** I<sub>LIMIT</sub> vs. Temperature (MIC20X9-0.9A).

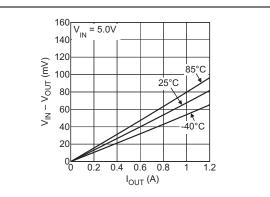

**FIGURE 2-10:** V<sub>DROP</sub> vs. Temperature (MIC20XX-1.2).

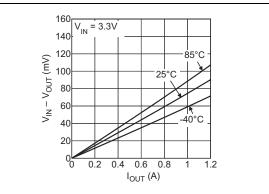

**FIGURE 2-11:** V<sub>DROP</sub> vs. Temperature (MIC20XX-1.2).

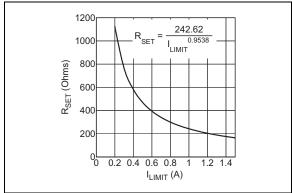


FIGURE 2-12:

R<sub>SET</sub> vs I<sub>LIMIT</sub> (MIC20X9).


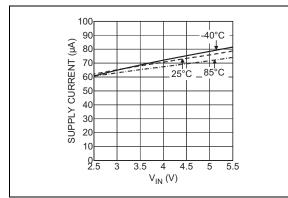


FIGURE 2-13: Supply Current Output Enabled (MIC20XXA).

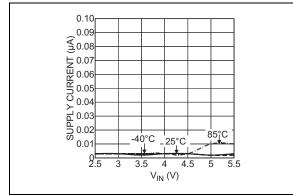

**FIGURE 2-14:** Supply Current Output Disabled (MIC20XXA).

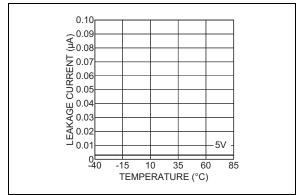


FIGURE 2-15: Switch Leakage Current (MIC20XXA).





FIGURE 2-16: I<sub>LIMT</sub> vs. Temperature (MIC20X5A).

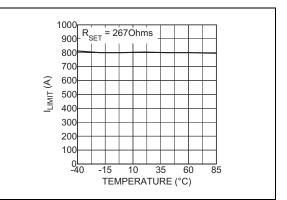

*FIGURE 2-17: I<sub>LIMT</sub> vs. Temperature* (*MIC20X9A-0.8A*).

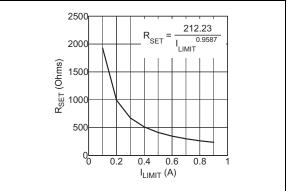


FIGURE 2-18: R<sub>SET</sub> vs I<sub>LIMIT</sub> (MIC20X9A).


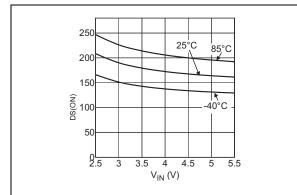


FIGURE 2-19: R<sub>DS(ON)</sub> vs. V<sub>IN</sub> (MIC20XXA).

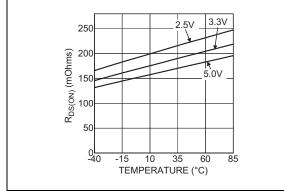

**FIGURE 2-20:** (MIC20XXA).

R<sub>DS(ON)</sub> vs. Temperature

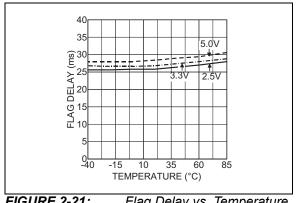



FIGURE 2-21:



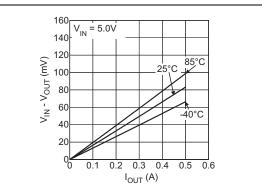


FIGURE 2-22: V<sub>DROP</sub> vs. Temperature (MIC20XXA).

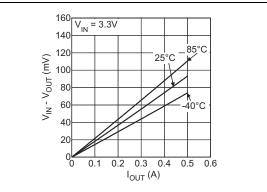


FIGURE 2-23: V<sub>DROP</sub> vs. Temperature (MIC20XXA).


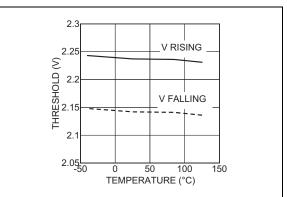


FIGURE 2-24: UVLO Threshold vs. Temperature.

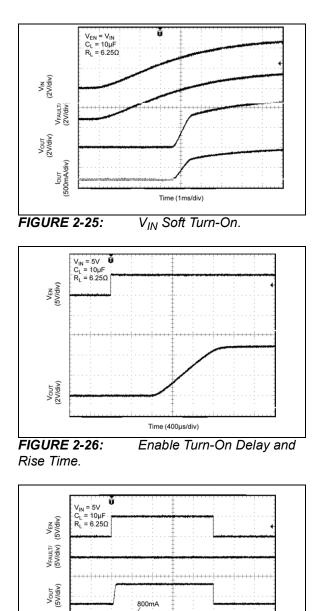


800mA

Time (10ms/div)

Enable Turn-On/Turn-Off.

l<sub>IN</sub> (500mA/div)

FIGURE 2-27:

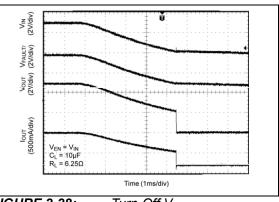

**FIGURE 2-28:** Turn-Off V<sub>IN</sub>.

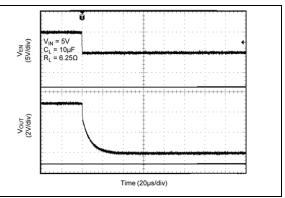
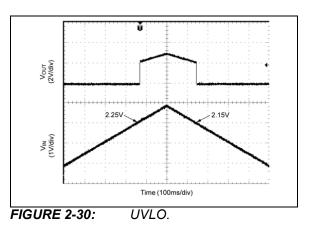


FIGURE 2-29: Enable Turn-Off Delay and Fall Time.



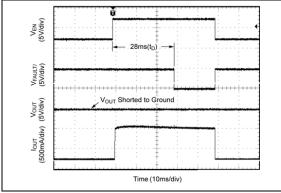


FIGURE 2-31: Enabled Into Short.

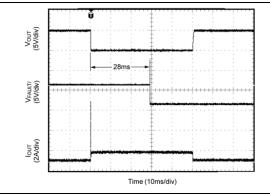


FIGURE 2-32: Current Limit Response, Stepped Short.

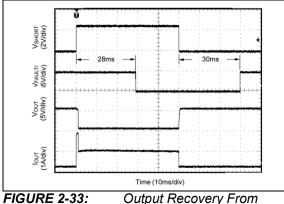


FIGURE 2-33 Short Circuit.

Output Recovery From



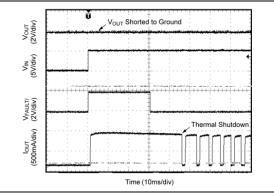



FIGURE 2-34: Power Up


Power Up Into Short Circuit.

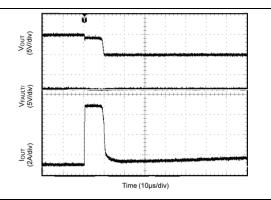

*FIGURE 2-35:* Current Limit Response Time, Stepped Short.

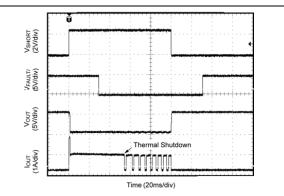



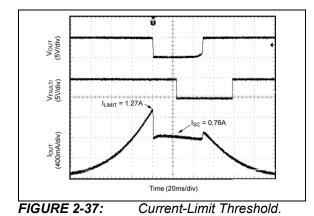

(MDA) (M

FIGURE 2-38: Kickstart Response 77 ms/2.2A Load Step.


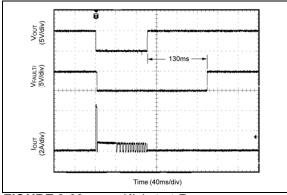


FIGURE 2-39: Kickstart Response Recovery From Thermal Shutdown.

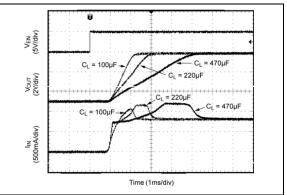

**FIGURE 2-40:** Current Inrush Current Response.


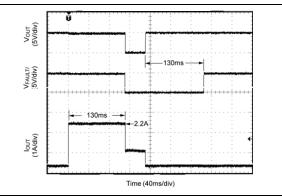


FIGURE 2-41: Kickstart Response 150 ms/2.2A Load Step

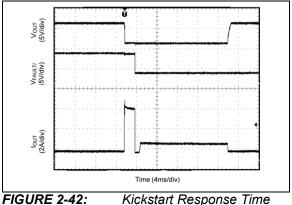

5A Over Load.

Kickstart Response Time

# 3.0 PIN DESCRIPTIONS

These pin and signal descriptions aid in the differentiation of a pin from electrical signals and components connected to that pin. For example, VOUT is the switch's output pin, while  $V_{OUT}$  is the electrical signal output voltage present at the VOUT pin. The descriptions of the pins are listed in Table 3-1.

Pin Name	Туре	Description
VIN	Input	Supply input. This pin provides power to both the output switch and the switch's internal control circuitry.
GND	—	Ground
EN	Input	Switch Enable (Input):
FAULT/	Output	Fault status. A logic low on this pin indicates the switch is in current limiting, or has been shut down by the thermal protection circuit. This is an open-drain output allowing logical OR'ing of multiple switches.
CSLEW	Input	Slew rate control. Adding a small value capacitor between this pin and VIN slows turn-on of the power FET.
VOUT	Output	Switch output. The load being driven by the switch is connected to this pin.
VUVLO	Input	Variable Under Voltage Lockout (VUVLO): Monitors the input voltage through a resistor divider between VIN and GND. Shuts the switch off if voltage falls below the threshold set by the resistor divider. Previously called VUVLO.
ILIMIT	Input	Set current limit threshold via a resistor connected from ILIMIT to GND.
EP	Thermal	On DFN packages connect EP to GND.

TABLE 3-1: PIN FUNCTION TABLE

#### TABLE 3-2: SIGNAL DESCRIPTION TABLE

Signal Name	Туре	Description
V <sub>IN</sub>	Input	Electrical signal input voltage present at the VIN pin.
GND	_	Ground
V <sub>EN</sub>	Input	Electrical signal input voltage present at the ENABLE pin.
V <sub>FAULT/</sub>	Output	Electrical signal output voltage present at the FAULT/ pin.
C <sub>SLEW</sub>	Component	Capacitance value connected to the CSLEW pin.
V <sub>OUT</sub>	Output	Electrical signal output voltage present at the VOUT pin.
V <sub>VUVLO_TH</sub>	Internal	VUVLO internal reference threshold voltage. This voltage is compared to the VUVLO pin input voltage to determine if the switch should be disabled. Reference threshold voltage has a typical value of 250 mV.
C <sub>LOAD</sub>	Component	Capacitance value connected in parallel with the load. Load capacitance.
I <sub>OUT</sub>	Output	Electrical signal output current present at the VOUT pin.
I <sub>LIMIT</sub>	Internal	Switch's current limit. Fixed at factory or user adjustable.

## 4.0 FUNCTIONAL DESCRIPTION

### 4.1 V<sub>IN</sub> and V<sub>OUT</sub>

 $V_{\rm IN}$  is both the power supply connection for the internal circuitry driving the switch and the input (Source connection) of the power MOSFET switch.  $V_{OUT}$  is the Drain connection of the power MOSFET and supplies power to the load. In a typical circuit, current flows from  $V_{\rm IN}$  to  $V_{OUT}$  toward the load. Since the switch is bi-directional when enabled, if  $V_{OUT}$  is greater than  $V_{\rm IN}$ , current will flow from  $V_{OUT}$  to  $V_{\rm IN}$ .

When the switch is disabled, current will not flow to the load, except for a small unavoidable leakage current of a few microamps. However, should  $V_{OUT}$  exceed  $V_{IN}$  by more than a diode drop (~0.6 V), while the switch is disabled, current will flow from output to input via the power MOSFET's body diode.

If discharging  $C_{LOAD}$  is required by your application, consider using MIC20X4 or MIC20X7; these MIC20XX family members are equipped with a discharge FET to be ensured complete discharge of  $C_{LOAD}$ .

#### 4.2 Current Sensing and Limiting

MIC20XX protects the system power supply and load from damage by continuously monitoring current through the on-chip power MOSFET. Load current is monitored by means of a current mirror in parallel with the power MOSFET switch. Current limiting is invoked when the load exceeds the set over current threshold. When current limiting is activated the output current is constrained to the limit value, and remains at this level until either the load/fault is removed, the load's current requirement drops below the limiting value, or the switch goes into thermal shutdown.

#### 4.3 Kickstart

TABLE 4-1: KICKSTART

2003	2004	2005X	2006	2007	2008	2009X
2013	2014	2015	2016	2017	2018	2019X

Note:	Only parts in bold have Kickstart
	(Not available in 5-pin SOT-23 packages).

The MIC201X is designed to allow momentary current surges (Kickstart) before the onset of current limiting, which permits dynamic loads, such as small disk drives or portable printers to draw the energy needed to overcome inertial loads without sacrificing system safety. In this respect, the Kickstart parts (MIC201X) differs markedly from the non-Kickstart parts (MIC200X) which immediately limit load current, potentially starving the motor and causing the appliance to stall or stutter. During this delay period, typically 128 ms, a secondary current limit is in effect. If the load demands a current in excess the secondary limit, MIC201X acts immediately to restrict output current to the secondary limit for the duration of the Kickstart period. After this time the MIC201X reverts to its normal current limit. An example of Kickstart operation is shown in Figure 4-1:

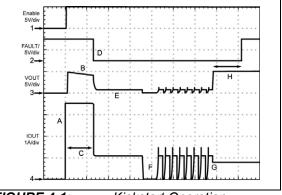


FIGURE 4-1: Kickstart Operation.

Figure 4-1 Label Key:

A. MIC201X is enabled into an excessive load (slew rate limiting not visible at this time scale). The initial current surge is limited by either the overall circuit resistance and power supply compliance, or the secondary current limit, whichever is less.

B. R<sub>ON</sub> of the power FET increases due to internal heating (effect exaggerated for emphasis).

- C. Kickstart period.
- D. Current limiting initiated. FAULT/ goes LOW.

E.  $V_{OUT}$  is non-zero (load is heavy, but not a dead short where  $V_{OUT}$  = 0V. Limiting response will be the same for dead shorts).

F. Thermal shutdown followed by thermal cycling.

G. Excessive load released, normal load remains. MIC201X drops out of current limiting.

H. FAULT/ delay period followed by FAULT/ going HIGH.

#### 4.4 Undervoltage Lockout

Undervoltage lock-out should be ensured no anomalous operation occurs before the device's minimum input voltage of UVLO<sub>THRESHOLD</sub> which is 2V minimum, 2.25V typical, and 2.5V maximum had been achieved. Prior to reaching this voltage, the output switch (power MOSFET) is OFF and no circuit functions, such as FAULT/ or ENABLE, are considered to be valid or operative.

#### 4.5 Variable Undervoltage Lockout

# TABLE 4-2:VARIABLE UNDERVOLTAGE<br/>LOCKOUT (VUVLO)

2003	2004	2005X	2006	2007	2008	2009X
2013	2014	2015	2016	2017	2018	2019X

Note: Only parts in **bold** have UVLO.

 $V_{UVLO}$  functions as an input voltage monitor when the switch in enabled. The VIN pin is monitored for a drop in voltage, indicating excessive loading of the  $V_{\rm IN}$  supply. When  $V_{\rm IN}$  is less than the  $V_{ULVO}$  threshold voltage ( $V_{VUVLO_TH}$ ) for 32 ms or more, the MIC20XX disables the switch to protect the supply and allow  $V_{\rm IN}$  to recover. After 128 ms has elapsed, the MIC20X6 enables switch. This disable and enable cycling will continue as long as  $V_{\rm IN}$  deceases below the  $V_{UVLO}$  threshold voltage ( $V_{VUVLO_TH}$ ) which has a typical value of 250 mV. The  $V_{UVLO}$  voltage is commonly established by a voltage divider from  $V_{\rm IN}$ -to-GND.

#### 4.6 Enable

2003	2004	2005X	2006	2007	2008	2009X
2013	2014	2015	2016	2017	2018	2019X

Note: Only parts in **bold** have ENABLE pin.

ENABLE pin is a logic compatible input which activates the main MOSFET switch thereby providing power to the VOUT pin. ENABLE is either an active HIGH or active LOW control signal. The MIC20XX can operate with logic running from supply voltages as low as 1.5 V.

ENABLE may be driven higher than  $V_{\rm IN},$  but no higher than 5.5V and not less than –0.3V.

#### 4.7 Fault/

TABL	E 4-4:	FAU	LT/			
2003	2004	2005X	2006	2007	2008	2009X
2013	2014	2015	2016	2017	2018	2019X

Note: Only parts in **bold** have FAULT/ pin.

FAULT/ is an N-channel open-drain output, which is asserted (LOW true) when switch either begins current limiting or enters thermal shutdown.

FAULT/ asserts after a brief delay when events occur that may be considered possible faults. This delay insures that FAULT/ is asserted only upon valid, enduring, over-current conditions and that transitory event error reports are filtered out.

In MIC200X FAULT/ asserts after a brief delay period, of 32 ms typical. After a fault clears, FAULT/ remains asserted for the delay period of 32 ms.

MIC201X's FAULT/ asserts at the end of the Kickstart period which is 128 ms typical. This masks initial current surges, such as would be seen by a motor load starting up. If the load current remains above the current limit threshold after the Kickstart has timed out, then the FAULT/ will be asserted. After a fault clears, FAULT/ remains asserted for the delay of 128 ms.

Because FAULT/ is an open-drain it must be pulled HIGH with an external resistor and it may be wire-OR'd with other similar outputs, sharing a single pull-up resistor. FAULT/ may be tied to a pull-up voltage source which is higher than  $V_{IN}$ , but no greater than 5.5V.

#### 4.8 Soft-Start Control

Large capacitive loads can create significant inrush current surges when charged through the switch. For this reason, the MIC20XX family of switches provides a built-in soft-start control to limit the initial inrush currents.

Soft-start is accomplished by controlling the power MOSFET when the ENABLE pin enables the switch.

#### 4.9 C<sub>SLEW</sub>

TABLE 4-5:	C <sub>SLEW</sub>
------------	-------------------

2003	2004	2005X	2006	2007	2008	2009X
2013	2014	2015	2016	2017	2018	2019X

**Note:** Only parts in **bold** have CSLEW pin. (Not available in 5-pin SOT-23 packages).

The CSLEW pin is provided to increase control of the output voltage ramp at turn-on. This input allows designers the option of decreasing the output's slew rate (slowing the voltage rise) by adding an external capacitance between the CSLEW and VIN pins.

#### 4.10 Thermal Shutdown

Thermal shutdown is employed to protect the MIC20XX family of switches from damage should the die temperature exceed safe operating levels. Thermal shutdown shuts off the output MOSFET and asserts the FAULT/ output if the die temperature reaches 145°C.

The switch will automatically resume operation when the die temperature cools down to 135°C. If resumed operation results in reheating of the die, another shutdown cycle will occur and the switch will continue cycling between ON and OFF states until the overcurrent condition has been resolved.

Depending on PCB layout, package type, ambient temperature, etc., hundreds of milliseconds may elapse from the incidence of a fault to the output MOSFET being shut off. This delay is due to thermal time constants within the system itself. In no event will the device be damaged due to thermal overload because die temperature is monitored continuously by on-chip circuitry.

# 5.0 APPLICATION INFORMATION

# 5.1 Setting ILIMIT

The MIC2009/2019's current limit is user programmable and controlled by a resistor connected between the ILIMIT pin and GND. The value of this resistor is determined by Equation 5-1:

#### **EQUATION 5-1:**

$$I_{LIMIT} = \frac{CurrentLimitFactor(CLF)}{R_{SET}}$$

or

#### **EQUATION 5-2:**

$$R_{SET} = \frac{CurrentLimitFactor(CLF)}{I_{LIMIT}(A)}$$

For example: Set I<sub>LIMIT</sub> = 1.25A

Please see Electrical Characteristics to find CLF at  $I_{\text{LIMIT}} = 1A$ .

#### TABLE 5-1: CLF AT ILIMIT = 1A

Min	Тур.	Max	Units
190	243	293	V

For the sake of this example, we will say the typical value of CLF at an  $I_{OUT}$  of 1A is 243V. Applying Equation 5-2:

#### **EQUATION 5-3:**

$$R_{SET}(\Omega) = \frac{243V}{1.25A} = 194.4\Omega$$

Where:  $R_{SET} = 196\Omega$  (the closest standard 1% value)

Designers should be aware that variations in the measured ILIMIT for a given  $R_{SET}$  resistor, will occur because of small differences between individual ICs (inherent in silicon processing) resulting in a spread of  $I_{\text{LIMIT}}$  values. In the example above we used the typical value of CLF to calculate  $R_{SET}$ . We can determine  $I_{\text{LIMIT}}$ 's spread by using the minimum and maximum values of CLF and the calculated value of  $R_{\text{SET}}$ .

#### **EQUATION 5-4:**

$$I_{LIMIT(MIN)} = \frac{190V}{196\Omega} = 0.97A$$
  
 $I_{LIMIT(MAX)} = \frac{293V}{196\Omega} = 1.5A$ 

Giving us a maximum  $\mathsf{I}_{\mathsf{LIMIT}}$  variation over temperature of:

- I<sub>LIMIT MIN</sub> = 0.97A (-22%)
- I<sub>LIMIT TYP</sub> =1.25A
- I<sub>LIMIT MAX</sub> = 1.5A (+20%)

I <sub>OUT</sub>	R <sub>SET</sub>	I <sub>LIMIT_MIN</sub>	I <sub>LIMIT_MAX</sub>			
0.1A	1928Ω	0.063A	0.136A			
0.2A	993Ω	0.137A	0.265A			
0.3A	673Ω	0.216A	0.391A			
0.4A	511Ω	0.296A	0.515A			
0.5A	413Ω	0.379A	0.637A			
0.6A	346Ω	0.463A	0.759A			
0.7A	299Ω	0.548A	0.880A			
0.8A	263Ω	0.634A	1.001A			
0.9A	235Ω	0.722A	1.121A			

#### TABLE 5-2: MIC20X9A R<sub>SET</sub> TABLE

#### TABLE 5-3: MIC20X9 R<sub>SET</sub> TABLE

I <sub>OUT</sub>	R <sub>SET</sub>	I <sub>LIMIT_MIN</sub>	I <sub>LIMIT_MAX</sub>
0.2A	1125Ω	0.127A	0.267A
0.3A	765Ω	0.202A	0.390A
0.4A	582Ω	0.281A	0.510A
0.5A	470Ω	0.361A	0.629A
0.6A	395Ω	0.443A	0.746A
0.7A	341Ω	0.526A	0.861A
0.8A	300Ω	0.610A	0.976A
0.9A	268Ω	0.695A	1.089A
1A	243Ω	0.781A	1.202A
1.1A	222Ω	0.868A	1.314A
1.2A	204Ω	0.956A	1.426A
1.3A	189Ω	1.044A	1.537A
1.4A	176Ω	1.133A	1.647A
1.5A	165Ω	1.222A	1.757A


# 5.2 I<sub>LIMIT</sub> vs. I<sub>OUT</sub> Measured

The MIC20XX's current-limiting circuitry, during current limiting, is designed to act as a constant current source to the load. As the load tries to pull more than the allotted current,  $V_{OUT}$  drops and the input to output voltage differential increases. When  $V_{IN} - V_{OUT}$  exceeds 1V,  $I_{OUT}$  drops below  $I_{LIMIT}$  to reduce the drain of fault current on the system's power supply and to limit internal heating of the switch.


When measuring  $I_{OUT}$  it is important to bear this voltage dependence in mind, otherwise the measurement data may appear to indicate a problem when none really exists. This voltage dependence is illustrated in Figure 5-1 and Figure 5-2.

In Figure 5-1, output current is measured as V<sub>OUT</sub> is pulled below V<sub>IN</sub>, with the test terminating when V<sub>OUT</sub> is 1V below V<sub>IN</sub>. Observe that once I<sub>LIMIT</sub> is reached I<sub>OUT</sub> remains constant throughout the remainder of the test. In Figure 5-2 this test is repeated but with V<sub>IN</sub> - V<sub>OUT</sub> exceeding 1V.

When  $V_{IN} - V_{OUT} > 1V$ , switch's current limiting circuitry responds by decreasing  $I_{OUT}$ , as can be seen in Figure 5-2. In this demonstration,  $V_{OUT}$  is being controlled and  $I_{OUT}$  is the measured quantity. In real life applications  $V_{OUT}$  is determined in accordance with ohm's law by the load and the limiting current.

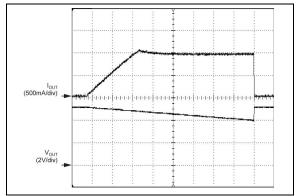


**FIGURE 5-1:**  $I_{OUT}$  in Current Limiting for  $VI_N - V_{OUT} < 1V$ .

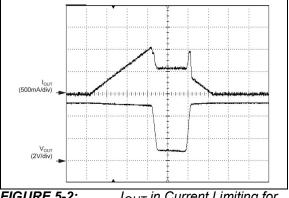


**FIGURE 5-2:**  $I_{OUT}$  in Current Limiting for  $V_{IN} - V_{OUT} > 1V$ .

This folding back of  $I_{LIMIT}$  can be generalized by plotting  $I_{LIMIT}$  as a function of  $V_{OUT}$ , as shown below in Figure 5-3 and Figure 5-4. The slope of  $V_{OUT}$  between  $I_{OUT} = 0V$  and  $I_{OUT} = I_{LIMIT}$  (where  $I_{LIMIT} = 1A$ ) is determined by  $R_{ON}$  of the switch and  $I_{LIMIT}$ .

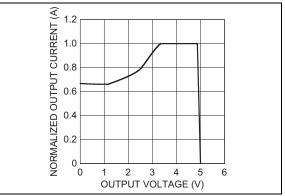

**FIGURE 5-3:** Normalized Output Current vs. Output Voltage (5V).

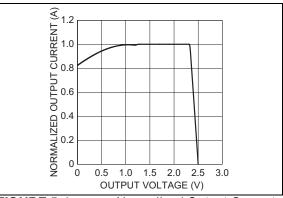

**FIGURE 5-4:** Normalized Output Current vs. Output Voltage (2.5V).


#### 5.3 CSLEW

TABLE	E 5-4:	CSL	EW			
2003	2004	2005X	2006	2007	2008	2009X
2013	2014	2015	2016	2017	2018	2019X

**Note:** Only parts in **bold** have CSLEW pin. (Not available in 5-pin SOT-23 packages).

The CSLEW pin is provided to increase control of the output voltage ramp at turn-on. This input allows designers the option of decreasing the output's slew rate (slowing the voltage rise) by adding an external capacitance between the CSLEW and VIN pins. This capacitance slows the rate at which the pass FET gate voltage increases and thus, slows both the response to an enable command as well as  $V_{OUT}$ 's ascent to its final value.

Figure 5-5 illustrates effect of CSLEW on turn-on delay and output rise time.

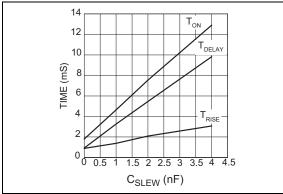

**FIGURE 5-5:** C<sub>SLEW</sub> vs. Turn-On, Delay and Rise Times.

#### 5.3.1 C<sub>SI FW</sub>'S EFFECT ON ILIMIT

An unavoidable consequence of adding  $C_{SLEW}$  capacitance is a reduction in the MIC20X5 - 20X8's ability to quickly limit current transients or surges. A sufficiently large capacitance can prevent both the primary and secondary current limits from acting in time to prevent damage to the MIC20X5 - 20X8 or the system from a short circuit fault. For this reason, the upper limit on the value of  $C_{SLEW}$  is 4 nF.

# 5.4 Variable Undervoltage Lockout (VUVLO)

# TABLE 5-5:VARIABLE UNDERVOLTAGE<br/>LOCKOUT (VUVLO)

2003	2004	2005X	2006	2007	2008	2009X
2013	2014	2015	2016	2017	2018	2019X


**Note:** Only parts in **bold** have VUVLO pin and functionility.

Power-conscious systems, such as those implementing ACPI, will remain active even in their low-power states and may require the support of external devices through both phases of operation. Under these conditions, the current allowed these external devices may vary according to the system's operating state and as such require dual current limits on their peripheral ports. The MIC20X6 is designed for systems demanding two primary current limiting levels but without the use of a control signal to select between current limits.


To better understand how the MIC20X6 provides this, imagine a system whose main power supply supports heavy loads during normal operation, but in sleep mode is reduced to only few hundred milliamps of output current. In addition, this system has several USB ports which must remain active during sleep. During normal operation, each port can support a 500 mA peripheral, but in sleep mode their combined output current is limited to what the power supply can deliver minus whatever the system itself is drawing.

If a peripheral device is plugged in which demands more current than is available, the system power supply will sag, or crash. The MIC20X6 prevents this by monitoring both the load current and  $V_{IN}$ . During normal operation, when the power supply can source plenty of current, the MIC20X6 will support any load up to its factory programmed current limit. When the weaker, standby supply is in operation, the MIC20X6 monitors  $V_{IN}$  and will shut off its output should  $V_{IN}$  dip below a predetermined value. This predetermined voltage is user programmable and set by the selection of the resistor divider driving the VUVLO pin.

To prevent false triggering of the VUVLO feature, the MIC20X6 includes a delay timer to blank out momentary excursions below the VUVLO trip point. If  $V_{IN}$  stays below the VUVLO trip point for longer than 32 ms (typical), then the load is disengaged and the MIC20X6 will wait 128 ms before reapplying power to the load. If  $V_{IN}$  remains below the VUVLO trip point, then the load will be powered for the 32 ms blanking period and then again disengaged. This is illustrated in the scope plot below. If  $V_{IN}$  remains above the VUVLO trip point MIC20X6 resumes normal operation.

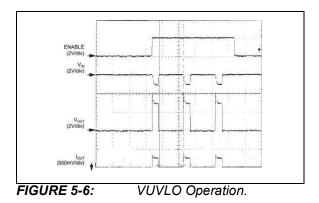

VUVLO and Kickstart operate independently in the MIC2016. If the high current surge allowed by Kickstart causes  $V_{IN}$  to dip below the VUVLO trip point for more than 32 ms, VUVLO will disengage the load, even though the Kickstart timer has not timed out.

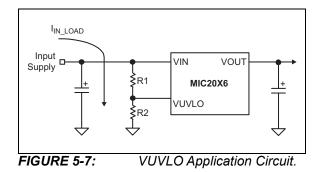

#### 5.4.1 CALCULATING VUVLO RESISTOR DIVIDER VALUES

The VUVLO feature is designed to keep the internal switch off until the voltage on the VUVLO pin is greater than 0.25V. A resistor divider network connected to the VUVLO and VIN pins is used to set the input trip voltage  $V_{TRIP}$  (see Figure 5-7). The value of R2 is chosen to minimize the load on the input supply IDIV and the value of R1 sets the trip voltage  $V_{TRIP}$ .

The value of R2 is calculated using:

EQUATION 5-5:

$$R2 = \frac{V_{VUVLO}}{I_{DIV}}$$

The value of R1 is calculated using:

#### **EQUATION 5-6:**

$$R1 = R2 \times \left(\frac{V_{TRIP}}{V_{VUVLO}} - 1\right)$$

Where for Equation 5-5 and Equation 5-6:  $V_{VUVLO}$  = 0.25V

When working with large value resistors, a small amount of leakage current from the VUVLO terminal can cause voltage offsets that degrade system accuracy. Therefore, the maximum recommended resistor value for R2 is  $100 \text{ k}\Omega$ .

Using the divider loading current  $I_{\text{DIV}}$  of 100  $\mu\text{A},$  the value of R2 can be estimated by:

#### **EQUATION 5-7:**

$$R2 = \frac{0.25V}{100\mu A} = 2.5k\Omega$$

Now the value of R1 can be calculated by:

#### **EQUATION 5-8:**

$$R1 = 2.5k\Omega \times \left(\frac{4.75V}{0.25V} - 1\right) = 45k\Omega$$

Where:

V <sub>TRIP</sub> =	4.75V (for a 5V supply)
V <sub>VUVLO</sub> =	0.25V

The VUVLO comparator uses no hysteresis. This is because the VUVLO blanking timer prevents any chattering that might otherwise occur if  $V_{\rm IN}$  varies about the trigger point. The timer is reset by upward crossings of the trip point such that  $V_{\rm IN}$  must remain below the trip point for the full 32 ms period for load disengagement to occur.

In selecting a  $V_{TRIP}$  voltage, the designer is cautioned to not make this value less than 2.5V. A minimum of 2.5V is required for the MIC20X6's internal circuitry to operate properly. VUVLO trip points below 2.5V will result in erratic or unpredictable operation.

#### 5.5 Kickstart

#### TABLE 5-6: KICKSTART

2003	2004	2005X	2006	2007	2008	2009X
2013	2014	2015	2016	2017	2018	2019X

Only parts in **bold** have Kickstart

(Not available in 5-pin SOT-23 packages).


Kickstart allows brief current surges to pass to the load before the onset of normal current limiting, which permits dynamic loads to draw bursts of energy without sacrificing system safety.

Functionally, Kickstart is a forced override of the normal current limiting function provided by the switch. The Kickstart period is governed by an internal timer which allows current to pass up to the secondary current limit ( $I_{LIMIT_2nd}$ ) to the load for 128 ms and then normal (primary) current limiting goes into action.

During Kickstart, a secondary current-limiting circuit is monitoring output current to prevent damage to the switch, as a hard short combined with a robust power supply can result in currents of many tens of amperes. This secondary current limit is nominally set at 4A and reacts immediately and independently of the Kickstart period. Once the Kickstart timer has finished its count the primary current limiting circuit takes over and holds  $I_{OUT}$  to its programmed limit for as long as the excessive load persists.

Once the switch drops out of current limiting the Kickstart timer initiates a lock-out period of 128 ms such that no further bursts of current above the primary current limit, will be allowed until the lock-out period has expired.

Kickstart may be over-ridden by the thermal protection circuit and if sufficient internal heating occurs, Kickstart will be terminated and  $I_{OUT} \rightarrow 0A$ . Upon cooling, if the load is still present  $I_{OUT} \rightarrow I_{LIMIT}$ , not  $I_{LIMIT_2nd}$ .

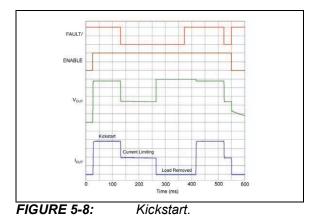

# 5.6 Automatic Load Discharge

# TABLE 5-7:AUTOMATIC LOADDISCHARGE

2003	2004	2005X	2006	2007	2008	2009X
2013	2014	2015	2016	2017	2018	2019X

Only parts in **bold** have automatic load discharge.

Automatic discharge is a valuable feature when it is desirable to quickly remove charge from the VOUT pin. This allows for a quicker power-down of the load. This also prevents any charge from being presented to a device being connected to the VOUT pin, for example, USB, 1394, PCMCIA, and CableCARD.

Automatic discharge is performed by a shunt MOSFET from VOUT pin to GND. When the switch is disabled, a break before make action is performed turning off the main power MOSFET and then enabling the shunt MOSFET. The total resistance of the MOSFET and internal resistances is typically  $126\Omega$ .

#### 5.7 Supply Filtering

A minimum 1  $\mu$ F bypass capacitor positioned close to the VIN and GND pins of the switch is both good design practice and required for proper operation of the switch. This will control supply transients and ringing. Without a bypass capacitor, large current surges or a short may cause sufficient ringing on V<sub>IN</sub> (from supply lead inductance) to cause erratic operation of the switch's control circuitry. For best-performance good quality, low-ESR capacitors are recommended, preferably ceramic.

When bypassing with capacitors of 10  $\mu$ F and up, it is good practice to place a smaller value capacitor in parallel with the larger to handle the high frequency components of any line transients. Values in the range of 0.01  $\mu$ F to 0.1  $\mu$ F are recommended. Again, good quality, low-ESR capacitors should be chosen.

#### 5.8 Power Dissipation

Power dissipation depends on several factors such as the load, PCB layout, ambient temperature, and supply voltage. Calculation of power dissipation can be accomplished by the following equation:

#### **EQUATION 5-9:**

$$P_D = R_{DS(ON)} \times (I_{OUT})^2$$

To relate this to junction temperature, the following equation can be used:

**EQUATION 5-10:** 


$$T_J = P_D \times R_{\theta(J-A)} + T_A$$

Where:

 $T_J =$  Junction temperature  $T_A =$  Ambient temperature

 $R_{\theta(J-A)}$  = The thermal resistance of the package


In normal operation the switch's  $R_{ON}$  is low enough that no significant I<sup>2</sup>R heating occurs. Device heating is most often caused by a short circuit, or very heavy load, when a significant portion of the input supply voltage appears across the switch's power MOSFET. Under these conditions the heat generated will exceed the package and PCB's ability to cool the device and thermal limiting will be invoked. In Figure 5-9, die temperature is plotted against  $I_{OUT}$  assuming a constant case temperature of 85°C. The plots also assume a worst case  $R_{ON}$  of 140 m $\Omega$  at a die temperature of 135°C. Under these conditions it is clear that an SOT-23 packaged device will be on the verge of thermal shutdown, typically 140°C die temperature, when operating at a load current of 1.25A. For this reason we recommend using DFN packaged switches for any design intending to supply continuous currents of 1A or more.

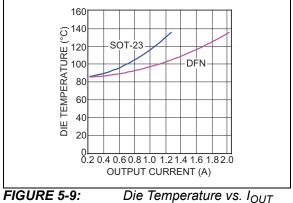

(T<sub>CASE</sub> = 85°C).


# 6.0 PACKAGING INFORMATION

#### 6.1 Package Marking Information

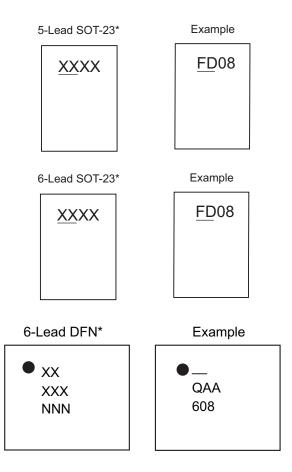

Legend:	Y YY WW NNN @3 *	Product code or customer-specific information Year code (last digit of calendar year) Year code (last 2 digits of calendar year) Week code (week of January 1 is week '01') Alphanumeric traceability code Pb-free JEDEC <sup>®</sup> designator for Matte Tin (Sn) This package is Pb-free. The Pb-free JEDEC designator (€3) can be found on the outer packaging for this package.
t t	be carried characters he corpor	nt the full Microchip part number cannot be marked on one line, it will d over to the next line, thus limiting the number of available of or customer-specific information. Package may or may not include ate logo. (_) and/or Overbar ( <sup>-</sup> ) symbol may not be to scale.




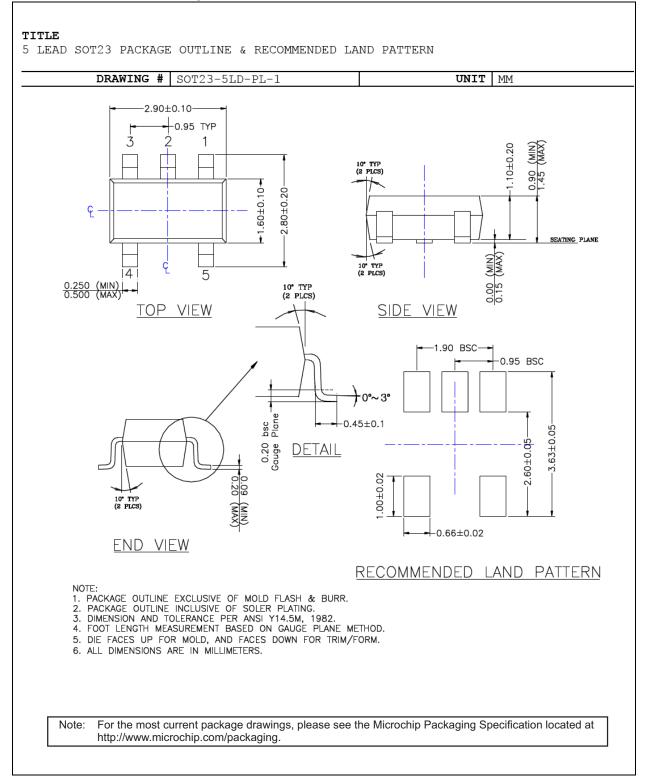


#### 6-Lead SOT-23 (M6) Package Outline & Recommended Land Pattern


#### TITLE

6 LEAD SOT23 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

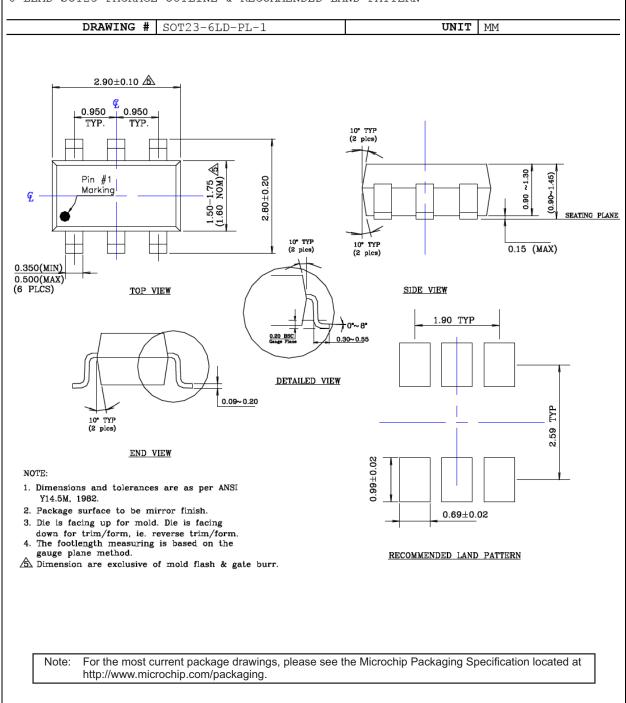

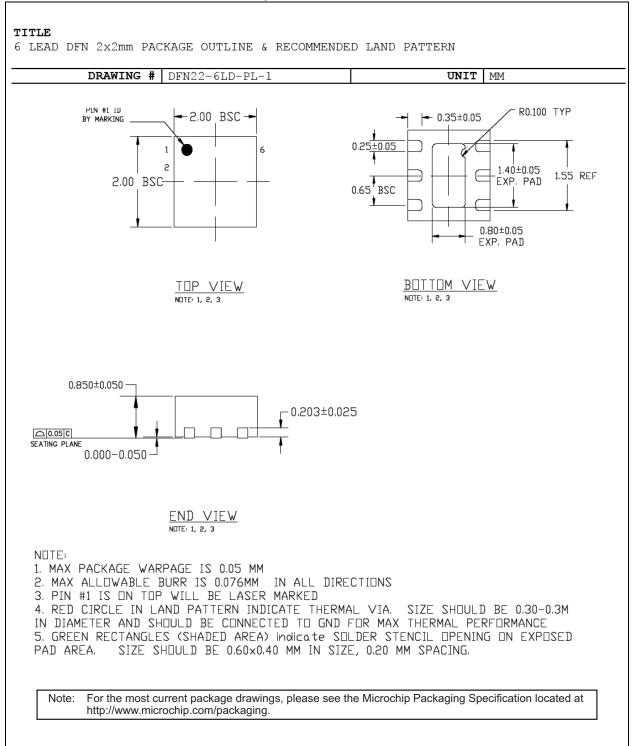

# 6-Lead SOT-23 (M6) Recommended Land Pattern

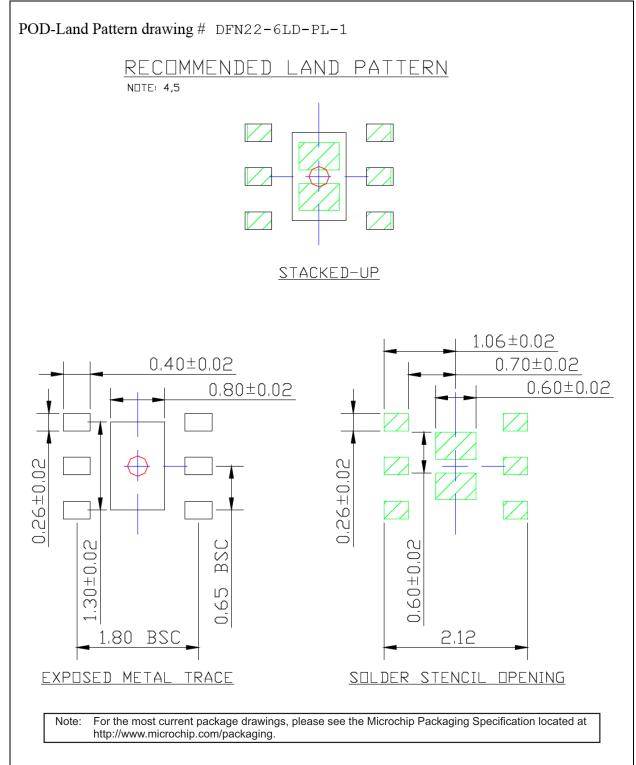

# APPENDIX A: REVISION HISTORY

#### **Revision A (January 2021)**

- Converted Micrel document MIC20XX to Microchip data sheet template DS20006486A.
- Minor grammatical text changes throughout.

# **Revision B (February 2021)**

 Figure 2-23 (V<sub>IN</sub> = 3.3V) was a repeat of Figure 2-22 (V<sub>IN</sub> = 5.0) by mistake and is the corrected graph now.

# **PRODUCT IDENTIFICATION SYSTEM**

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

Full Part No. (Note 1)	Marking ( <mark>Note 2</mark> )	Current Limit	Kickstart	Package	Media Type	
MIC2003-0.5YM5-TR	<u>FD</u> 05	0.5A				
MIC2003-0.8YM5-TR	<u>FD</u> 08	0.8A		5-Lead SOT-23	3,000/Reel	
MIC2003-1.2YM5-TR	<u>FD</u> 12	1.2A				
MIC2003-0.5YML-TR	D05	0.5A	No		5,000/Reel	
MIC2003-0.8YML-TR	D08	0.8A		6-Pin 2 mm x 2 mm DFN		
MIC2003-1.2YML-TR	D12	1.2A				
MIC2013-0.5YM5-TR	<u>FL</u> 05	0.5A				
MIC2013-0.8YM5-TR	<u>FL</u> 08	0.8A		5-Lead SOT-23	3,000/Reel	
MIC2013-1.2YM5-TR	<u>FL</u> 12	1.2A				
MIC2013-0.5YML-TR	L05	0.5A	Yes			
MIC2013-0.8YML-TR	L08	0.8A		6-Pin 2 mm x 2 mm DFN	5,000/Reel	
MIC2013-1.2YML-TR	L12	1.2A				
IIC2004/MIC2014						
MIC2004-0.5YM5-TR	<u>FE</u> 05	0.5A				
MIC2004-0.8YM5-TR	<u>FE</u> 08	0.8A		5-Lead SOT-23	3,000/Reel	
MIC2004-1.2YM5-TR	<u>FE</u> 12	1.2A				
MIC2004-0.5YML-TR	E05	0.5A	No	6-Pin 2 mm x 2 mm DFN	5,000/Reel	
MIC2004-0.8YML-TR	E08	0.8A				
MIC2004-1.2YML-TR	E12	1.2A				
MIC2014-0.5YM5-TR	<u>FM</u> 05	0.5A			3,000/Reel	
MIC2014-0.8YM5-TR	<u>EM</u> 08	0.8A		5-Lead SOT-23		
MIC2014-1.2YM5-TR	<u>FM</u> 12	1.2A				
MIC2014-0.5YML-TR	M05	0.5A	Yes		5,000/Reel	
MIC2014-0.8YML-TR	M08	0.8A		6-Pin 2 mm x 2 mm DFN		
MIC2014-1.2YML-TR	M12	1.2A				
IIC2005/MIC2015					•	
MIC2005-0.5YM6-TR	<u>FF</u> 05	0.5A				
MIC2005-0.8YM6-TR	<u>FF</u> 08	0.8A		6-Lead SOT-23	3,000/Reel	
MIC2005-1.2YM6-TR	<u>EE</u> 12	1.2A	Na			
MIC2005-0.5YML-TR	F05	0.5A	No		5,000/Reel	
MIC2005-0.8YML-TR	F08	0.8A		6-Pin 2 mm x 2 mm DFN		
MIC2005-1.2YML-TR	F12	1.2A				
MIC2015-0.5YM6-TR	<u>FN</u> 05	0.5A				
MIC2015-0.8YM6-TR	<u>FN</u> 08	0.8A		6-Lead SOT-23	3,000/Reel	
MIC2015-1.2YM6-TR	<u>FN</u> 12	1.2A	¥			
MIC2015-0.5YML-TR	N05	0.5A	Yes			
MIC2015-0.8YML-TR	N08	0.8A		6-Pin 2 mm x 2 mm DFN	5,000/Reel	
MIC2015-1.2YML-TR	N12	1.2A				

# **PRODUCT IDENTIFICATION SYSTEM (CONTINUED)**

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

Full Part No. Marking		Current Limit	Kickstart Package		Media Type	
MIC2005A				•	•	
MIC2005A-1YM5-TR	<u>FA</u> 51	0.5A		51 1007.00		
MIC2005A-2YM5-TR	<u>FA</u> 52	0.5A		5-Lead SOT-23	3,000/Reel	
MIC2005A-1YM6-TR	<u>FA</u> 53	0.5A	No			
MIC2005A-2YM6-TR	<u>FA</u> 54	0.5A		6-Lead SOT-23		
MIC2005L		· · ·				
MIC2005-0.5LYM5	<u>5L</u> FF	0.5A				
MIC2005-0.8LYM5	<u>8L</u> FF	0.8A	No	5-Lead SOT-23	3,000/Reel	
MIC2005-1.2LYM5	<u>4L</u> FF	1.2A				
MIC2006/MIC2016	•					
MIC2006-0.5YM6-TR	<u>FG</u> 05	0.5A				
MIC2006-0.8YM6-TR	<u>FG</u> 08	0.8A		6-Lead SOT-23	3,000/Reel	
MIC2006-1.2YM6-TR	<u>FG</u> 12	1.2A				
MIC2006-0.5YML-TR	<u>G0</u> 5	0.5A	No	6-Pin 2 mm x 2 mm DFN	5,000/Reel	
MIC2006-0.8YML-TR	<u>G0</u> 8	0.8A				
MIC2006-1.2YML-TR	<u>G1</u> 2	1.2A				
MIC2016-0.5YM6-TR	<u>FP</u> 05	0.5A			3,000/Reel 5,000/Reel	
MIC2016-0.8YM6-TR	<u>FP</u> 08	0.8A		6-Lead SOT-23		
MIC2016-1.2YM6-TR	<u>FP</u> 12	1.2A	Yes			
MIC2016-0.5YML-TR	P05	0.5A	163	6-Pin 2 mm x 2 mm DFN		
MIC2016-0.8YML-TR	P08	0.8A				
MIC2016-1.2YML-TR	P12	1.2A				
MIC2007/MIC2017						
MIC2007YM6-TR	<u>FH</u> AA		No	6-Lead SOT-23	3,000/Reel	
MIC2007YML-TR	HAA	0.2A - 2.0A	No	6-Pin 2 mm x 2 mm DFN	5,000/Reel	
MIC2017YM6-TR	<u>FQ</u> AA	0.2A - 2.0A	Yes	6-Lead SOT-23	3,000/Reel	
MIC2017YML-TR	QAA		Tes	6-Pin 2 mm x 2 mm DFN	5,000/Reel	
MIC2008/MIC2018						
MIC2008YM6-TR	<u>FJ</u> AA			6-Lead SOT-23	3,000/Reel	
MIC2008YML-TR	JAA		No	6-Pin 2 mm x 2 mm DFN	5,000/Reel	
MIC2018YM6-TR	<u>FR</u> AA	0.2A - 2.0A	Vr -	6-Lead SOT-23	3,000/Reel	
MIC2018YML-TR	RAA		Yes	6-Pin 2 mm x 2 mm DFN	5,000/Reel	
MIC2009/MIC2019						
MIC2009YM6-TR	<u>FK</u> AA			6-Lead SOT-23	3,000/Reel	
MIC2009YML-TR	KAA		No	6-Pin 2 mm x 2 mm DFN	5,000/Reel	
MIC2019YM6-TR	<u>FS</u> AA	0.2A - 2.0A		6-Lead SOT-23	3,000/Reel	
MIC2019YML-TR	SAA	1	Yes	6-Pin 2 mm x 2 mm DFN	5,000/Reel	

# **PRODUCT IDENTIFICATION SYSTEM (CONTINUED)**

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

Full Part No.	Marking	Current Limit	Kickstart	Package	Media Type			
MIC2009A/MIC2019A								
MIC2009A-1YM6-TR	FK1		No	6-Lead SOT-23	3,000/Reel			
MIC2009A-2YM6-TR	FK2	0.4.0.00			3,000/Reel			
MIC2019A-1YM6-TR	FS1	0.1A - 0.9A			3,000/Reel			
MIC2019A-2YM6-TR	FS2		Tes		3,000/Reel			

Note 1: All MIC20XX Family parts are RoHS-compliant lead .

2: Over/Under-bar symbol ( / \_ ) may not be to scale. On the package the over/under symbol begins above/below the first character of the marking.

#### TABLE 0-1: MIC20XX FAMILY MEMBER FUNCTIONALITY

Part Number			Pin Function						
Normal Limiting	Kickstart Note 1	I <sub>LIMIT</sub>	I <sub>LIMIT</sub>	ENABLE High	ENABLE Low	CSLEW	FAULT/	VUVLO Note 4	Load Discharge
2003	2013		_	—	—	_	_	—	—
2004	20014		_		—	—	—	—	<b>A</b>
2005	2015	Fixed Note 2	_		—			_	—
2005L	—		_	—		_		—	—
2005A-1	—		_		—	Note 5		—	—
2005A-2	—		_	—		Note 5		—	—
2006	2016		_		—		—		—
2007	2017				—		—	—	<b>A</b>
2008	2018	A 11			—		_	—	—
2009	2019	Adj. Note 3			—	_		—	—
2009A-1	2019A-1				_	_		_	_
2009A-2	2019A-2			—		_		—	—

Note 1: Kickstart provides an alternate start-up behavior; however, pin-outs are identical.

**2:** Fixed = Factory programmed current limit.

3: Adjustable = User adjustable current limit.

4: VUVLO = Variable UVLO (previously called DML).

5: CSLEW, while available in 6-pin package, not available in 5-pin package.

# MIC20XX

NOTES:

#### Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not
  mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are
  committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection
  feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or
  other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WAR-RANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDI-RECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUEN-TIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

#### Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackeTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries

 $\ensuremath{\mathsf{SQTP}}$  is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2021, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-7721-1

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.



# Worldwide Sales and Service

#### AMERICAS

**Corporate Office** 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: http://www.microchip.com/ support

Web Address: www.microchip.com

Atlanta Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455

Austin, TX Tel: 512-257-3370

**Boston** Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088

Chicago Itasca, IL Tel: 630-285-0071 Fax: 630-285-0075

Dallas Addison, TX Tel: 972-818-7423 Fax: 972-818-2924

Detroit Novi, MI Tel: 248-848-4000

Houston, TX Tel: 281-894-5983

Indianapolis Noblesville, IN Tel: 317-773-8323 Fax: 317-773-5453 Tel: 317-536-2380

Los Angeles Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608 Tel: 951-273-7800

Raleigh, NC Tel: 919-844-7510

New York, NY Tel: 631-435-6000

San Jose, CA Tel: 408-735-9110 Tel: 408-436-4270

Canada - Toronto Tel: 905-695-1980 Fax: 905-695-2078

#### ASIA/PACIFIC

Australia - Sydney Tel: 61-2-9868-6733

China - Beijing Tel: 86-10-8569-7000 China - Chengdu

Tel: 86-28-8665-5511 China - Chongqing Tel: 86-23-8980-9588

China - Dongguan Tel: 86-769-8702-9880

China - Guangzhou Tel: 86-20-8755-8029

China - Hangzhou Tel: 86-571-8792-8115

China - Hong Kong SAR Tel: 852-2943-5100

China - Nanjing Tel: 86-25-8473-2460

China - Qingdao Tel: 86-532-8502-7355

China - Shanghai Tel: 86-21-3326-8000

China - Shenyang Tel: 86-24-2334-2829

China - Shenzhen Tel: 86-755-8864-2200

China - Suzhou Tel: 86-186-6233-1526

China - Wuhan Tel: 86-27-5980-5300

China - Xian Tel: 86-29-8833-7252

China - Xiamen Tel: 86-592-2388138 China - Zhuhai

Tel: 86-756-3210040

#### ASIA/PACIFIC

India - Bangalore Tel: 91-80-3090-4444

India - New Delhi Tel: 91-11-4160-8631 India - Pune

Tel: 91-20-4121-0141 Japan - Osaka

Tel: 81-6-6152-7160

Japan - Tokyo Tel: 81-3-6880- 3770

Tel: 82-53-744-4301

Tel: 82-2-554-7200

Tel: 60-3-7651-7906

Taiwan - Hsin Chu

Taiwan - Kaohsiung

Taiwan - Taipei Tel: 886-2-2508-8600

Thailand - Bangkok Tel: 66-2-694-1351

Vietnam - Ho Chi Minh Tel: 84-28-5448-2100

Tel: 31-416-690399 Fax: 31-416-690340

EUROPE

Austria - Wels

Tel: 43-7242-2244-39

Tel: 45-4485-5910

Fax: 45-4485-2829

Tel: 358-9-4520-820

Tel: 33-1-69-53-63-20

Fax: 33-1-69-30-90-79

**Germany - Garching** 

Tel: 49-2129-3766400

Germany - Heilbronn

Germany - Karlsruhe

Tel: 49-7131-72400

Tel: 49-721-625370

Germany - Munich

Tel: 49-89-627-144-0

Fax: 49-89-627-144-44

Germany - Rosenheim

Tel: 49-8031-354-560

Israel - Ra'anana

Italy - Milan

Italy - Padova

Tel: 972-9-744-7705

Tel: 39-0331-742611

Fax: 39-0331-466781

Tel: 39-049-7625286

**Netherlands - Drunen** 

Tel: 49-8931-9700

Germany - Haan

Finland - Espoo

France - Paris

Fax: 43-7242-2244-393

**Denmark - Copenhagen** 

Norway - Trondheim Tel: 47-7288-4388

Poland - Warsaw Tel: 48-22-3325737

**Romania - Bucharest** Tel: 40-21-407-87-50

Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91

Sweden - Gothenberg Tel: 46-31-704-60-40

Sweden - Stockholm Tel: 46-8-5090-4654

**UK - Wokingham** Tel: 44-118-921-5800 Fax: 44-118-921-5820

Korea - Daegu Korea - Seoul

Malaysia - Kuala Lumpur

Malaysia - Penang Tel: 60-4-227-8870

Philippines - Manila Tel: 63-2-634-9065

Singapore Tel: 65-6334-8870

Tel: 886-3-577-8366

Tel: 886-7-213-7830