


SOLID CAPACITOR

PH Series

Aluminum Solid Electrolytic Capacitor
With Conductive Polymer

JAMICON®

- Height:8mmL
- Super low E.S.R. impedance and high heat resistance.
- Suitable for DC-DC converters, voltage regulators and decoupling applications used for computer motherboards etc.
- Endurance:105°C 2000 hours.




SPECIFICATION

Item	Characteristic										
Operation Temperature Range	-55 ~ +105°C										
Rated Working Voltage	2.5 ~ 16V										
Capacitance Tolerance (120Hz 20°C)	±20%										
Leakage Current (2min)	The initial specified value in Characteristic list										
Surge Voltage (20°C)	W.V.	2.5	4	6.3	10	16					
	S.V.	2.8	4.6	7.2	11.5	18.4					
Tangent of loss angle (120Hz)	The initial specified value or loss (in Characteristic list)										
Impedance Ratio	Impedance ratio at 100kHz										
	Rated Voltage (V)	2.5	4	6.3	10	16					
	-55°C / +20°C	≤1.25									
	+105°C / +20°C	≤1.25									
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 105°C										
	Capacitance Change	≤±20% of the initial measured value									
	Dissipation Factor	≤150% of the initial specified value									
	ESR	≤150% of the initial specified value									
	Leakage current	≤ initial specified value									
Bias Humidity Test	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to DC voltage at 60°C, 90 to 95% RH for 1000 hours										
	Capacitance Change	≤±20% of the initial measured value									
	Dissipation Factor	≤150% of the initial specified value									
	ESR	≤150% of the initial specified value									
	Leakage current	≤ initial specified value									
Surge Voltage Test	The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor ($R=1k\Omega$) and discharge for 5 minutes 30 seconds.										
	Capacitance Change	≤±20% of the initial measured value									
	Dissipation Factor	≤150% of the initial specified value									
	ESR	≤150% of the initial specified value									
Failure Rate	Leakage current										
	1% per 1000 hours maximum (Confidence level 60% at 105°C)										

DIMENSIONS (mm)

ϕD	8 x 8
F	3.5
D	0.6
α	1.0

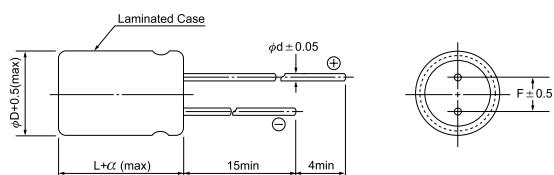

● CASE SIZE & CHARACTERISTICS LIST

Rated Voltage (V.DC)	Rated Capacitance (μF)	Case size		Leakage Current (μA)	Tangent of loss angle (max)	E. S. R. at 100kHz ($\text{m}\Omega$)	Allowable ripple current (mA.rms)	Part Number
		ϕD	L					
		(mm)						
2.5	560	8.0	8.0	450	0.06	6	6100	PHR561M0EF08W
	820	8.0	8.0	450	0.06	6	6100	PHR821M0EF08W
	1000	8.0	8.0	500	0.06	6	6100	PHR102M0EF08W
4	560	8.0	8.0	450	0.06	6	6100	PHR561M0GF08W
	680	8.0	8.0	544	0.06	6	6100	PHR681M0GF08W
	820	8.0	8.0	656	0.06	6	6100	PHR821M0GF08W
6.3	470	8.0	8.0	592	0.06	7	5700	PHR471M0JF08W
	560	8.0	8.0	706	0.06	7	5700	PHR561M0JF08W
	680	8.0	8.0	857	0.06	7	5700	PHR681M0JF08W
10	330	8.0	8.0	660	0.06	9	5000	PHR331M1AF08W
16	180	8.0	8.0	576	0.06	10	4360	PHR181M1CF08W