


ZNREF062

6.2V LOW POWER PRECISION REFERENCE SOURCE

The ZNREF062 is a monolithic integrated circuit providing a precise stable reference voltage of 6.17V at 500 μ A. The circuit features a knee current of 150 μ A and operation over a wide range of temperatures and currents.

The ZNREF062 is available in a 3-pin metal can package with pin 2 offering a trim facility whereby the output voltage can be adjusted as shown in Fig.1. This facility is used when compensating for system errors or setting the reference output to a particular value. When the trim facility is not used, pin 2 should be left open circuit.

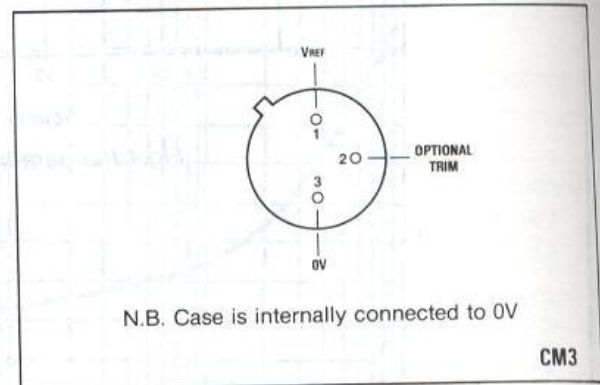

Pin connections (bottom view)

FEATURES

- Trimmable Output
- Excellent Temperature Stability
- Low Output Noise Figure
- Available in Two Temperature Ranges
- 1 and 2% Initial Voltage Tolerance Versions Available
- No External Stabilising Capacitor required in most cases
- Low Slope Resistance

ORDERING INFORMATION

Device type	Tol. (%)	Temperature Range
ZNREF062 A1	1	-55°C to +125°C
ZNREF062 C1	1	0°C to +70°C
ZNREF062 C2	2	0°C to +70°C

ABSOLUTE MAXIMUM RATINGS

Reference current	50mA*
Power dissipation	300mW
Operating temperature range	See ordering information
Storage temperature range	-55°C to +175°C
Soldering temperature for a maximum time of 10s	
Within 1/16 in of the seating plane	300°C
Within 1/32 in of the seating plane	265°C

* Below -25°C this figure should be linearly derated to 20mA at +110°C.

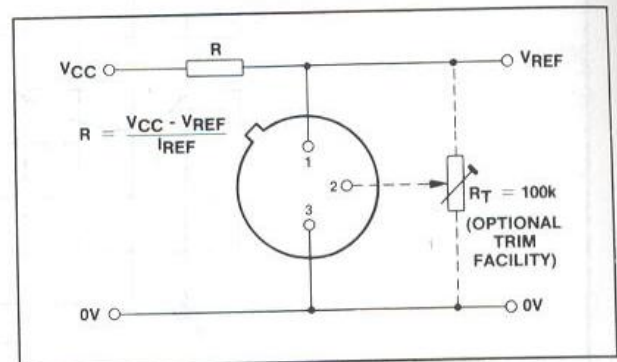


Fig.1 ZNREF062 application circuit

TEMPERATURE DEPENDENT ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Initial voltage tolerance %	Grade AB -55 to 110°C		Grade C 0 to 70°C		Units
			Typ.	Max.	Typ.	Max.	
Output voltage change over relevant temperature range (See note (a))	ΔV_{REF}	1 & 2	26	40	6.5	22	mV
Output voltage temperature coefficient (See note (b))	TCV_{REF}	1 & 2	25	40	15	50	ppm/°C

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$ and Pin 2 o/c unless otherwise specified).

Parameter	Symbol	Min.	Typ.	Max.	Units	Comments
Output voltage 1% tolerance (AB C1) 2% tolerance (C2)	V_{REF}	6.11 6.05	6.17 6.17	6.23 6.29	V	$I_{REF} = 500\mu\text{A}$
Output voltage adjustment range	ΔV_{TRIM}	-	± 5	-	%	$R_T = 100\text{k}\Omega$
Change in TCV_{REF} with output adjustment	$TC\Delta V_{TRIM}$	-	0.8	-	ppm/°C/%	
Operating current range	I_{REF}	0.15	-	50	mA	See note (c)
Turn-on time	t_{on}	-	40	-	μs	$R_L = 1\text{k}\Omega$
Turn-off time	t_{off}	-	0.3	-	μs	
Output voltage noise (over the range 0.1 to 10Hz)	e_{npp}	-	50	-	μV	Peak to peak measurement
Slope resistance	R_{REF}	-	2	3	Ω	$I_{REF} = 0.5\text{mA}$ to 5mA , See note (d)

NOTES

- (a) **Output change with temperature (ΔV_{REF})**
The absolute maximum difference between the maximum output voltage and the minimum output voltage over the specified temperature range

$$\Delta V_{REF} = V_{max} - V_{min}$$

- (b) **Output temperature coefficient (TCV_{REF})**
The ratio of the output change with temperature to the specified temperature range expressed in ppm/°C.

$$TCV_{REF} = \frac{\Delta V_{REF} \times 10^6}{V_{REF} \times \Delta T} \text{ ppm/}^\circ\text{C}$$

ΔT = Full temperature change.

- (c) **Operating current (I_{REF})**
Maximum operating current must be derated as indicated in maximum ratings.

- (d) **Slope resistance (R_{REF})**
The slope resistance is defined as $R_{REF} = \frac{\text{change in } V_{REF}}{\text{overspecified current range}}$
 $\Delta I_{REF} = 5 - 0.5 = 4.5\text{mA}$ (typically)

- (e) **Line regulation**
The ratio of change in output voltage to the change in input voltage producing it.

$$\frac{R_{REF} \times 100}{V_{REF} \times R_s} \% / V \quad R_s = \text{Source resistance}$$

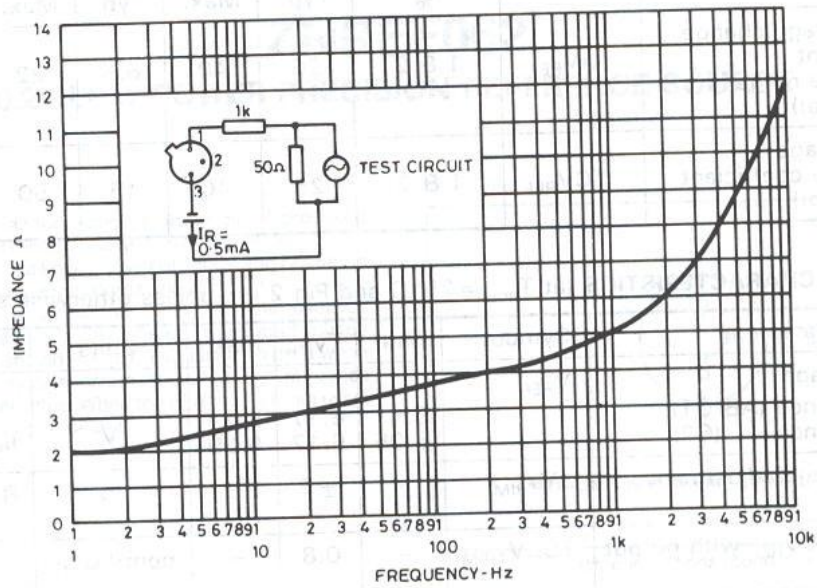


Fig.2 Dynamic impedance (typical)

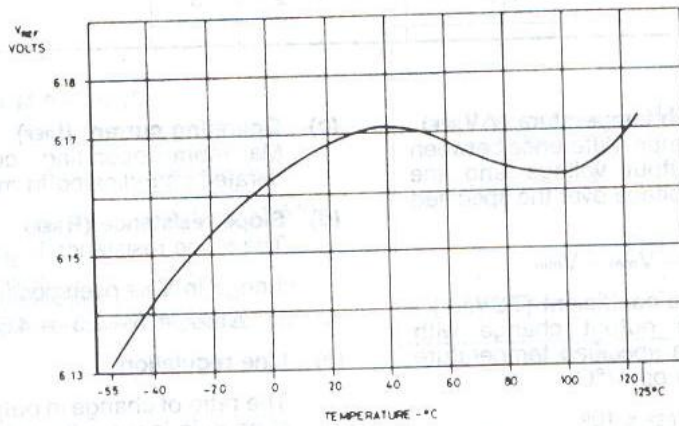


Fig.3 Typical temperature characteristics

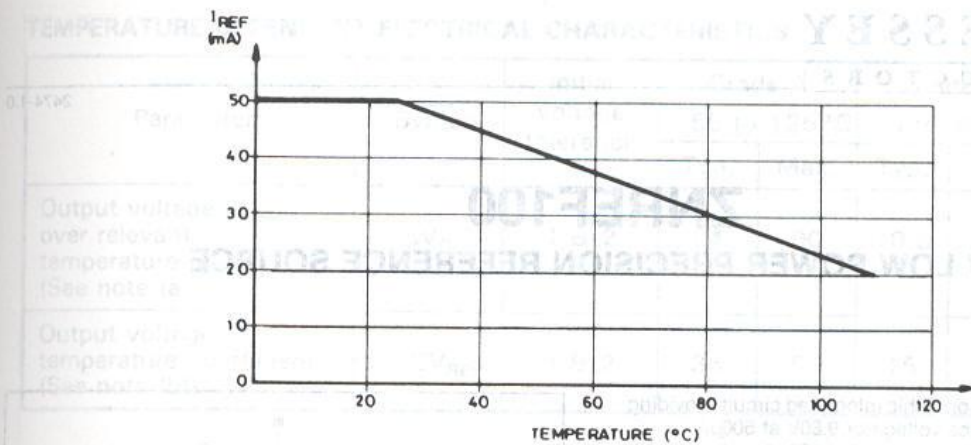


Fig.4 I_{REF} derating for ZNREF062



ORDERING INFORMATION

Temperature Range	Part Number
-55°C to +125°C	ZNREF062A
0°C to +70°C	ZNREF062B
0°C to +70°C	ZNREF062C



NOTES

(a) The output voltage is specified at 25°C. The output voltage is guaranteed over the full operating temperature range.

(b) The output voltage is specified at 25°C. The output voltage is guaranteed over the full operating temperature range.

The ZNREF062 is a precision reference source. It provides a stable output voltage over a wide temperature range. The output voltage is specified at 25°C and is guaranteed over the full operating temperature range.

FEATURES

- Low Temperature Coefficient
- Low Output Impedance
- Low Power Consumption
- Wide Operating Temperature Range

ABSOLUTE MAXIMUM RATINGS

Reference current (I_{REF}): 50 mA (max)

Output current (I_{OUT}): 10 mA (max)

Operating temperature range: -55°C to +125°C

Storage temperature range: -65°C to +150°C

Maximum power dissipation: 500 mW (typical)

REGULATION

Line regulation: ±0.01% (typical)

Load regulation: ±0.01% (typical)

Temperature coefficient: ±0.01% (typical)