

TEST REPORT IEC 62133-2

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems

Report reference No	DSP23020476-1
Tested by (name+ signature):	Henry Li
Compiled by (name+ signature):	
Approved by (name+ signature):	Ailis Ma Ailis Ma
Date of issue:	2023-03-15
Total number of pages:	26 Pages.
Name of Testing Laboratory preparing the Report:	Dongguan ZRLK Testing Technology Co., Ltd. Building 2, No.1, Technology 10th Road, Songshan Lake Park, Dongguan, Guangdong, China
Applicant's name	Ropla Elektronik Sp. z o.o.
Address:	ul. Wrocławska 1C, 52-200 Suchy Dwór
Manufacturer's name	Ropla Elektronik Sp. z o.o.
Address:	ul. Wrocławska 1C, 52-200 Suchy Dwór
Test specification:	
Standard:	IEC 62133-2:2017/AMD1:2021
Test procedure:	Type approved
Procedure deviation:	N/A
Non-standard test method:	N/A
This test report is specially limited	to the above client company and product model only, It may not
be duplicated without prior written	consent of Dongguan ZRLK Testing Technology Co., Ltd.
Test item description	Polymer Lithium-Ion Battery
Trade Mark:	Akyga Battery
Model/type reference:	LP523450
Ratings:	3.7V, 1000mAh, 3.7Wh







Par	ticulars: test item vs. test requ	uirements				
Clas	ssification of installation and use	e:	To be defin	ed in final product		
Sup	ply connection	:	DC connec	tor		
Disc	charge current (0,2 It A)	:	200mA			
Upp	er limit charging voltage per cel	II:	4.23V			
Cha	Charging temperature upper limit					
Cha	rging temperature lower limit	:	0°C			
Sha	pe of Cell	:	Prismation	0		
			igtimes Pouch			
			Coin/but			
Doly	/mer cell electrolyte type		gel polyr			
i Oiy			☐ Solid pol	ymer		
Pos	sible test case verdicts:					
- tes	st case does not apply to the tes	st object:	N/A			
- tes	st object does meet the requiren	nent:	P(ass)			
- tes	st object does not meet the requ	irement:	F(ail)			
Tes	ting:					
Date	e of receipt of test item	:	2023-02-10)		
Date	e(s) of performance of test	:	2023-02-10	to 2023-03-03		
Ger	General remarks:					
"(se	e remark #)" refers to a remark	appended to the repo	rt,			
•	e appended table)" refers to a ta	••	•			
	bughout this report a comma is		-			
	test results presented in this re		-	a, pproval of the testing laboratory,		
		•)17/AMD1:2021 (Optional remark).	_	
	ne and address of factory (ies) .			,		
	······································		•	vska 1C, 52-200 Suchy Dwór		
Ger	neral product information:					
ovei	The Polymer Lithium-Ion Batter rcharge, over-discharge, over ci					
010	• •		•	cified working conditions (as given	l	
belo	below), which are provided by client;					
ſ	Details information of the batte	-		-	1	
	Product Medal No	Polymer Lithium-		Polymer Lithium-Ion Battery		
	Model No. Nominal voltage	LP523450 3.7V		LP523450 3.7V		
	Noninal Voltage	0.1 V		0.7 V	1	

1000mAh

Rated capacity

1000mAh



	Recommend charging method declared by the manufacturer	Charging the cel (200mA) constar 4.2V constant vo current reaches	nt current, Itage until	Charging the battery with 0.2C (200mA) constant current, 4.2V constant voltage until current reaches 0.01C (10mA)
	Maximum charging current	500r	nA	500mA
	Maximum discharge current	3000	mA	3000mA
	Maximum charging voltage	4.23	3V	4.23V
	Specified final voltage	3.0'	V	3.0V
Sur	nmary of testing:	<u>.</u>		
Tes	ts Performed (name of test ar	nd test clause):	Testing locat	ion:
1	ts are made with the number of	samples	Dongguan ZR	LK Testing Technology Co., Ltd.
	cified in Table 1 of IEC 62133- 017/AMD1:2021.			.1, Technology 10th Road, Songshan
	t items:		Lake Park, Do	ngguan, Guangdong, China
	.6.2 Design recommendation;			
	.1 Charging procedure for test p	urnoses.		
	.2.1 Continuous charging at cor	•		
(cel		5		
	.2.2 Case stress at high ambien ttery);	t temperature		
cl.7	.3.1 External short-circuit (cell);			
cl.7	.3.2 External short-circuit (batte	ry);		
cl.7	.3.3 Free fall;			
cl.7	.3.4 Thermal abuse (cells);			
	.3.5 Crush (cells);			
	.3.6 Over-charging of battery;			
	.3.7 Forced discharge (cells);	N N		
	.3.8 Mechanical tests (batteries .3.9 Design evaluation – Forceo	•		
circ	uit (cells);			
cl.8	.2 Small cell and battery safety	information.		
poly	e electrolyte type of this cell doe mer, and the additional test cl.7 to evaluate the cell.			
	The product fulfils the require 33-2: 2017/A1: 2021	ments of <u>EN</u>		
Tes	t conclusion:			
	The Polymer Lithium-Ion Bati	terv submitted by I	Ropla Elektronik S	Sp. z o.o. are tested according to IEC


The Polymer Lithium-Ion Battery submitted by Ropla Elektronik Sp. z o.o. are tested according to IEC 62133-2 Secondary cells and batteries containing alkaline or other non-acid electrolytes Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications.

Test result: Pass.




Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

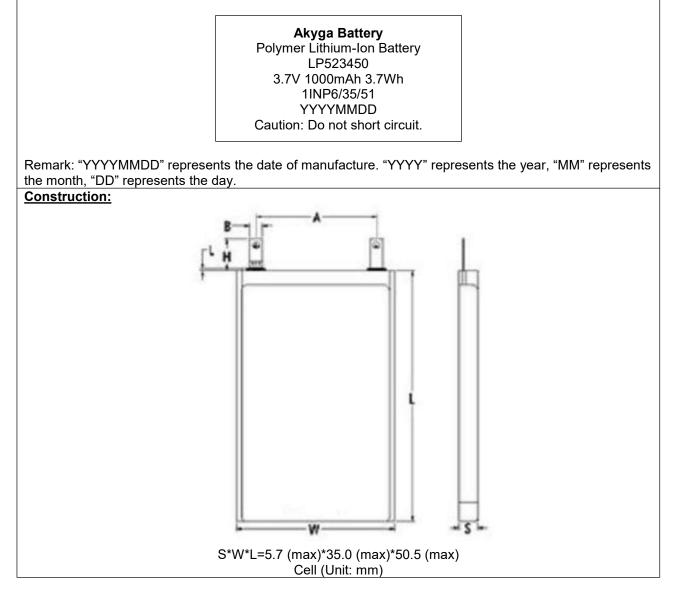



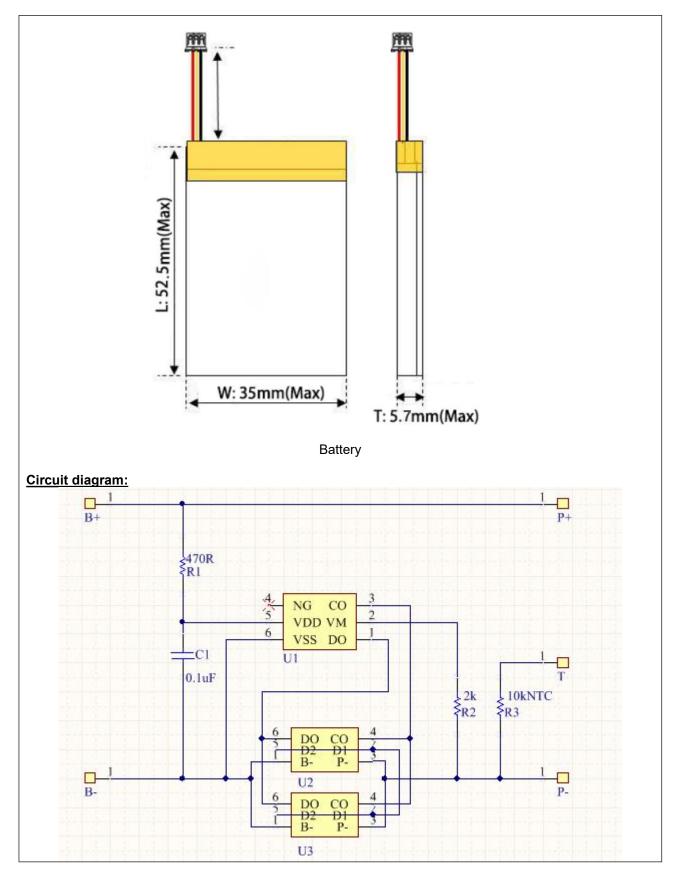



	IEC 62133-2		
Clause	Requirement + Test	Result - Remark	Verdict

4	PARAMETER MEASUREMENT TOLERANCES	Р
	Parameter measurement tolerances	Р

5	GENERAL SAFETY CONSIDERATIONS		Р
5.1	General		Р
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		Р
5.2	Insulation and wiring		Р
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 M Ω	No metal surface exists.	N/A
	Insulation resistance (MΩ)	N/A	_
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		Ρ
	Orientation of wiring maintains adequate clearances and creepage distances between conductors		Р
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		Р
5.3	Venting		Р
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism exists on the narrow side of pouch cell.	Р
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
5.4	Temperature, voltage and current management		Р
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, over discharge, over current and short-circuit proof circuit used in this battery, see tests of clause 7.	Ρ
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	Р
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in the manufacturer's specification.	Ρ
5.5	Terminal contacts		Р



	IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict	
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC connector complied with the requirements.	Р	
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance	DC connector complied with the requirements.	Р	
	Terminal contacts are arranged to minimize the risk of short circuits		Р	
5.6	Assembly of cells into batteries		Р	
5.6.1	General		Р	
	Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region	Protective circuit equipped on battery.	Ρ	
	This protection may be provided external to the battery such as within the charger or the end devices		N/A	
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A	
	If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions		N/A	
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly	Current, voltage and temperature limits specified by cell manufacturer.	Ρ	
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A	
	Protective circuit components are added as appropriate and consideration given to the end- device application		Ρ	
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance	Safety analysis report provided by manufacturer.	Ρ	
5.6.2	Design recommendation		Р	
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2	Charging voltage of cell: 4.23V, not exceed 4.23V specified in Clause 7.1.2, Table 2.	Ρ	



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection		N/A
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage	Final voltage of battery: 3.0V, not exceed the final voltage specified by cell manufacturer.	Р
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system		N/A
5.6.3	Mechanical protection for cells and components of batteries		Р
	Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse	Mechanical protection for cell connections and control circuits provided.	Р
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product	Build-in batteries, mechanical protection for cells should be provided by end product.	N/A
	The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer	To be evaluated in final system.	N/A
	For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests		N/A
5.7	Quality plan	Complied.	Р



Report No.: DSP23020476-2						
	IEC 62133-2					
Clause	Requirement + Test	Result - Remark	Verdict			
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Quality plan provided.	P			
5.8	Battery safety components		N/A			

6	TYPE TEST AND SAMPLE SIZE		Р
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		Р
	The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3Ω are tested in accordance with Table 1	Not coin cells	N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of 20 $^\circ$ C ± 5 $^\circ$ C		Р
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection		Р
	When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test	See clause 7.3.2.	Р

7	SPECIFIC REQUIREMENTS AND TESTS	Р
7.1	Charging procedure for test purposes	Р
7.1.1	First procedure	Р
	This charging procedure applies to subclauses other than those specified in 7.1.2	Р
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 $^{\circ}C \pm 5 ^{\circ}C$, using the method declared by the manufacturer	Р
	Prior to charging, the battery has been discharged at 20 $^{\circ}C \pm 5 ^{\circ}C$ at a constant current of 0,2 It A down to a specified final voltage	Р
7.1.2	Second procedure	Р
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9	Р



	IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict	
	After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method	Charge temperature 0-45°C declared; 45°C used for upper limit test temperature; 0°C used for lower limit test temperature.	Ρ	
7.2	Intended use		Р	
7.2.1	Continuous charging at constant voltage (cells)	Tested complied.	Р	
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer	Charging for 7 days with 200mA and 4.2V.	Р	
	Results: no fire, no explosion, no leakage:	(See appended table 7.2.1)	Р	
7.2.2	Case stress at high ambient temperature (battery)	Tested as client requested.	Р	
	Oven temperature (°C):	70	—	
	Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells	No physical distortion of the battery.	Р	
7.3	Reasonably foreseeable misuse		Р	
7.3.1	External short-circuit (cell)	Tested complied.	Р	
	The cells were tested until one of the following occurred:		Р	
	- 24 hours elapsed; or		N/A	
	- The case temperature declined by 20 % of the maximum temperature rise		Р	
	Results: no fire, no explosion	(See appended table 7.3.1)	Р	
7.3.2	External short-circuit (battery)	Tested complied.	Р	
	The batteries were tested until one of the following occurred:		Р	
	- 24 hours elapsed; or		N/A	
	- The case temperature declined by 20 % of the maximum temperature rise		Ρ	
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		Ρ	
	A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test	Shorting single fault conducted on two samples.	Ρ	



	IEC 62133-2		1
Clause	Requirement + Test	Result - Remark	Verdict
	A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field- effect transistor), fuse, thermostat or positive temperature coefficient (PTC) thermistor	Shorting single fault applies on MOSFET U2 (Pin1-Pin3) and U3 (Pin1-Pin3).	Р
	Results: no fire, no explosion	(See appended table 7.3.2)	Р
7.3.3	Free fall	Tested complied.	Р
	Results: no fire, no explosion	No fire. No explosion	Р
7.3.4	Thermal abuse (cells)	Tested complied.	Р
	Oven temperature (°C):	130	_
	Results: no fire, no explosion	No fire. No explosion	Р
7.3.5	Crush (cells) Tested complied.		Р
	The crushing force was released upon:		Р
	- The maximum force of 13 kN \pm 0,78 kN has been applied; or		Р
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: no fire, no explosion	(See appended table 7.3.5)	Р
7.3.6	Over-charging of battery		Р
	The supply voltage which is:		Р
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or	5.922V applied.	Р
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and		N/A
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached	2.0A applied.	Р
	Test was continued until the temperature of the outer casing:		Р
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		N/A
	- Returned to ambient		Р
	Results: no fire, no explosion	(See appended table 7.3.6)	Р
7.3.7	Forced discharge (cells)	Tested complied.	Р
	Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer		Р
	The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage		Р



		Report No.: DSP23	020476-1
	IEC 62133-2		
Clause	Requirement + Test	Result - Remark	Verdict
	- The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	- The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration		P
	Results: no fire, no explosion	(See appended table 7.3.7)	Р
7.3.8	Mechanical tests (batteries)		Р
7.3.8.1	Vibration	Tested complied.	Р
	Results: no fire, no explosion, no rupture, no leakage or venting:	(See appended table 7.3.8.1)	Р
7.3.8.2	Mechanical shock	Tested complied.	Р
	Results: no leakage, no venting, no rupture, no explosion and no fire:	(See appended table 7.3.8.2)	Р
7.3.9	Design evaluation – Forced internal short-circuit (cells)	Tested complied.	Р
	The cells complied with national requirement for:	France, Japan, Republic of Korea and Switzerland	—
	The pressing was stopped upon:		Р
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	400 N for prismatic cells.	Р
	Results: no fire:	(See appended table 7.3.9)	Р

8	INFORMATION FOR SAFETY		Р
8.1	General		Р
	Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products	Information for safety mentioned in manufacturer's specifications.	Р
	Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users	Information for safety mentioned in manufacturer's specifications.	Р
	Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user		N/A
	Do not allow children to replace batteries without adult supervision		N/A



Report No.: DSP2302			3020476-1			
	IEC 62133-2					
Clause	Requirement + Test	Result - Remark	Verdict			
		1				
8.2	Small cell and battery safety information	Not small cell and battery.	N/A			
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A			
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N/A			
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A			
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A			

9	MARKING		Р
9.1	Cell marking	The final product is battery	N/A
	Cells are marked as specified in IEC 61960, except coin cells		N/A
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
9.2	Battery marking		Р
	Batteries are marked as specified in IEC 61960, except for coin batteries	See marking plate on page 4.	Ρ
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity	Not coin battery	N/A
	Batteries are marked with an appropriate caution statement	Batteries also marked with an appropriate caution statement	Ρ
	- Terminals have clear polarity marking on the external surface of the battery, or	DC connector used.	N/A
	- Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections	Keyed external connectors can prevent reverse polarity connections.	Ρ
9.3	Caution for ingestion of small cells and batteries	Not small cell and battery.	N/A
	Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2		N/A
	Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package		N/A
9.4	Other information		Р



	IEC 62133-2		
Clause	Requirement + Test	Result - Remark	Verdict
			1
	The following information are marked on or supplied with the battery:		P
	- Storage and disposal instructions	Information for storage and disposal instructions mentioned in manufacturer's specifications.	Р
	- Recommended charging instructions	Information for recommended charging instructions mentioned in manufacturer's specifications.	Р

10	PACKAGING AND TRANSPORT		N/A
	Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3	Not coin cells.	N/A

ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		Р
A.1	General		Р
A.2	Safety of lithium ion secondary battery	Complied	Р
A.3	Consideration on charging voltage	Complied	Р
A.3.1	General		Р
A.3.2	Upper limit charging voltage	4.23V	Р
A.3.2.1	General		Р
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.23V applied.	N/A
A.4	Consideration of temperature and charging current		Р
A.4.1	General		Р
A.4.2	Recommended temperature range	See A.4.2.2.	Р
A.4.2.1	General		Р
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 0-45°C	Р
A.4.3	High temperature range	Not higher than the temperature range specific in this standard.	N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range	45°C applied	N/A
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A



	IEC 62133-2		
Clause	Requirement + Test	Result - Remark	Verdict
A.4.4	Low temperature range	Charging low temperature declared by client is: 0°C	Р
A.4.4.1	General		Р
A.4.4.2	Explanation of safety viewpoint		Р
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range	0°C applied	Р
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range No documents provided by manufacturer explaining the lower limit exceed 10°C, 0°C applied for testing in this report for safety considerations.		Р
A.4.5	Scope of the application of charging current		Р
A.4.6	Consideration of discharge		Р
A.4.6.1	General		Р
A.4.6.2	Final discharge voltage and explanation of safety viewpointCell specified final voltage 3.0V.		Р
A.4.6.3	Discharge current and temperature range		Р
A.4.6.4	Scope of application of the discharging current		Р
A.5	Sample preparation		Р
A.5.1	General		Р
A.5.2	Insertion procedure for nickel particle to generate internal short		Р
A.5.3	Disassembly of charged cell		Р
A.5.4	Shape of nickel particle		Р
A.5.5	Insertion of nickel particle in cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle in winding core		N/A
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		N/A
A.5.6	Insertion of nickel particle in prismatic cell		Р
A.6	Experimental procedure of the forced internal short-circuit test		Р
A.6.1	Material and tools for preparation of nickel particle		Р
A.6.2	Example of a nickel particle preparation procedure		Р
A.6.3	Positioning (or placement) of a nickel particle		Р
A.6.4	Damaged separator precaution		Р
A.6.5	Caution for rewinding separator and electrode		Р
A.6.6	Insulation film for preventing short-circuit		Р
A.6.7	Caution when disassembling a cell		Р
A.6.8	Protective equipment for safety		Р



	IEC 62133-2				
Clause	Requirement + Test	Result - Remark	Verdict		
					
A.6.9	Caution in the case of fire during disassembling		P		
A.6.10	Caution for the disassembling process and pressing the electrode core		Р		
A.6.11	Recommended specifications for the pressing device		Р		

ANNEX B RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS

N/A

N/A

ANNEX C RECOMMENDATIONS TO THE END-USERS

ANNEX D MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS N/A D.1 General Not coin cells. N/A D.2 Method N/A A sample size of three coin cells is required for this N/A measurement Coin cells with an internal resistance greater than 3 (See appended table D.2) N/A Ω require no further testing.....: Coin cells with an internal resistance less than or N/A equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1

- ANNEX E PACKAGING AND TRANSPORT N/A
- ANNEX F COMPON

COMPONENT STANDARDS REFERENCES

N/A



IEC 62133-2				
Clause	Requirement + Test	Result - Remark	Verdict	

7.2.1	TABLE:	Continuous charging	g at constant voltage	(cells)		Р
Sample	No.	Recommended charging voltage Vc (Vdc)	Recommended charging current I _{rec} (A)	OCV before test (Vdc)	Resi	ults
Cell	1#	4.20	0.2	4.19	Р	
Cell	2#	4.20	0.2	4.19	Р	
Cell	3#	4.20	0.2	4.19	Р	
Cell 4	4#	4.20	0.2	4.19	Р	
Cell	5#	4.20	0.2	4.19	Р	
Supplemer	ntary info	rmation:				
- No fire or	explosion	I				
- No leakag	е					

.3.1	TAB	LE: External short	circuit (cell)				Р
Sample I	No.	Ambient (°C)	OCV at start of test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ∆T (°C)	Re	esults
		Samples charg	ged at charging te	mperature uppe	r limit (45°C)		
Cell 6#	ŧ	57.3	4.20	82	111.4		Р
Cell 7#	ŧ	57.3	4.21	85	109.6		Р
Cell 8#	ŧ	57.3	4.20	78	111.1		Р
Cell 9#	ŧ	57.3	4.21	81	106.6		Р
Cell 10	#	57.3	4.20	80	112.5		Р
		Samples cha	ged at charging t	emperature lowe	r limit (0°C)		
Cell 11	#	57.3	4.14	82	111.9		Р
Cell 12	#	57.3	4.15	80	111.1		Р
Cell 13	#	57.3	4.15	79	118.6		Р
Cell 14	#	57.3	4.14	83	113.0		Р
	#	57.3	4.14	85	113.6		Р



IEC 62133-2

Clause	Requirement + Test	Result - Remark	Verdict	
Olause			Verdier	

7.3.2	TABLE: Externa	l short circuit (l	pattery)			Р
Sample No	o. Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ∆T (°C)	Component single fault condition	Results
Battery 4#	21.0	4.19	82	111.9	MOSFET U2 (Pin1-Pin3) S-C	Ρ
Battery 5#	21.0	4.19	84	111.8	MOSFET U3 (Pin1-Pin3) S-C	Ρ
Battery 6#	21.0	4.19	80	21.2		Р
Battery 7#	21.0	4.19	81	21.3		Р
Battery 8#	21.0	4.19	85	21.3		Р

- No fire or explosion

-S-C: short circuit

3.5	TABLE	: Crush (cells)			P	
Samp	le No.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
		Samples charged at c	harging temperature u	pper limit (45°C)		
Cell	29#	4.21	4.21	13	Р	
Cell	30#	4.20	4.20	13	Р	
Cell	31#	4.21	4.21	13	Р	
Cell	32#	4.20	4.20	13	Р	
Cell	33#	4.21	4.21	13	Р	
		Samples charged at	charging temperature	lower limit (0°C)		
Cell	34#	4.14	4.14	13	Р	
Cell	35#	4.14	4.14	13	Р	
Cell	36#	4.15	4.15	13	Р	
Cell	37#	4.15	4.15	13	Р	
Cell	38#	4.14	4.14	13	Р	

- No fire or explosion

Note: A 13kN force applied at the wide side of prismatic cells.



		IEC 62133-2		
Clause	Requirement + Test		Result - Remark	Verdict

7.3.6	TABL	E: Over-charging of bat	tery				Р
Constant c	harging	g current (A)	:	.: 2.0			
Supply voltage (Vdc):				5.922			
Sample	No.	OCV before charging (Vdc)	Total char (min	rging time iute)	Maximum outer case temperature (°C)	Re	sults
Battery 2	12#	3.39	10)2	27.9		Р
Battery 2	13#	3.38	10)2	28.6		Р
Battery 2	14#	3.38	10)2	28.6		Р
Battery 2	15#	3.38	10)2	30.6		Р
•)2	30.5		Р

- No fire or explosion

7.3.7	TABL	E: Forced discharge (ce	ells)			
Sample	No.	OCV before application of reverse charge (Vdc)	Measured reverse charge It (A)	Lower limit discharge voltage (Vdc)	Resu	ılts
Cell 39#		3.31	1.0	3.0	Р	
Cell 40)#	3.32	1.0	3.0	Р	
Cell 4	1#	3.33	1.0	3.0	Р	
Cell 42	2#	3.32	1.0	3.0	Р	
Cell 43# 3.33		1.0	3.0	Р		
Supplemei - No fire or	•	formation:				



		IEC 62133-2		
Clause	Requirement + Test		Result - Remark	Verdict

7.3.8.1	TAB	LE: Vibration				Р
Sample No) .	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results
Battery 17	#	4.19	4.18	18.960	18.958	Р
Battery 18	#	4.19	4.18	18.979	18.975	Р
Battery 19	#	4.19	4.17	18.896	18.889	Р
Supplementa	ary i	nformation:	11			

- No fire or explosion

- No rupture

- No leakage

- No venting

7.3.8.2	TAE	3LE: Mechanical shock					Р
Sample I	No.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Re	sults
Battery 2	:0#	4.19	4.18	18.954	18.952		Р
Battery 2	:1#	4.19	4.17	19.009	19.007		Р
Battery 2	2#	4.19	4.17	18.862	18.861		Р
Suppleme	ntary i	information:					
- No fire or	explos	sion					
- No rupture	e						
- No leakag	e						
- No venting	g						



	IEC 62133-2		
Clause	Requirement + Test	Result - Remark	Verdict

7.3.9	TAB	LE: Forced interna	l short circuit (ce	ells)		P	
Sample	No.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location ¹⁾	Maximum applied pressure (N)	Results	
		Samples charg	ed at charging te	emperature uppe	er limit (45°C)		
Cell 44	#	45	4.20	1	400	Р	
Cell 45	#	45	4.20	1	400	Р	
Cell 46	#	45	4.20	1	400	Р	
Cell 47	#	45	4.20	1*	400	Р	
Cell 48	#	45	4.20	1*	400	Р	
		Samples charg	ged at charging t	emperature lowe	er limit (0°C)		
Cell 49	#	0	4.13	1	400	Р	
Cell 50	#	0	4.14	1	400	Р	
Cell 51	#	0	4.14	1	400	Р	
Cell 52	#	0	4.14	1*	400	Р	
Cell 53	#	0	4.14	1*	400	Р	

Supplementary information:

¹⁾ Identify one of the following:

1: Nickel particle inserted between positive and negative (active material) coated area.

2: Nickel particle inserted between positive aluminium foil and negative active material coated area.

*: No location 2 exist.

- No fire

D.2	TABLE: Internal AC resistance for coin cells							
Sample no.		Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results ¹⁾			
Supplementary information:								



IEC 62133-2

Clause F

Requirement + Test

Result - Remark


Verdict


Object / part No.	Manufacturer/					
	trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾ 	
Connector	SHENZHEN ZHIMING ELECTRONICS CO.,LTD.	HA200A-3Y	3 Pin, Working Temperature: -25°C to +85°C			
Wiring	Shenzhen Dingyu Electrical Technology Co Ltd	1571	26AWG, 80°C, 30Vac	UYL 758	UL E365423	
Wiring (Alternative)	Interchangeable	Interchangeable	26AWG minimum, Min. 80°C, Min. 30Vac	UL 758	UL approved	
PCB	SHENZHEN XING BAO SHUN ELECTRONICS SCIENTIFIC CO LTD	XBS-8	V-0, 130°C	UL 796 UL 94	UL E361977	
PCB (Alternative)	Interchangeable	Interchangeable	V-0, Min. 130°C	UL 796 UL 94	UL approved	
Protect IC (U1)	SHEN ZHEN XIN FEI HONG ELECTRONICS CO.,LTD	FH9261-G3M	Overcharge protection voltage: 4.280±0.025V, Overdischarge protection voltage: 2.80±0.05V, T _{OP} : -40 ~ +85°C		Tested with appliance	
MOSFET (U2, U3)	SHEN ZHEN XIN FEI HONG ELECTRONICS CO.,LTD	FH8205A	V _{DS} : 20V, V _{GS} : ±12V, I _D : 5A (T _J =25°C), T _J : -55 To 150°C		Tested with appliance	
Cell	Ropla Elektronik Sp. z o.o.	LP523450	3.7V, 1000mAh	IEC 62133- 2:2017/AM D1:2021	Tested with appliance	
-Electrolyte	Anhui Xingli New Energy Co., Ltd.	ZN-29	LiPF ₆ +EC+DEC			
-Separator	ShenZhen Xuran Electronic Co.,Ltd.	16µm*35.5mm	PE+Al ₂ O ₃ , 16µm(T), Shutdown temperature: 135-140°C			
-Negative electrode	Dongguan XinMao New Energy Tech Co.,Ltd.	C06	Graphite			
-Positive	Hunan Kingfuli new	KP-05C	LiNi _x Co _y Mn _{1-x-y} O ₂ , Ni:			
electrode -Aluminium plastic film	energy co.,Ltd. Advanced Material Tech Co.,Ltd	C467	Co: Mn= 5: 2: 3 116µm(T), Nylon, PP, Aluminium			
Supplementa	ry information:		liance. See OD-CB2039.			




Photos


Model: LP523450

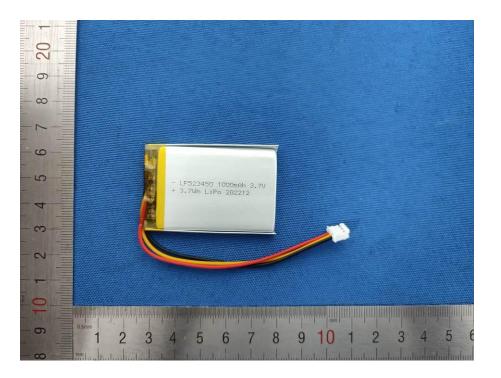

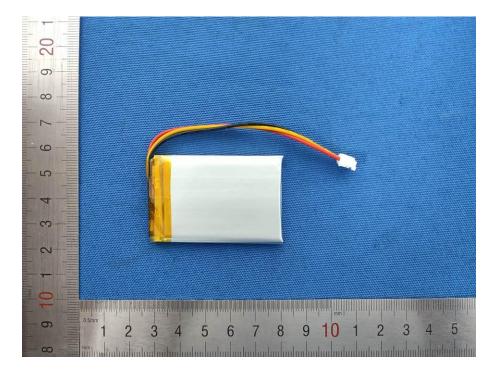




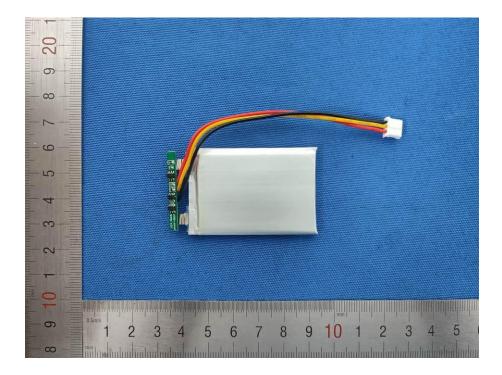

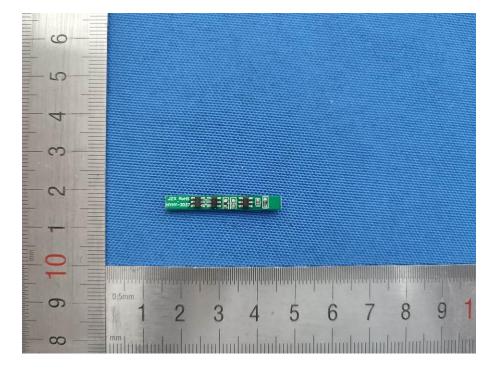




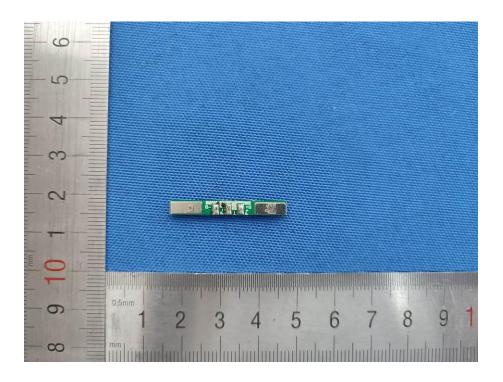





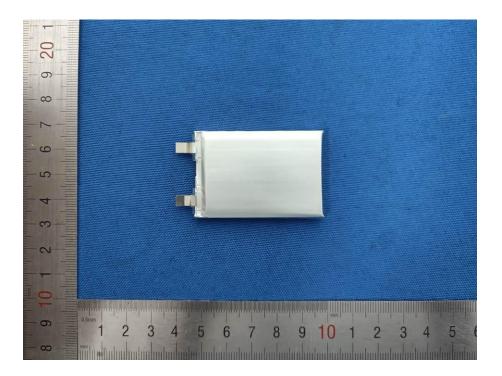

*** End of Test Report ***