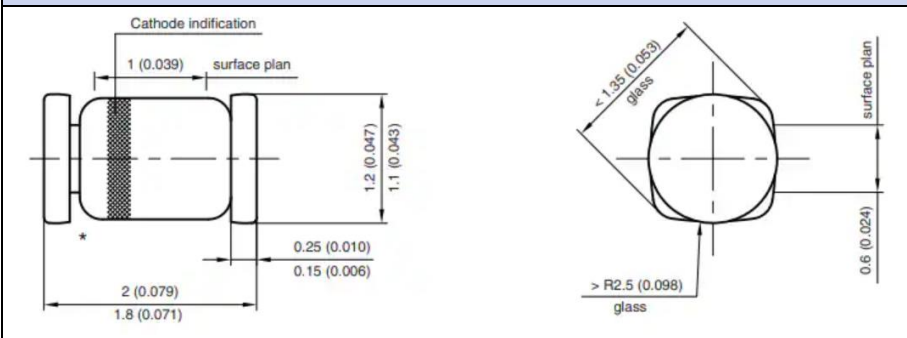


SMD Rectifying Diode

Primary characteristics		
Parameter	Value	Unit
V_{RM}	100	V
$I_{F(AV)}$	200	mA

Features



- **MicroMELF** case for easy automatic insertion.
- Pb-Free and **RoHS** Compliant
- Fits onto SOD-323/SOT-23 footprints
- Electrical data identical with the device 1N4148

Case dimensions
 <p>The diagram shows two views of the MicroMELF diode. The left view is a side profile with dimensions: cathode indication width 1 (0.039), total width 2 (0.079), total height 1.2 (0.047), and lead height 1.1 (0.043). The right view is a top-down view showing a circular body with a diameter of 1.35 (0.053), a lead diameter of 0.25 (0.010), and a lead thickness of 0.15 (0.006). The body has a radius of > R2.5 (0.098) and a surface plan. The lead has a surface plan and a height of 0.6 (0.024).</p>
MicroMELF
Units: mm (inch)

Applications

- Extremely fast switches

Absolute maximum ratings and general characteristics ($T_a = 25^\circ\text{C}$)					
Parameter	Test condition	Symbol	Value		Unit
			Min.	Max.	
Peak reverse voltage		V_{RM}	-	100	V
Reverse voltage		V_R	-	75	V
Repetitive peak forward current		I_{FRM}	-	450	mA
Average rectified forward current		$I_{F(AV)}$	-	200	mA
Non-repetitive peak forward surge current	$t=1.0\text{s}$	I_{FSM}	-	0.5	A
	$t=1.0\text{ms}$		-	1.0	
	$t=1.0\mu\text{s}$		-	4.0	
Power dissipation		P_{tot}	-	500	mW
Operating junction temperature		T_j	-	175	$^\circ\text{C}$
Storage temperature range		T_{STG}	-65	175	$^\circ\text{C}$
Forward voltage	$I_F=50\text{mA}$	V_F	-	1.0	V
Leakage current	$V_R=20\text{V}$	I_R	-	25	nA
	$V_R=75\text{V}$		-	5.0	μA
	$V_R=20\text{V}, T_j=150^\circ\text{C}$		-	50	μA
Capacitance	$V_R=0\text{V}, f=1.0\text{MHz}$	C_{tot}	-	4.0	pF
Voltage rise when switching ON	50mA forward pulses, $t_p=100\text{ms}, t_{rise}<30\text{ns},$ $f_p=5.0$ to 100kHz	V_{fr}	-	2.5	V
Reverse recovery time	$I_F=10\text{mA}$ to $I_R=1.0\text{mA}, I_{rr}=0.1I_R,$ $V_R=6.0\text{V}, R_L=100\Omega$	t_{rr}	-	4.0	ns
Rectification efficiency	$F=100\text{MHz}, V_{RF}=2.0\text{V}$	η_v	0.45	-	-

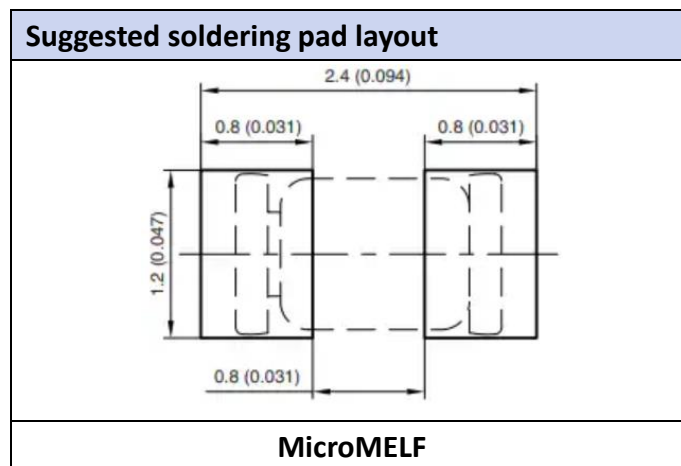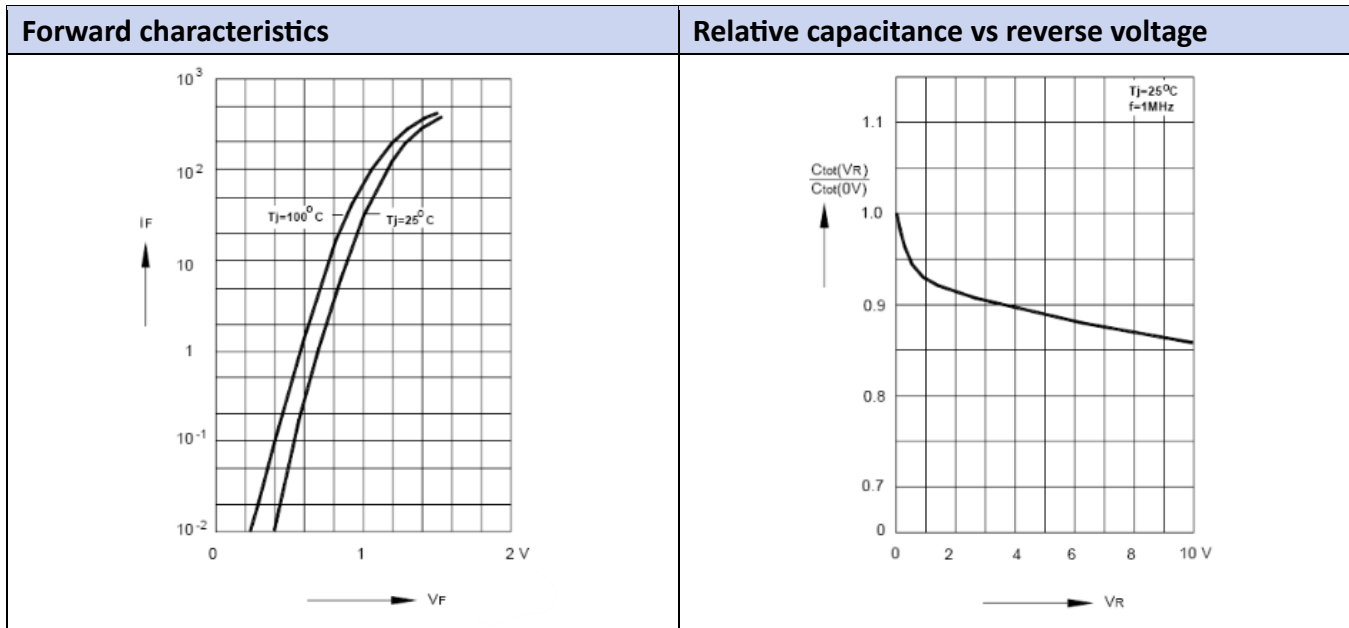

Ordering information			
Part Number	Package	Shipping Quantity	Dimensions
MCL4148	MicroMELF	2500 pcs / reel	---

Disclaimer

Akyga semi reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Akyga semi or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on Akyga semi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Akyga semi does not assume any liability arising out of the application or use of any product or circuit. Akyga semi products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Akyga semi. Customers using or selling Akyga semi components for use in such applications do so at their own risk and shall agree to fully indemnify Akyga semi and its subsidiaries harmless against all claims, damages and expenditures.