

Name: Battery Lithium-Ion Battery

Model: AKYGA INR18650-4S4P-100M

SPEC: 14.8V/10000mAh

Specification Modification Records

Modification Time	Descriptions	Issued Date	Approved By
	Release 1	2022-10-319	

Content

Any copies are invalid without our company's approval



1. Scope

This specification is applied to Lithium-ion rechargeable battery pack which is manufactured by Akyga


Reference standard


GB/T 18287-2013、IEC/EN61960、UL1642、GB/T31241-2014

2. Product Configuration

No.	Item Name	Specification		Remark
1	Li-ion Cell	18650-2500mAh	16	
2	PCM	S8254AAV+AO4407*4	1	
3	Connector	JST-SYP-02T-1	1	
4	Wire	Red wire UL3239-22AWG L150±5mm	1	
4	vviie	Black wire UL3239-22AWG L150±5mm	1	

3.Product Dimension



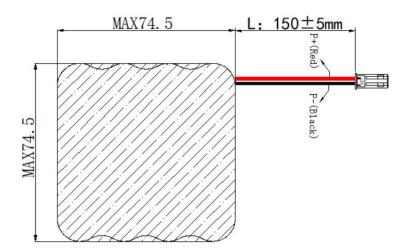



4.Product Specification

Table 1:

1:

No.	Item	Rated Perfo	ormance	Remark	
1	Rated Capacity	Typical Minimum	10Ah	Discharge at 0.2C₅A after standard charge fully.	
		Willilliam	9.8Ah		
2	Nominal Voltage	14.8V			
3	OCV	> 14.8V		Shipment voltage	
4	Voltage at end of Discharge	11V		Discharge cut-off voltage.	
5	Charging Voltage	16.8V±0.03	V		
6	AC (1KHz) Impedance New Cell Max.(mΩ)	≤250mΩ			
7	Standard Charge	Constant Current 0.2C ₅ A Constant Voltage 16.8V 0.02C ₅ A cut-off		Charge time: Approx 8.0h.	
8	Standard Discharge	Constant Current 0.2C₅A end voltage 11V			
9	Fast Charge	Constant Current 0.5C ₅ A Constant Voltage 16.8V 0.02C ₅ A cut-off		Charge time : Approx 4.0h.	
10	Fast Discharge	Constant Current 0.5C ₅ A end voltage 11V			
11	Maximum Continuous Charge Current	0.5C₅A			
12	Maximum Continuous Discharge Current	0.5C₅A			
13	Operation Temperature Range	Charge: 0~45°C		≤75% RH. Bare Cell.	
		Discharge: -20~60°C			



14	Storage Temperature Range	Less than 1 year: -5~30°C 1 : -5~30°C Less than 3 months: -5~45°C 3 : -5~45°C	- ≤75%RH.
15	Storage Humidity Range	≤75%RH.	
16	Weight	Approx:780g	
		Length: MAX:74.5mm	
17	Product Dimension	Width: MAX:74.5mm	
		Thickness: MAX:70.0mm	

5.Product Performance Test

5.1 Standard Testing Conditions

The test should be conducted with fresh battery within one week after shipment and the battery shall not be cycled more than five times. Unless otherwise defined, the test and measurement shall be done under temperature of $23\pm2^{\circ}$ C and relative humidity of $45\sim85\%$. Normally, the temperature and relative humidity will not affect the test results when they are at a range of temperature $15\sim30^{\circ}$ C and humidity $25\sim85\%$ RH.

5.2 Measuring Instrument or Apparatus

5.2.1 Dimension Measuring Instrument

The dimension measurement shall be implemented by instruments with equal or more precision scale of 0.01mm.

5.2.2 Volt meter

Standard class specified in the national standard or more sensitive class having inner impedance more than $10k\Omega/V$

5.2.3 Ammeter meter

Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and wire is less than 0.01Ω .

5.2.4 Impedance Meter

Impedance shall be measured by a sinusoidal alternating current method(1kHz LCR meter).



5.3 Standard Charge\Discharge

5.3.1 Standard Charge

CC-CV

Test procedure and its criteria are referred as follows:

 $0.2C_5A = 2A$

Charge with $0.2C_5A$ constant current until the battery reaches 16.8V. Then charge with voltage 16.8V until the charging current drops to $0.02C_5A$. The charge will be terminated and the battery shall be fully charged. Charge time is Approx 8.0h. The battery shall be with no permanent degradation when charged between 0 $^{\circ}$ C and 45 $^{\circ}$ C.

5.3.2 Standard Discharge

 $0.2C_5A = 2A$

Battery shall be discharged at a constant current of 0.2C₅A to 11V @ 23±2 °C.

5.4 Appearance

There shall be no such defects as flaw, crack, rust, leakage, which may adversely affect commercial value of battery.

5.5 Initial Performance Test

Table 2:

Item	Measuring Procedure	Requirements
(1) Open-Circuit Voltage	The open-circuit voltage shall be measured within 24 hours after standard charge.	≥16.4V
(2) AC Impedance Resistance	The Impedance shall be measured in an alternating current method (1kHz LCR meter) after standard charge at 23±2℃.	≤250mΩ
(3) Nominal Capacity	The capacity measured after standard discharge at 0.2C5A at 23±2 $^{\circ}\!$	Discharge Capacity ≥9.8Ah
(4) Retention Capability	After charge fully, store the battery for 28 days at 23±2°C, then store1 hours more, then discharge the battery at current of 0.2C till 11V cut-off voltage.	Capacity≥80%



5.6 Discharge capacity at different temperatures

Battery shall be charged per 5.3.1. and discharged @ $0.2C_5A$ to 11V at different temperatures, the discharge capacities are as shown in below Table 3. The battery shall be stored for 3 hours at the test temperature before test. Each battery shall meet or exceed the discharge capacities as shown in below Table 3.

Table 3:

Discharge Temperature	-10℃	0℃	23℃	60℃
Discharge Capacity (0.2 C ₅ A)	70%	80%	100%	95%

5.7 Cycle Life and Leakage-Proof


Table 4:

No.	Item	Criteria	Test Conditions
			Carry out 500 cycles charging/discharging:
		Higher than 70% of the	◆Charge: 0.5C₅A to 16.8V, 0.02C₅A cut-off
1	Cycle Life 1	Typical Capacities of the battery	◆Discharge: 0.5C₅A to 11V
			◆Rest Time between charge/discharge:30min.
			◆Temperature:23±2°C
2	Leakage-Proof	No leakage (visual inspection)	After fully charged, store at 60±3℃,60±10%RH for 1 month.



5.8 Mechanical Characteristics and Safety Test

Item	Battery Condition	Test Method	Requirements
Over charge test	Fresh battery, Fully Charged	Discharge : 0.5C₅A to 11V Charge : 3C₅A charge to 13.8V, and maintain for 7 hours.	No explosion No fire
Over discharge test	Fresh battery, Fully Charged	Discharge at constant current $0.5C_5A$ to 11V, then discharge at $0.2C_5A$ to 0V.	No explosion no fire, no smoke
Heat shock test	Fresh battery, Fully Charged	Put the battery in hot box ,then heat up to 130℃ in 1 minute, remain for 10 minutes.	No explosion No fire
Impact test	Fresh battery, Fully Charged	Impact between bar (15.8mm diameter) and 9.1Kg falling material (at a height of 6.1cm). Bar is laid across the center of the test sample.	No explosion No fire
Crush Test	Fresh battery, Fully Charged	Crush between two flat plates. Applied force is about 13kN(1.72Mpa) for 10min.	No explosion, No fire
Short Circuit test	Fresh battery, Fully Charged	Make short-circuited by connecting the (+) and (-) terminals of the battery with a copper wire having a maximum resistance load of 0.1Ω . Tests are to be conducted at room temperature (23±2°C).	No explosion, No fire. The surface of the battery shouldn't exceed 150 ℃
Rate test	Fresh battery, Fully Charged	0.2C/0.5C/1.0 charge & discharge.	
Low temperature discharge test	Fresh battery, Fully Charged	Put the battery at -20 $^{\circ}\mathrm{C}$ for 1h, then discharge at 0.2C $_5A$ to 11V.	Discharge capacity ≥45%



	100%	11V	
Store for 4 hours 85°C	Fresh battery, Fully Charged	Charge the battery fully in standard charging way at ambient temperature $(23\pm2^\circ\mathbb{C})$ and store for 1 hour. Then put it into the constant temperature and humidity oven at $85\pm2^\circ\mathbb{C}$ for 4 hours. Take it out and cool it for 2 hours at $(23\pm2^\circ\mathbb{C})$. And then test the thickness and capacity at $0.2C_5A$ when charge & discharge.	The rate of swelling ≤10% Remaining capacity ≥ 70% initial capacity. Recovery capacity ≥ 80% initial capacity
Vibration test	Fresh battery, Fully Charged	Vibrate the battery for 30 minutes per each three mutually perpendicular axis (X,Y,Z) after standard charge.	No rupture, no fire. No critical damage.
Drop test	Fresh battery, Fully Charged	Drop the battery from a height of 1m onto concrete board with 18~20mm thickness each one time from every direction after standard charge. Then discharge and charged at 1C 3 times, record the time of discharging.	No rupture, no fire No critical damage. Discharge time ≥51min



6. PCM Specification

6.1 Using scope: It applies to Li-ion Battery protection module for Akyga

6.2 Battery capacity:10Ah

6.3 Environment request: RoHS.

6.4 Function description: Over charge protection, Over discharge protection, Over current protection,

Short circuit protection

6.5 Electrical features:

project	Parameter value				
project	General temperature: 25℃				
Item	Min.	Type value	Max.	Unit	
Over charge protection voltage	4.215	4.250	4.285	V	
Over charge release voltage	4.050	4.150	4.250	V	
Over discharge protection voltage	2.600	2.700	2.800	V	
Over discharge release voltage	2.900	3.000	3.100	V	
Over current detection voltage	0.175	0.200	0.225	V	
Over current protection current	15		25	Α	
Over charge protection delay time	500	1000	1500	ms	
Over discharge protection delay time	50	100	150	ms	
Over current protection delay time	5	10	15	ms	
Short protection delay time	100	300	500	us	
Current consumption (Operation)	4.0	15.0	55.0	uA	
Current consumption (Power down)			3.0	uA	
Impedance			50	mΩ	
Input voltage (B+ to B-)	-0.3		18	V	
Operating temperature	-20		+85	$^{\circ}$	
Recommendatory storage condition	Temperature	range: -5∼+35℃ 75%RF		y: 0%~	
0V battery charge function		Availabl	e		




6.6 Reliability test

6.6.1 Humidity test: +40±2°C, 90%RH, 48h.


6.6.2 High temp. test: +85±2°C, 2h.

6.6.4 ESD test: All parts work normally at \pm 4KV (contact) \pm 8KV (air).

6.7 Top overlay

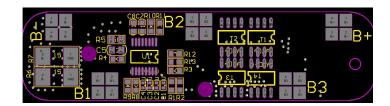

6.8 Circuit diagram:

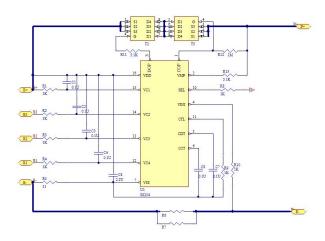

6.9 Parts list:

Item	Part	Description	QTY	Footprint	Supplier	Remark
	Name					备
1	IC	S8254AAV	1pcs	TSSOT-16	ICM	
2	MOS	A04407	4pcs	TO-263	DP	
3	R	7mR	1pcs	2512	Any approved vendor	
4	PCB		1pcs		Any approved vendor	



7. Storage and Transportation

7.1 Storage:

- 7.1.1 The Li-ion battery pack should be stored in a cool, dry and well-ventilated area and should be kept far away from the fire and high temperature.
- 7.1.2 The best capacity for storage is 30%-50%.
- 7.1.3 The battery should be stored in the temperature range as stated in this specification sheet. The best storage temperature is 0 to 25 °C. The best humidity is 60±25%.
- 7.1.4 If store the battery six months or longer, suggest carry on additional charge to the battery.

7.2 Transportation:

- 7.2.1 Do not mix the battery products with other cargoes.
- 7.2.2 Do not immerse the battery products in water or get it wet.
- 7.2.3 Do not do over 7 layer- staking and upside-down.
- 7.2.4 The highest temperature in transportation is lower than 65℃.

8. Battery Precautions and Safety Instructions:

To ensure proper use of the battery please read the instructions carefully before using it.

8.1 Handling:

- 8.1.1 Do not expose or dispose the battery in fire.
- 8.1.2 Do not put the battery in a charger or equipment with wrong terminals connected.
- 8.1.3 Avoid battery short circuit.
- 8.1.4 Avoid excessive physical shock or vibration.
- 8.1.5 Do not disassemble or deform the battery.
- 8.1.6 Do not immerse in water.
- 8.1.7 Do not use the battery mixed with other brand, type or model.
- 8.1.8 Keep out of the reach of children.



8.2 Charge:

- 8.2.1 Battery must be charged in appropriate charger only.
- 8.2.2 Never use a modified or damaged charger.
- 8.2.3 Do not leave battery in charger over 24 hours.
- 8.2.4 Charging current: Don't surpass the highest charge current as stated in this specification sheet.
- 8.2.5 Charging voltage: Don't surpass the highest charge voltage as stated in this specification sheet.
- 8.2.6 Charge temperature: The battery must be charged in the ambient temperature range as stated in this specification sheet.
- 8.2.7 Charge the battery via constant current first and then via constant voltage, no reverse charge. If the positive electrode and the cathode mixed, the battery can be damaged.
- 8.2.8 Store the battery after it's charged. The battery should be recharged/re-discharged every 3 months.

8.3 Discharge:

- 8.3.1 The discharge current shouldn't surpass the highest discharge current as stated in this specification sheet. If surpass, the battery may be damaged and it can result in hot battery which is risk.
- 8.3.2 Discharge temperature range: The discharge must be done in the ambient temperature range as stated in this specification sheet.
- 8.3.3 Over-discharge: A short-time over-discharge will not affect the use of the battery, but long-time will do. If the battery is not used for a long time, the performance will get poorer. It should be recharged and re-discharged fully several times before it's recovered.

8.4 Disposal:


Regulation is vary in different countries. Please dispose wasted battery according to local regulations.

9. Period of Warranty

There is a twelve-month warranty of the batteries from the date of shipment. If there is quality problem within, we are responsible to replace the defective ones according to the accurate analysis results. However, we won't take any responsibility if the problem is caused by the battery-related

applications and related products.

10. Package

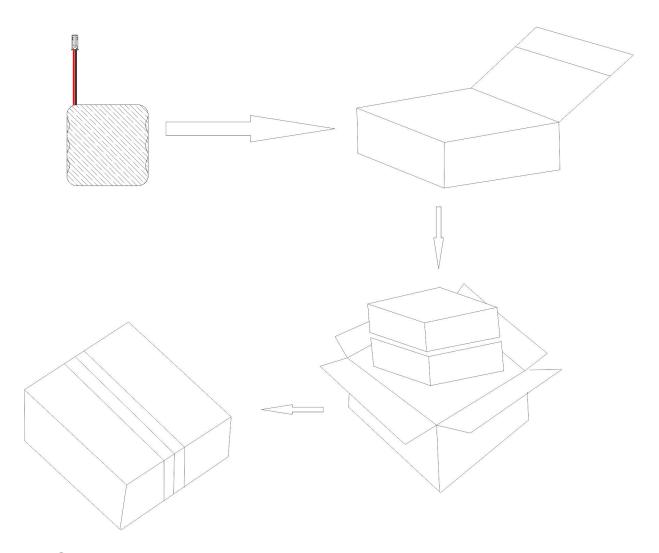

11. Others

Battery is chemical product, the performance will be deteriorated when it's used for a long time or it's stored for a long time without being used. In addition, if it's not charged or discharged properly as stated in this specification sheet, the capacity and lifespan will be shortened, or the product which the battery applied to will be damaged by its leaking. If the battery is charged properly but can't be charged fully, please replace it in time.