

# ER26500M

#### **ELECTRICAL CHARACTERISTIC**

Nominal Capacity	6.4Ah
(/	At 1.0Ma, +25°C 2.0V cut off.
The capacity restored by the cell varies to current drain, temperature and cut-off)	
Rated Voltage	3.6V
Max. Recommended Continuous Current	1500mA
Max. Pulse Current Capability	2500mA
Storage (recommended)	Max. 30°C



 Operating Temp. Range
 -60°C to +85°C

 (Operating closely to limit temp. may lead to a reduced capacity, low voltage plateau reading)

 Typical Weight
 55g

## **Key features**

- High and stable operating voltage
- Low self-discharge rate

(less than 1% after 1-year storage at 25°C)

- Stainless steel container
- Hermetic sealing
- Non-flammable electrolyte
- Spiral type
- CE, SGS recognized

### ISO9001 approved

#### WARNINGS!


- 1. Fire, explosion and severe burn hazard;
- 2. Do not recharge, crush, disassemble, heat above 100°C;
- 3. Do not solder directly to the cell.


# **Main application**

- Utility Metering
- Memory Back-up
- Alarms & Security Devices
- Automotive electronics
- Tollgate systems
- Military electronics
- Automatic meter reading
- Professional electronics



## LOADING VOLT. @ROOM TEMP.

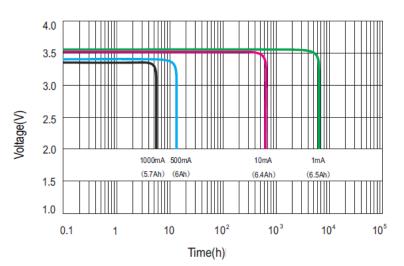



VOLT. vs. TEMPERATURE

