

Li-ion Cylindrical Battery Cell Specification

INR21700-5000mAh 3.7V



1. Scope

This specification is applied to Lithium-ion rechargeable battery pack which is manufactured by Akyga Battery


Reference standard

GB/T 18287-2013、IEC/EN61960、UL1642、GB 31241-2014

2. Product Configuration 产

| No. | Item Name | Specification | | Qty | Remark |
|--------|-------------|---------------|-----------------------|-----|--------|
| 1 | Li-ion Cell | INR21700-5 | 000mAh 3.7V | 1 | ROHS |
| 2 | PCM | DW01+8205 | *2 | 1 | ROHS |
| 3 | Connector | JST-PH-2P | | 1 | ROHS |
| 4 Miro | | Red wire | UL1007-22AWG L100±3mm | 1 | ROHS |
| 4 | Wire | Black wir | UL1007-22AWG L100±3mm | 1 | ROHS |

2. Product Dimension

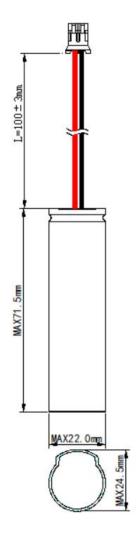



4.Product Specification

Table 1:

| No | Item | Rated Performance | | Remark | |
|----|---------------------------------------|--|---------|--|--|
| | Rated Capacity | Typical | 5000mAh | Discharge at 0.2C ₅ A after | |
| 1 | | Minimum 4900mAh | | standard charge fully. | |
| 2 | Nominal Voltage | 3.7V | | | |
| 3 | OCV | > 3.5V | | Shipment voltage | |
| 4 | Voltage at end of Discharge | 2.5V | | Discharge cut-off voltage. | |
| 5 | Charging Voltage | 4.20±0.03V | , | | |
| 6 | AC (1KHz) Impedance New Cell Max.(mΩ) | ≤150mΩ | | | |
| 7 | Standard Charge | Constant Current 0.2C ₅ A Constant Voltage 4.20V 0.02C ₅ A cut-off | | Charge time: Approx 8.0h. | |
| 8 | Standard Discharge | Constant Current 0.2C ₅ A end voltage 2.5V | | | |
| 9 | Fast Charge | Constant Current 0.5C ₅ A Constant Voltage 4.20V 0.02C ₅ A cut-off | | Charge time : Approx 4.0h. | |
| 10 | Fast Discharge | Constant Current 0.5C ₅ A end voltage 2.5V | | | |
| 11 | Maximum Continuous Charge Current | 3.0A | | | |
| 12 | Maximum Continuous Discharge Current | 3.0A | | | |
| 4- | Operation Temperature | Charge: 0~45°C | | | |
| 13 | Range | Discharge: -10~60°C | | 60±25% RH. Bare Cell. | |



| 14 | Storage Temperature Range | Less than 1 year: -10~25°C Less than 3 months: -10~40°C | 60±25%RH. |
|----|------------------------------|--|-----------|
| 15 | Storage Humidity Range | 60±25%RH. | |
| 16 | Weight | Approx:75.0g | |
| | | Length: Max 71.5mm | |
| 17 | Product Dimension | Width: Max 24.5mm | |
| | | Thickness: Max22.0mm | |

5.Product Performance Test

5.1 Standard Testing Conditions

The test should be conducted with fresh battery within one week after shipment and the battery shall not be cycled more than five times. Unless otherwise defined, the test and measurement shall be done under temperature of $23\pm2^{\circ}$ C and relative humidity of $45\sim85\%$. Normally, the temperature and relative humidity will not affect the test results when they are at a range of temperature $15\sim30^{\circ}$ C and humidity $25\sim85\%$ RH.

5.2 Measuring Instrument or Apparatus

5.2.1 Dimension Measuring Instrument

The dimension measurement shall be implemented by instruments with equal or more precision scale of 0.01mm.

5.2.2 Volt meter

Standard class specified in the national standard or more sensitive class having inner impedance more than $10k\Omega/V$

5.2.3 Ammeter meter

Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and wire is less than 0.01Ω .

5.2.4 Impedance Meter

Impedance shall be measured by a sinusoidal alternating current method(1kHz LCR meter).



5.3 Standard Charge\Discharge

5.3.1 Standard Charge

CC-CV

Test procedure and its criteria are referred as follows:

$0.2C_5A = 1000 \text{mAh}$

Charge with $0.2C_5A$ constant current until the battery reaches 4.20V. Then charge with voltage 4.20V until the charging current drops to $0.02C_5A$. The charge will be terminated and the battery shall be fully charged. Charge time is Approx 8.0h. The battery shall be with no permanent degradation when charged between 0 $^{\circ}C$ and 45 $^{\circ}C$.

5.3.2 Standard Discharge

0.2C₅A =1000mA

Battery shall be discharged at a constant current of 0.2C₅A to 2.5V @ 23±2 °C.

5.4 Appearance

There shall be no such defects as flaw, crack, rust, leakage, which may adversely affect commercial value of battery.

5.5 Initial Performance Test

Table 2:

| Item | Measuring Procedure | Requirements |
|--------------------------------|--|-----------------------------------|
| (1) Open-Circuit Voltage | The open-circuit voltage shall be measured within 24 hours after standard charge | ≥4.08V |
| (2) AC Impedance Resistance | The Impedance shall be measured in an alternating current method (1kHz LCR meter) after standard charge at 23±2℃. | ≤150mΩ |
| (3) Nominal Capacity | The capacity measured after standard discharge at $0.2C_5A$ at $23\pm2^{\circ}\!$ | Discharge Capacity ≥5000mAh |
| (4) Retention Capability | After charge fully, store the battery for 28 days at 23±2°C, then store1 hours more, then discharge the battery at current of 0.2C ₅ A till 2.5V cut-off voltage. | Capacity≥80% |



5.6 Discharge capacity at different temperatures

Battery shall be charged per 5.3.1. and discharged @0.2C₅A to 3.0 volts at different temperatures, the discharge capacities are as shown in below Table 3. The battery shall be stored for 3 hours at the test temperature before test. Each battery shall meet or exceed the discharge capacities as shown in below Table 3.

Table 3:

| Discharge Temperature | -10°C | 0°C | 23 ℃ | 60°C |
|--|-------|-----|-------------|------|
| Discharge Capacity (0.2C ₅ A) | 70% | 80% | 100% | 95% |

5.7 Cycle Life and Leakage-Proof

Table 4:

| No. | Item | Criteria | Test Conditions |
|-----|---------------|--|--|
| 1 | Cycle Life | Higher than 70% of the Typical Capacities of the battery | Carry out 500 cycles charging/discharging: ◆ Charge: Standard Charge, per 5.3.1 ◆ Discharge: 0.5C₅A to 2.5V ◆ Rest Time between charge/discharge:30min. ◆ Temperature:23±2°C |
| 2 | Leakage-Proof | No leakage (visual inspection) | After fully charged, store at 60±3℃,60±10%RH for 1 month. |



5.8 Mechanical Characteristics and Safety Test

| Item | Battery Condition | Test Method | Requirements |
|---------------------|------------------------------------|--|--|
| Over charge test | Fresh battery, Fully Charged | Discharge : $1.0 C_5 A$ to $2.5 V$ Charge : $3.0 C_5 A$ charge to $4.6 V$, and maintain for 7 hours. | No explosion No fire |
| Over discharge test | Fresh battery, Fully Charged | Discharge at constant current 0.2 C ₅ A to 0V, | No explosion no fire, no smoke |
| Heat shock test | Fresh battery, Fully Charged | Put the battery in hot box ,then heat up to 130°C in 1 minute, remain for 10 minutes. | No explosion No fire |
| Impact test | Fresh battery, Fully Charged | Impact between bar (15.8mm diameter) and 9.1Kg falling material (at a height of 6.1cm). Bar is laid across the center of the test sample. | No explosion No fire |
| Crush Test | Fresh battery, Fully Charged | Crush between two flat plates. Applied force is about 13kN(1.72Mpa) for 10min. | No explosion, No fire |
| Short Circuit test | Fresh battery, Fully Charged | Make short-circuited by connecting the (+) and (-) terminals of the battery with a copper wire having a maximum resistance load of 0.1Ω . Tests are to be conducted at room temperature (20±2°C). | No explosion, No fire. The surface of the battery shouldn't exceed 150°C |
| Rate test | Fresh battery, Fully Charged | 0.2C/0.5C/1.0C charge & discharge. | |



| Low temperature discharge test | Fresh battery, Fully Charged | Put the battery at -10 $^{\circ}\mathrm{C}$ for 1h, then discharge at 0.2C $_{5}A$ to 2.5V. | Discharge capacity ≥70% |
|--------------------------------------|---------------------------------|--|---|
| Store for 4 hours 85°C 85°C | Fresh battery, Fully Charged | Charge the battery fully in standard charging way at ambient temperature $(23 \pm 2^{\circ}\text{C})$ and store for 1 hour. Then put it into the constant temperature and humidity oven at $85\pm2^{\circ}\text{C}$ for 4 hours. Take it out and cool it for 2 hours at $(23\pm2^{\circ}\text{C})$. And then test the thickness and capacity at 0.2C5A when charge & discharge. | The rate of swelling ≤10% Remaining capacity ≥ 70% initial capacity. Recovery capacity ≥ 80% initial capacity |
| Vibration test | Fresh battery, Fully Charged | Vibrate the battery for 30 minutes per each three mutually perpendicular axis (X,Y,Z) after standard charge. | No rupture, no fire. No critical damage. |
| Drop test | Fresh battery, Fully Charged | Drop the battery from a height of 1m onto concrete board with 18~20mm thickness each one time from every direction after standard charge. Then discharge and charged at 1C 3 times, record the time of discharging. | No rupture, no fire No critical damage. Discharge time ≥51min |



6. PCM Specification

6.1 Using scope: It applies to Li-ion Battery protection module for Akyga Battery

6.2 Battery capacity: 5000mAh

6.3 Environment request: RoHS.

6.4 Function description: Over charge protection, Over discharge protection, Over current protection,

Short circuit protection

6.5 Electrical features:

| project | Parameter value | | | | | |
|--------------------------------------|---|------------|------|------------|--|--|
| project | General temperature: 25℃ | | | | | |
| Item | Min. | Type value | Max. | Unit | | |
| Over charge protection voltage | 4.23 | 4.28 | 4.33 | V | | |
| Over charge release voltage | 4.05 | 4.10 | 4.15 | V | | |
| Over discharge protection voltage | 2.30 | 2.40 | 2.50 | V | | |
| Over discharge release voltage | 2.90 | 3.00 | 3.10 | V | | |
| Over current detection voltage | 0.12 | 0.15 | 0.18 | V | | |
| Over current protection current | 4 | | 10 | Α | | |
| Over charge protection delay time | 80 | 140 | 200 | ms | | |
| Over discharge protection delay time | 40 | 60 | 100 | ms | | |
| Over current protection delay time | 10 | 15 | 20 | ms | | |
| Short protection delay time | 5 | 30 | 50 | us | | |
| Current consumption (Operation) | 4.0 | 5.0 | 8.0 | uA | | |
| Current consumption (Power down) | | | 0.1 | uA | | |
| Impedance | | | 50 | mΩ | | |
| Input voltage (B+ to B-) | -0.3 | | 12 | V | | |
| Operating temperature | -20 | | +85 | $^{\circ}$ | | |
| Re commendatory storage condition | Temperature range: -5∼+35℃ Humidity: 0%∼75%RH | | | | | |
| 0V battery charge function | | Availabl | e | | | |



6.6 Reliability test


6.6.1 Humidity test: +40±2 $^{\circ}$ C, 90%RH, 48h.

6.6.2 High temp. test: +85±2℃, 2h.


6.6.3 Low temp. test: -20±2°C, 16h

6.6.4 ESD test: All parts work normally at ± 4KV (contact) ± 8KV (air).

6.7 Top overlay

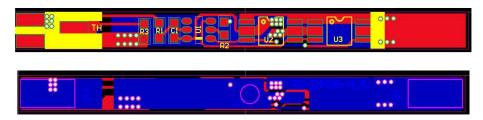

6.8 Circuit diagram:



6.9 Parts list:

| Item | Part | Description | QTY | Footprint | Supplier | Remark |
|------|------|-------------|------|-----------|---------------------|--------|
| | | | | | | |
| 1 | U1 | DW01 | 1pcs | SOT-23-6 | DP | |
| 2 | U2 | 8205 | 2pcs | TSSOP-8 | DP | |
| 3 | C1 | 0.1µF | 1pcs | 0603 | Any approved vendor | |
| 4 | R1 | 100Ω±5% | 1pcs | 0603 | Any approved vendor | |
| 5 | R2 | 1.0KΩ±5% | 1pcs | 0603 | Any approved vendor | |
| 7 | PCB | | 1pcs | | Any approved vendor | |

akyga

Specification Approval sheet

7. Storage and Transportation

7.1 Storage:

- 7.1.1 The Li-ion battery pack should be stored in a cool, dry and well-ventilated area and should be kept far away from the fire and high temperature.
- 7.1.2 The best capacity for storage is 30%-50%.
- 7.1.3 The battery should be stored in the temperature range as stated in this specification sheet. The best storage temperature is 0 to 25 °C. The best humidity is 60±25%.
- 7.1.4 If store the battery six months or longer, suggest carry on additional charge to the battery.

7.2 Transportation:

- 7.2.1 Do not mix the battery products with other cargoes.
- 7.2.2 Do not immerse the battery products in water or get it wet.
- 7.2.3 Do not do over 7 layer- staking and upside-down.
- 7.2.4 The highest temperature in transportation is lower than 65℃.

8. Battery Precautions and Safety Instructions:

To ensure proper use of the battery please read the instructions carefully before using it.

8.1 Handling:

- 8.1.1 Do not expose or dispose the battery in fire.
- 8.1.2 Do not put the battery in a charger or equipment with wrong terminals connected.
- 8.1.3 Avoid battery short circuit.
- 8.1.4 Avoid excessive physical shock or vibration.
- 8.1.5 Do not disassemble or deform the battery.



- 8.1.6 Do not immerse in water.
- 8.1.7 Do not use the battery mixed with other brand, type or model.
- 8.1.8 Keep out of the reach of children.

8.2 Charge:

- 8.2.1 Battery must be charged in appropriate charger only.
- 8.2.2 Never use a modified or damaged charger.
- 8.2 3 Do not leave battery in charger over 24 hours.
- 8.2.4 Charging current: Don't surpass the highest charge current as stated in this specification sheet.
- 8.2.5 Charging voltage: Don't surpass the highest charge voltage as stated in this specification sheet.
- 8.2.6 Charge temperature: The battery must be charged in the ambient temperature range as stated in this specification sheet.
- 8.2.7 Charge the battery via constant current first and then via constant voltage, no reverse charge. If the positive electrode and the cathode mixed, the battery can be damaged.
- 8.2.8 Store the battery after it's charged. The battery should be recharged/re-discharged every 3 months.

8.3 Discharge:

- 8.3.1 The discharge current shouldn't surpass the highest discharge current as stated in this specification sheet. If surpass, the battery may be damaged and it can result in hot battery which is risk.
- 8.3.2 Discharge temperature range: The discharge must be done in the ambient temperature range as stated in this specification sheet.
- 8.3.3 Over-discharge: A short-time over-discharge will not affect the use of the battery, but long-time will do. If the battery is not used for a long time, the performance will get poorer. It should be recharged and re-discharged fully several times before it's recovered.


8.4 Disposal:

Regulation is vary in different countries. Please dispose wasted battery according to local regulations.

9. Period of Warranty

There is a twelve-month warranty of the batteries from the date of shipment. If there is quality problem within, we are responsible to replace the defective ones according to the accurate analysis results. However, we won't take any responsibility if the problem is caused by the battery-related applications and related products.

10. Package

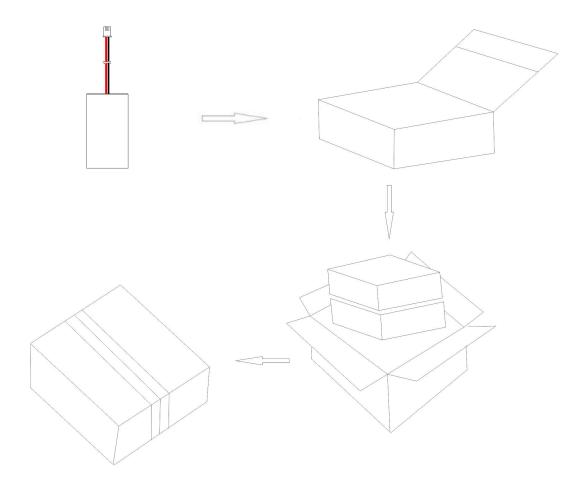



11. Others

Battery is chemical product, the performance will be deteriorated when it's used for a long time or it's stored for a long time without being used. In addition, if it's not charged or discharged properly as stated in this specification sheet, the capacity and lifespan will be shortened, or the product which the battery applied to will be damaged by its leaking. If the battery is charged properly but can't be charged fully, please replace it in time.

12. Special Request

If you need isn't fulfilled by this specification, we can custom design per you request. Just write down your request, we're more than happy to serve you. Thank you.

| | Special Request | Criteria |
|---|-----------------|----------|
| | | |
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |