


Huawei P/N: KP2V332MZ10BC68CE0G3	CHANGZHOU HUAWEI ELECTRONICS CO.,LTD KP 350V 3300 μ F 45*105	Page:1/1
-------------------------------------	--	----------

Customer : Ropla Elektronik Sp. z o.o.
Customer P/N :

Diagram Of Dimensions

unit: mm

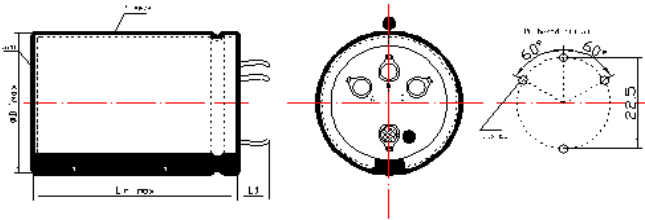

D	45	L	105
βMax	+1.0	αMax	+2.0
L1±1.0	5.8		

β 为 D 值公差 / α 为 L 值公差

Items	Performance					
Operating Temperature Range	-40°C ~ +85°C					
Capacitance Tolerance	-20% ~ +20% (120Hz,20°C)					
Surge Voltage	400VDC					
Leakage Current	LC ≤ 3224μA After 5 minutes					
Dissipation Factor (Tan δ)	≤ 0.20 (120Hz,20°C)					
ESR	(, 25°C)					
Ripple Currents	8.14A (100Hz, +85°C)					
Low Temperature Characteristics(120Hz)	Z-25°C / Z+20°C			8		
	Z-40°C / Z+20°C			12		
Ripple Current & Frequency Multipliers	Frequency(Hz)	50	120	1K	10K	≥50K
	Coefficient	0.80	1.00	1.30	1.41	1.43
Life Test: Load Life Test: After 18000 Hrs at 85°C Shelf Life Test: After 1000 Hrs at 85°C	Capacitance Change	Load Life: Within ±30% of initial value				
		Shelf Life: Within ±15% of initial value				
	Dissipation Factor	Load Life: Less than 300% of specified value				
		Shelf Life: Less than 150% of specified value				
Leakage current	Load Life: Within specified value					
	Shelf Life: Within specified value					
Solder ability	Dip of wave soldering capacitors should be less than 260±5°C, 10±1seconds					
Standards	IEC-60384					
Remarks	RoHS Compliance & Halogen-Free					

Publish Date	15-Dec-2022	Approval Signatures:	Approved	Checked	Designed
Revise Date					
Edition No.	1		Please return one copy with your approval		