

BZV55-C2V2 SERIES

Zener Diodes	VOLTAGE - 2.2 to 100 Volts POWER - 500 mWatts
FEATURES Planar Die Construction 500mW Power Dissipation Ideally Suited for Automated Assembly Processes In Compliance With EU RoHS 2002/95/EC Directives	DL-35
 MECHANICAL DATA Case: Molded Glass MINI-MELF Terminals: Solderable per MIL-STD-750, Method 2026 Polarity: See Diagram Below Approx. Weight: 0.03 grams Mounting Position: Any Packing Information T/R-2.5K per 7" plastic Reel T/R-10K per 13" plastic Reel Note: Products with logo or by are made by HY Electronic (Cayman) Limited. 	<u>.020(0.5)</u> .012(0.3) <u>.146(3.7)</u> .130(3.3)

		Unit :inch(mm)			
MAXIMUM RATINGS AND ELECTRIC	CAL CHARACTE	RISTICS			
Parameter	Symbol		Value		U
Power Dissipaiton at Tamb = 25° C	Ртот		500		n
Junction Temperature	TJ	175			
Storage Temperature Range	Ts	-65 to +175			
Vaild provided that leads at a distance of 8mm from case	are kept at ambient tem	perature.			
Parameter	Symbol	Min	Тур	Max	Units

Reja

 VF

Vaild provided that leads at a distance of 8 mm from case are kept at ambient temperature.

Thermal Resistance Junciton to Ambient Air

Forward Voltage at IF=200mA

BZV55C*-7-99-00/01 Rev. 2, 02-Jun-2020

Units mW °C °C

K/mW

V

0.3

1.5

BZV55-C2V2 SERIES



Part Number	Nom	Nominal Zener Voltage			Max.Zener Impedance			Max Reverse Leakage Current		marking
		Vz @ Izt		Zzt	@ Izt	Zzк @ Izк		Ir (D Vr	code
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V	1
BZV55-C2V2	2.20	2.09	2.31	85	5.0	600	1.00	50	1.0	C2V2
BZV55-C2V4	2.40	2.28	2.56	85	5.0	600	1.00	50	1.0	C2V4
BZV55-C2V7	2.70	2.50	2.90	85	5.0	600	1.00	10	1.0	C2V7
BZV55-C3V0	3.00	2.80	3.20	85	5.0	600	1.00	4	1.0	C3V0
BZV55-C3V3	3.30	3.10	3.50	85	5.0	600	1.00	2	1.0	C3V3
BZV55-C3V6	3.60	3.40	3.80	85	5.0	600	1.00	2	1.0	C3V6
BZV55-C3V9	3.90	3.70	4.10	85	5.0	600	1.00	2	1.0	C3V9
BZV55-C4V3	4.30	4.00	4.60	75	5.0	600	1.00	1	1.0	C4V3
BZV55-C4V7	4.70	4.40	5.00	60	5.0	600	1.00	0.5	1.0	C4V7
BZV55-C5V1	5.10	4.80	5.40	35	5.0	550	1.00	0.1	1.0	C5V1
BZV55-C5V6	5.60	5.20	6.00	25	5.0	450	1.00	0.1	1.0	C5V6
BZV55-C6V2	6.20	5.80	6.60	10	5.0	200	1.00	0.1	2.0	C6V2
BZV55-C6V8	6.80	6.40	7.20	8	5.0	150	1.00	0.1	3.0	C6V8
BZV55-C7V5	7.50	7.00	7.90	7	5.0	50	1.00	0.1	5.0	C7V5
BZV55-C8V2	8.20	7.70	8.70	7	5.0	50	1.00	0.1	6.0	C8V2
BZV55-C9V1	9.10	8.50	9.60	10	5.0	50	1.00	0.1	7.0	C9V1
BZV55-C10	10.00	9.40	10.60	15	5.0	70	1.00	0.1	7.5	C10V
BZV55-C11	11.00	10.40	11.60	20	5.0	70	1.00	0.1	8.5	C11V
BZV55-C12	12.00	11.40	12.70	20	5.0	90	1.00	0.1	9.0	C12V
BZV55-C13	13.00	12.40	14.10	26	5.0	110	1.00	0.1	10.0	C13V
BZV55-C15	15.00	13.80	15.60	30	5.0	110	1.00	0.1	11.0	C15V
BZV55-C16	16.00	15.30	17.10	40	5.0	170	1.00	0.1	12.0	C16V
BZV55-C18	18.00	16.80	19.10	50	5.0	170	1.00	0.1	14.0	C18V
BZV55-C20	20.00	18.80	21.20	55	5.0	220	1.00	0.1	15.0	C20V
BZV55-C22	22.00	20.80	23.30	55	5.0	220	1.00	0.1	17.0	C22V
BZV55-C24	24.00	22.80	25.60	80	5.0	220	1.00	0.1	18.0	C24V
BZV55-C27	27.00	25.10	28.90	80	5.0	220	1.00	0.1	20.0	C27V
BZV55-C30	30.00	28.00	32.00	80	5.0	220	1.00	0.1	22.0	C30V
BZV55-C33	33.00	31.00	35.00	80	5.0	220	1.00	0.1	24.0	C33V
BZV55-C36	36.00	34.00	38.00	80	5.0	220	1.00	0.1	27.0	C36V
BZV55-C39	39.00	37.00	41.00	90	2.5	500	1.00	0.1	30.0	C39V
BZV55-C43	43.00	40.00	46.00	90	2.5	600	1.00	0.1	33.0	C43V
BZV55-C47	47.00	44.00	50.00	110	2.5	700	1.00	0.1	36.0	C47V
BZV55-C51	51.00	48.00	54.00	125	2.5	700	0.50	0.1	39.0	C51V
BZV55-C56	56.00	52.00	60.00	135	2.5	1000	0.50	0.1	43.0	C56V
BZV55-C62	62.00	58.00	66.00	150	2.5	1000	0.50	0.1	47.0	C62V
BZV55-C68	68.00	64.00	72.00	200	2.5	1000	0.50	0.1	51.0	C68V
BZV55-C75	75.00	70.00	79.00	250	2.5	1500	0.50	0.1	56.0	C75V
BZV55-C82	82.00	77.00	87.00	300	2.5	2000	0.50	0.1	62.0	C82V
BZV55-C100	100.00	94.00	106.00	450	1.0	5000	0.10	0.1	75.0	C100V

Notes:


STANDARD VOLTAGE TOLERANCE IS $\pm 5\%$ AND: SUFFIX "A" FOR $\pm\,1\%$

SUFFIX "B" FOR ±2%

SUFFIX "C" FOR ±5%

SUFFIX "D" FOR ±20%

RATING AND CHARACTERTIC CURVES BZV55-C2V2 SERIES

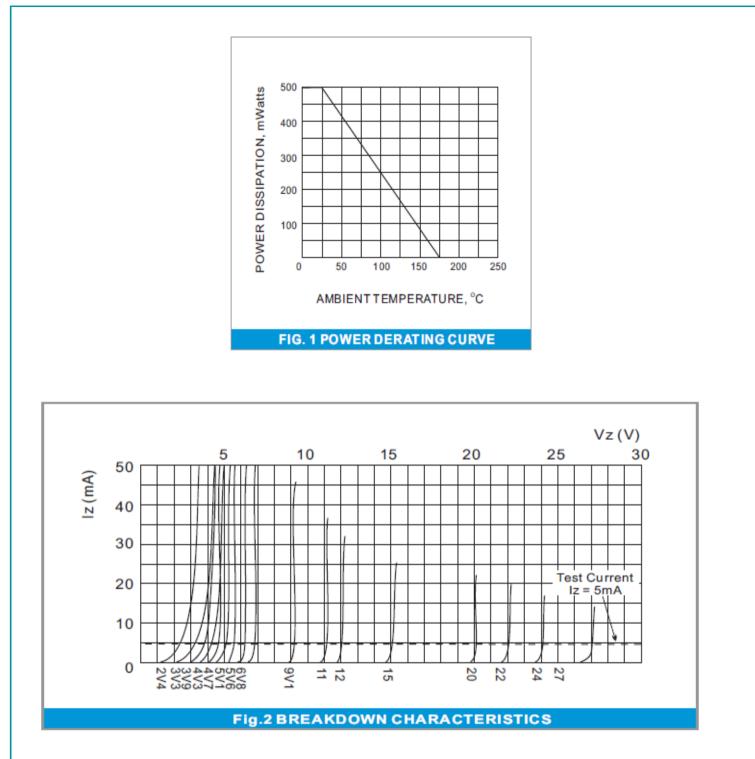



Disclaimer

ALL specifications and data are subject to be changed without notice to improve reliability function or design or other reasons.

HY makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the cotinuing production of any product. To the maximum extent permitted by applicable law, HY disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on HY's knowledge of typical requirements that are often placed on HY products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.Parameters provided in datasheets and specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify HY's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, HY products are not designed for use in medical, life-saving, or life-sustaining applications or for any other applications in which the failure of the HY product could result in personal injury or death. Customers using or selling HY products not expressly indicated for use in such applications do so at their own risk.Please contact authorized HY personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of HY. Product names and markings noted herein may be trademarks of their respective owners.