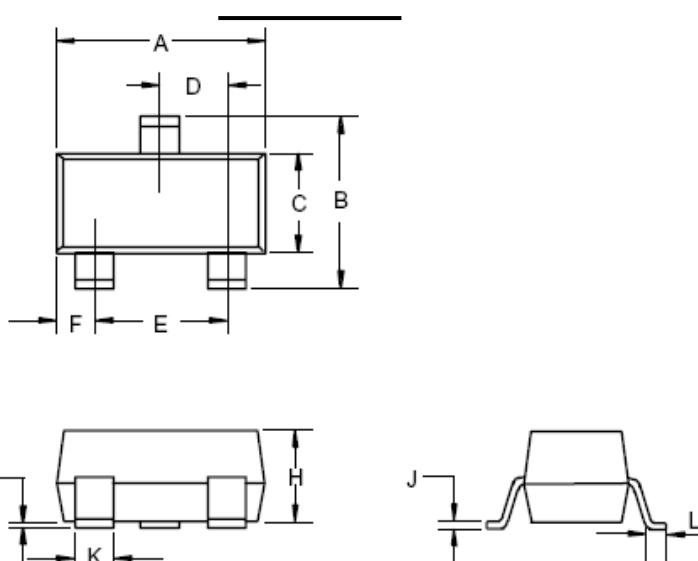


SILICON ZENER DIODE	POWER 350mW																																																																												
<b>FEATURES</b> <ul style="list-style-type: none"> <li>● Planar Die construction</li> <li>● 350mW Power Dissipation</li> <li>● Zener Voltages from 2.4V - 51V</li> <li>● Ideally Suited for Automated Assembly Processes</li> </ul>	<p style="text-align: center;"><b>SOT-23</b></p>  <p style="text-align: center;"><b>DIMENSIONS</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">DIM</th> <th colspan="2">INCHES</th> <th colspan="2">MM</th> <th rowspan="2">NOTE</th> </tr> <tr> <th>MIN</th> <th>MAX</th> <th>MIN</th> <th>MAX</th> </tr> </thead> <tbody> <tr> <td>A</td><td>.110</td><td>.120</td><td>2.80</td><td>3.04</td><td></td></tr> <tr> <td>B</td><td>.083</td><td>.104</td><td>2.10</td><td>2.64</td><td></td></tr> <tr> <td>C</td><td>.047</td><td>.055</td><td>1.20</td><td>1.40</td><td></td></tr> <tr> <td>D</td><td>.035</td><td>.041</td><td>.89</td><td>1.03</td><td></td></tr> <tr> <td>E</td><td>.070</td><td>.081</td><td>1.78</td><td>2.05</td><td></td></tr> <tr> <td>F</td><td>.018</td><td>.024</td><td>.45</td><td>.60</td><td></td></tr> <tr> <td>G</td><td>.0005</td><td>.0039</td><td>.013</td><td>.100</td><td></td></tr> <tr> <td>H</td><td>.035</td><td>.044</td><td>.89</td><td>1.12</td><td></td></tr> <tr> <td>J</td><td>.003</td><td>.007</td><td>.085</td><td>.180</td><td></td></tr> <tr> <td>K</td><td>.015</td><td>.020</td><td>.37</td><td>.51</td><td></td></tr> <tr> <td>L</td><td>.007</td><td>.020</td><td>.20</td><td>.50</td><td></td></tr> </tbody> </table>	DIM	INCHES		MM		NOTE	MIN	MAX	MIN	MAX	A	.110	.120	2.80	3.04		B	.083	.104	2.10	2.64		C	.047	.055	1.20	1.40		D	.035	.041	.89	1.03		E	.070	.081	1.78	2.05		F	.018	.024	.45	.60		G	.0005	.0039	.013	.100		H	.035	.044	.89	1.12		J	.003	.007	.085	.180		K	.015	.020	.37	.51		L	.007	.020	.20	.50	
DIM	INCHES		MM		NOTE																																																																								
	MIN	MAX	MIN	MAX																																																																									
A	.110	.120	2.80	3.04																																																																									
B	.083	.104	2.10	2.64																																																																									
C	.047	.055	1.20	1.40																																																																									
D	.035	.041	.89	1.03																																																																									
E	.070	.081	1.78	2.05																																																																									
F	.018	.024	.45	.60																																																																									
G	.0005	.0039	.013	.100																																																																									
H	.035	.044	.89	1.12																																																																									
J	.003	.007	.085	.180																																																																									
K	.015	.020	.37	.51																																																																									
L	.007	.020	.20	.50																																																																									
<b>MECHANICAL DATA</b> <ul style="list-style-type: none"> <li>● Epoxy meets UL 94 V-0 flammability rating</li> <li>● Moisture Sensitivity Level 1</li> <li>● Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)</li> <li>● Weight: 0.008 grams (approx.)</li> </ul>																																																																													


### MAXIMUM RATINGS @25°C UNLESS OTHERWISE SPECIFIED

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Maximum Forward Voltage@IF=10mA	V <sub>F</sub>	0.9	V
Power Dissipation (NoteA)	P <sub>(AV)</sub>	350	mWatt
Operation And Storage Temperature	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	°C
Peak Forward Surge Current(NoteB)	I <sub>FSM</sub>	2	A
Thermal Resistance (Note C)	R <sub>thja</sub>	357	°C/W

#### NOTES:

- A. Mounted on 5.0mm<sup>2</sup>(.013mm thick) land areas.
- B. Measured on 8.3ms, single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.
- C. Valid provided the terminals are kept at ambient temperature

\*Pin Configuration - Top View



# BZX84C2V4 thru BZX84C51



## ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise noted)

Part Number	Marking	Nominal Zener Voltage			Max. Zener Impedance				Max. Reverse Leakage Current	
		Vz(V) @ IzT			ZzT @ IzT		ZzK @ IzK		IR @ VR	
		Nom.	Min.	Max.	Ohm	mA	Ohm	mA	µA	V
BZX84C2V4	W1/Z11	2.4	2.28	2.52	100	5	600	1	50	1.0
BZX84C2V7	W2/Z12	2.7	2.5	2.9	100	5	600	1	20	1.0
BZX84C3V0	W3/Z13	3	2.8	3.2	95	5	600	1	10	1.0
BZX84C3V3	W4/Z14	3.3	3.1	3.5	95	5	600	1	5	1.0
BZX84C3V6	W2/Z15	3.6	3.4	3.8	90	5	600	1	5	1.0
BZX84C3V9	W6/Z16	3.9	3.7	4.1	90	5	600	1	3	1.0
BZX84C4V3	W7/Z17	4.3	4	4.6	90	5	600	1	3	1.0
BZX84C4V7	W8/Z1	4.7	4.4	5	80	5	500	1	3	2.0
BZX84C5V1	W9/Z2	5.1	4.8	5.4	60	5	480	1	2	2.0
BZX84C5V6	WA/Z3	5.6	5.2	6	40	5	400	1	1	2.0
BZX84C6V2	WB/Z4	6.2	5.8	6.6	10	5	150	1	3	4.0
BZX84C6V8	WC/Z5	6.8	6.4	7.2	15	5	80	1	2	4.0
BZX84C7V5	WD/Z6	7.5	7	7.9	15	5	80	1	1	5.0
BZX84C8V2	WE/Z7	8.2	7.7	8.7	15	5	80	1	0.7	5.0
BZX84C9V1	WF/Z8	9.1	8.5	9.6	15	5	100	1	0.5	6.0
BZX84C10	WG/Z9	10	9.4	10.6	20	5	150	1	0.2	7.0
BZX84C11	WH/Y1	11	10.4	11.6	20	5	150	1	0.1	8.0
BZX84C12	WI/Y2	12	11.4	12.7	25	5	150	1	0.1	8.0
BZX84C13	WK/Y3	13	12.4	14.1	30	5	170	1	0.1	8.0
BZX84C15	WL/Y4	15	13.8	15.6	30	5	200	1	0.1	10.5
BZX84C16	WM/Y5	16	15.3	17.1	40	5	200	1	0.1	11.2
BZX84C18	WN/Y6	18	16.8	19.1	45	5	225	1	0.1	12.6
BZX84C20	WO/Y7	20	18.8	21.2	55	5	225	1	0.1	14
BZX84C22	WP/Y8	22	20.8	23.3	55	5	250	1	0.1	15.4
BZX84C24	WR/Y9	24	22.8	25.6	70	5	250	1	0.1	16.8
BZX84C27	WS/Y10	27	25.1	28.9	80	2	300	1	0.1	18.9
BZX84C30	WT/Y11	30	28	32	80	2	300	1	0.1	21
BZX84C33	WU/Y12	33	31	35	80	2	325	1	0.1	23.1
BZX84C36	WW/Y13	36	34	38	90	2	350	1	0.1	25.2
BZX84C39	WX/Y14	39	37	41	130	2	350	1	0.1	27.3
BZX84C43	WY	43	40.85	45.15	150	5	375	1	0.1	30.1
BZX84C47	WZ	47	44.65	49.35	170	5	375	1	0.1	32.9
BZX84C51	XA	51	48.45	53.55	100	5	400	1	0.1	35.7

NOTE:

- Standard zener voltage tolerance is +/- 5% with a 'C' suffix from BZX84C2V4~BZX84C51 , suffix 'B' is +/- 2% tolerance from BZX84B4V3~BZX84B51.
- Zener Voltage (Vz) Measurement. Guarantees the zener voltage when measured at 90 seconds while maintaining the lead temperature (TL) AT 30°C, from the diode body.
- Zener Impedance (Zz) Derivation. The zener impedance os dervied from the 60 cycle ac voltage, which results when an AC current having an rms value equal to 10% of the dc zener current (IzT or IzK) is superimposed on IzT or IzK.
- Surge Current (IR) Non-Repetitive. The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current, IzT, per JEDEC registration; however, actual device capability is as described in Figure 5.



# BZX84B2V4 thru BZX84B51

## ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise noted)

Part Number	Marking	Nominal Zener Voltage			Max. Zener Impedance				Max. Reverse Leakage Current	
		Vz(V) @ IzT			ZzT @ IzT		ZzK @ IzK		IR @ VR	
		Nom.	Min.	Max.	Ohm	mA	Ohm	mA	µA	V
BZX84B4V3	W7	4.3	4.21	4.39	90	5	600	1	3.0	1.0
BZX84B4V7	W8/Z1	4.7	4.61	4.79	80	5	500	1	3.0	2.0
BZX84B5V1	W9/Z2	5.1	5.00	5.20	60	5	480	1	2.0	2.0
BZX84B5V6	WA/Z3	5.6	5.49	5.71	40	5	400	1	1.0	2.0
BZX84B6V2	WB/Z4	6.2	6.08	6.32	10	5	150	1	3.0	4.0
BZX84B6V8	WC/Z5	6.8	6.66	6.94	15	5	80	1	2.0	4.0
BZX84B7V5	WD/Z6	7.5	7.35	7.65	15	5	80	1	1.0	5.0
BZX84B8V2	WE/Z7	8.2	8.04	8.36	15	5	80	1	0.7	5.0
BZX84B9V1	WF/Z8	9.1	8.92	9.28	15	5	100	1	0.5	6.0
BZX84B10	WG/Z9	10	9.80	10.20	20	5	150	1	0.2	7.0
BZX84B11	WH/Y1	11	10.78	11.22	20	5	150	1	0.1	8.0
BZX84B12	WI/Y2	12	11.76	12.24	25	5	150	1	0.1	8.0
BZX84B13	WK/Y3	13	12.74	13.26	30	5	170	1	0.1	8.0
BZX84B15	WL/Y4	15	14.70	15.30	30	5	200	1	0.1	10.5
BZX84B16	WM/Y5	16	15.68	16.32	40	5	200	1	0.1	11.2
BZX84B18	WN/Y6	18	17.64	18.36	45	5	225	1	0.1	12.6
BZX84B20	WO/Y7	20	19.60	20.40	55	5	225	1	0.1	14.0
BZX84B22	WP/Y8	22	21.56	22.44	55	5	250	1	0.1	15.4
BZX84B24	WR/Y9	24	23.52	24.48	70	5	250	1	0.1	16.8
BZX84B27	WS/Y10	27	26.46	27.54	80	5	300	1	0.1	18.9
BZX84B30	WT/Y11	30	29.40	30.60	80	5	300	1	0.1	21.0
BZX84B33	WU/Y12	33	32.34	33.66	80	5	325	1	0.1	23.1
BZX84B36	WW/Y13	36	35.28	36.72	90	5	350	1	0.1	25.2
BZX84B39	WX/Y14	39	38.22	39.78	130	5	350	1	0.1	27.3
BZX84B43	WY	43	42.14	43.86	150	5	375	1	0.1	30.1
BZX84B47	WZ	47	46.06	47.94	170	5	375	1	0.1	32.9
BZX84B51	XA	51	49.98	52.02	100	5	750	1	0.1	38.0


### NOTE:

- Standard zener voltage tolerance is +/- 5% with a 'C' suffix from BZX84C2V4~BZX84C51 , suffix 'B' is +/- 2% tolerance from BZX84B4V3~BZX84B51.
- Zener Voltage (Vz) Measurement. Guarantees the zener voltage when measured at 90 seconds while maintaining the lead temperature (TL) AT 30°C, from the diode body.
- Zener Impedance (Zz) Derivation. The zener impedance os dervied from the 60 cycle ac voltage, which results when an AC current having an rms value equal to 10% of the dc zener current (Izt or Izk) is superimposed on Izt or Izk.
- Surge Current (IR) Non-Repetitive. The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current, Izt, per JEDEC registration; however, actual device capability is as described in Figure 5.

# RATING AND CHARACTERISTIC CURVES


## BZX84 SERIES

**HY**

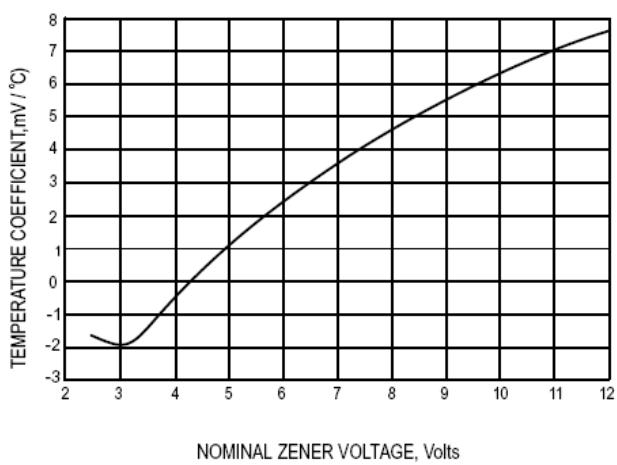


NOMINAL ZENER VOLTAGE, Volts

TYPICAL REVERSE CURRENT

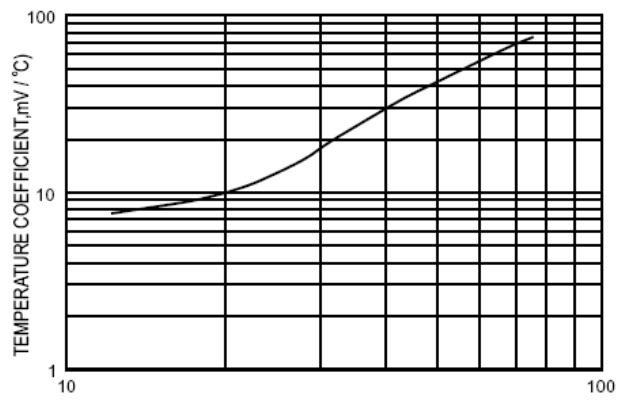


NOMINAL ZENER VOLTAGE, Volts

TEMPERATURE COEFFICIENTS

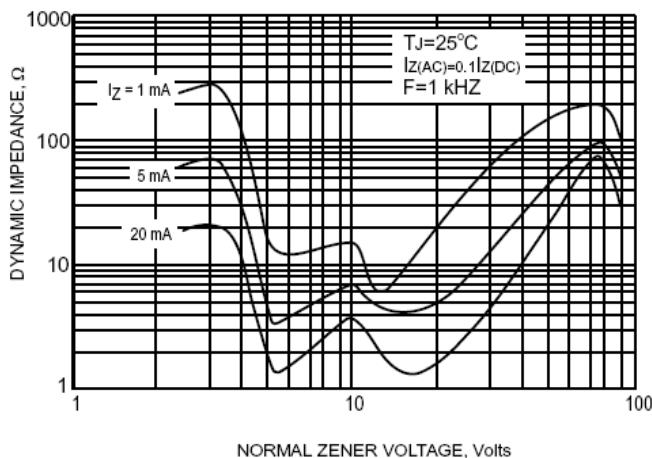


NORMAL ZENER VOLTAGE, Volts

EFFECT OF ZENER VOLTAGE ON ZENER IMPEDANCE

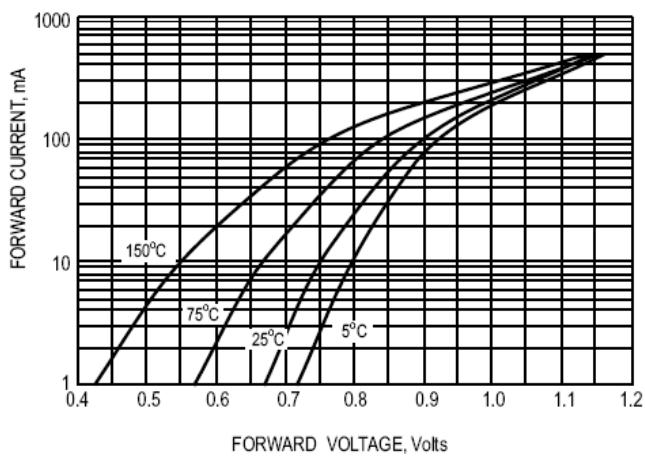


FORWARD VOLTAGE, Volts

TYPICAL FORWARD VOLTAGE

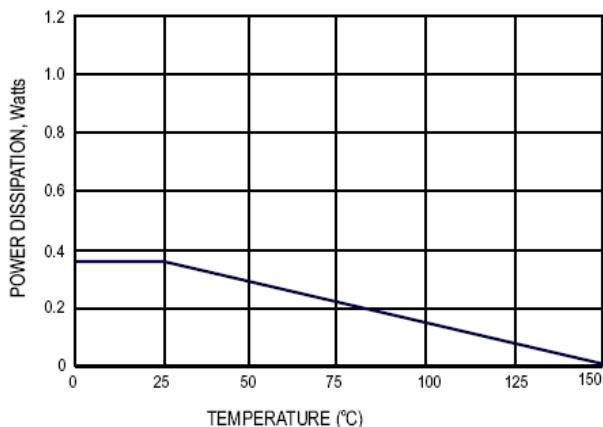




TEMPERATURE (°C)

STEADY STATE POWER DERATING

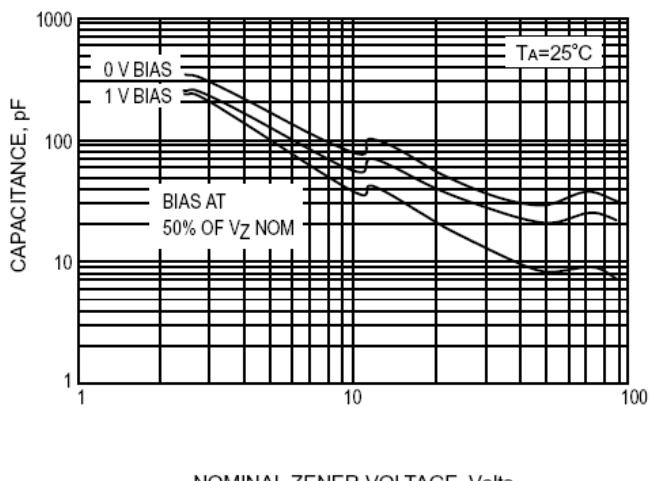

NOMINAL ZENER VOLTAGE, Volts

TYPICAL CAPACITANCE

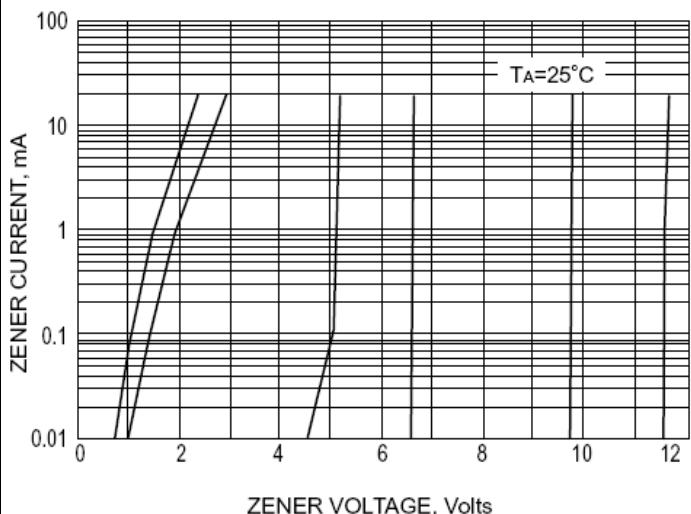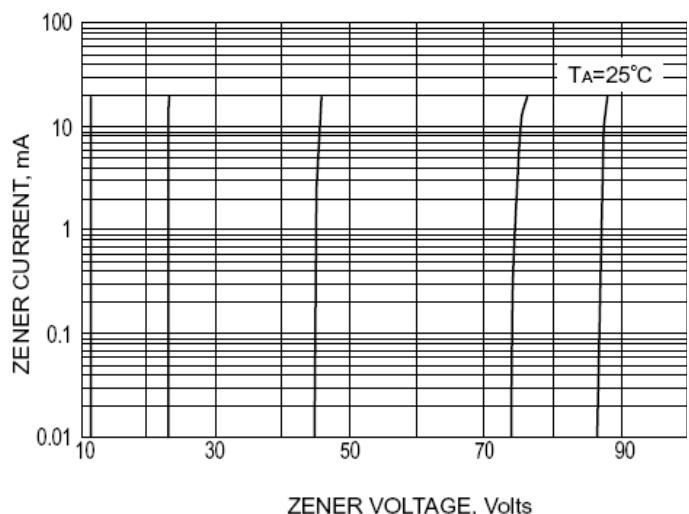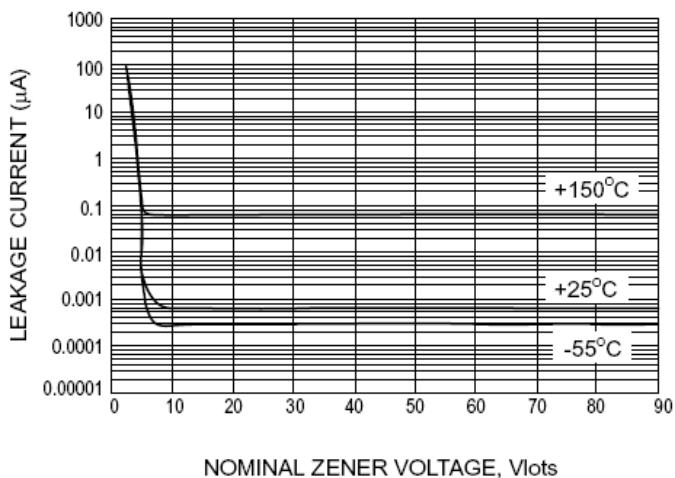**HY****RATING AND CHARACTERISTIC CURVES  
BZX84 SERIES****ZENER VOLTAGE V.S. ZENER CURRENT****ZENER VOLTAGE V.S. ZENER CURRENT****TYPICAL LEAKAGE CURRENT**