SILICON PASSIVATED THREE PHASE BRIDGE RECTIFIERS

REVERSE VOLTAGE - **50** to **1600** Volts

FORWARD CURRENT - **25/35** Ampreres

FEATURES

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- Ideal for Printed Circuit Boards

MECHANICAL DATA

- Case:Epoxy Case with Heat Sink Interally Mounted in the Bridge Encapsulation
- Terminals:Plated Leads Soiderable per MIL-STD-202,Method 208
- Polarity:As Marked on Body
- Weight:20 grams(approx.)
- Mounting Position: Bolt Down on Heatsink With Silicone Thermal Compound Between Bridge and Mounting Surface for Maximum Heat Transfer Efficiency
- Mounting Torque:20 in lbs. Max.

SBR

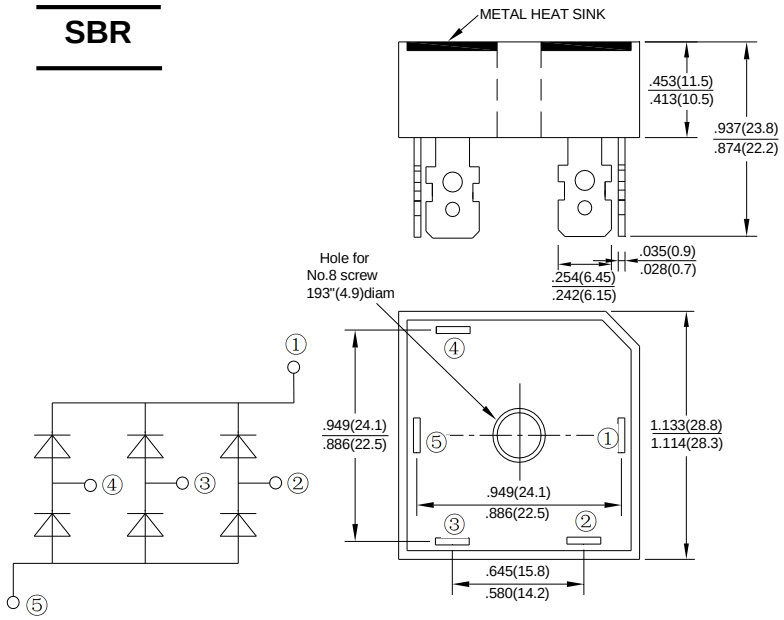

Dimensions in inches and (milimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25℃ ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.For capacitive load, derate current by 20%

VOLTAGE RATINGS

CHARACTERISTICS	SYMBOL	-00	-01	-02	-04	-06	-08	-10	-12	-14	-16	UNIT
Peak Repetitive Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	1000	1200	1400	1600	V
Peak Non-Repetitive Reverse Voltage	V_{RSM}	75	150	275	500	725	900	1100	1300	1500	1700	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	840	980	1120	V

FORWARD CONDUCTION

CHARACTERISTICS	SYMBOL	SBR25	SBR35	UNIT
Maximum Average Forward Rectified Current @TC=60℃	I_O	25	35	A
Non-Repetitive Peak Forward Surge Current (No Voltage Reapplied t=8.3ms at 60HZ) (No Voltage Reapplied t=10ms at 50HZ) (100% VRRM Reapplied t=8.3ms at 60HZ) (100% VRRM Reapplied t=10ms at 50HZ)	I_{FSM}	 375 360 314 300	 500 475 420 400	A
I2t Rating for fusing (No Voltage Reapplied t=8.3ms at 60HZ) (No Voltage Reapplied t=10ms at 50HZ) (100% VRRM Reapplied t=8.3ms at 60HZ) (100% VRRM Reapplied t=10ms at 50HZ)	I^2t	 580 635 410 450	 1030 1130 730 800	A^2S
Maximum Forward Voltage drop per element at 12.5A/17.5A Peak	V_F	1.1	1.2	V
Peak Reverse Current (per leg) @T_J=25℃ At Rated DC Blocking Voltage @TJ=125℃	I_R	10 5.0		μA mA
RMS Isolation Voltage from Case to Lead	V_{ISO}	2500		V

THERMAL CHARACTERISTICS

Operating Temperature Range	T_J	-55 to +150		℃
Storage Temperature Range	T_{STG}	-55 to +150		℃
Thermal Resistance Junction to Case at DC Operation per Bridge	$R_{\theta JC}$	1.42	1.16	K/W
Thermal Resistance Case to Heatsink Mounting Surface, Smooth, Flat and Greased	$R_{\theta CS}$	0.2		K/W

REV. 3, 04-Jun-2014

FIG.1-CURRENT RATING CHARACTERISTICS

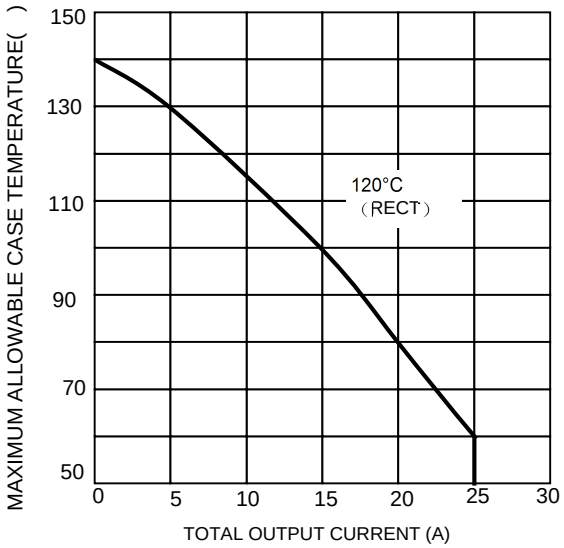

FIG.2-FORWARD VOLTAGE DROP CHARACTERISTICS

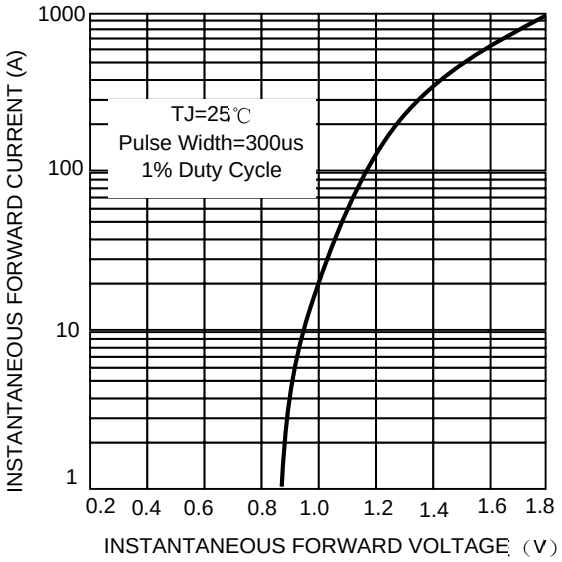

FIG.3-TOTAL POWPER LOSS CHARACTERISTICS

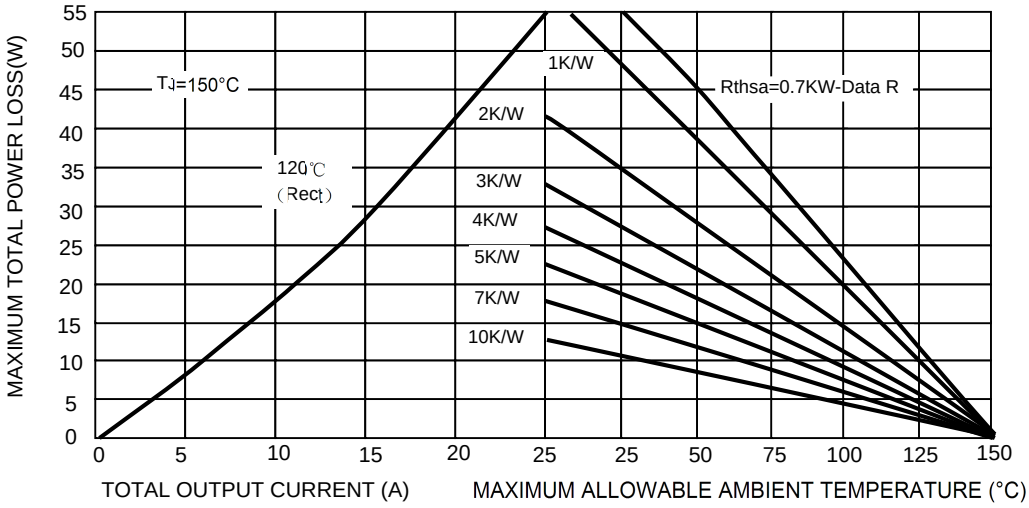

FIG.4-MAXIMUM NON-REPETITIVE SURGE CURRENT

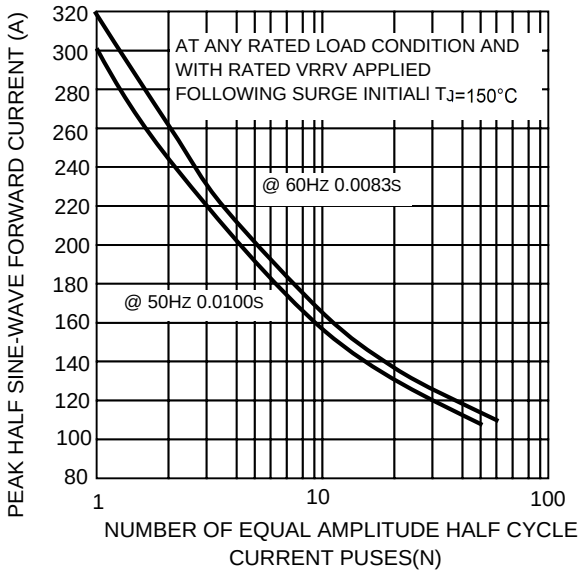

FIG.5-MAXIMUM NON-REPETITIVE SURGE CURRENT

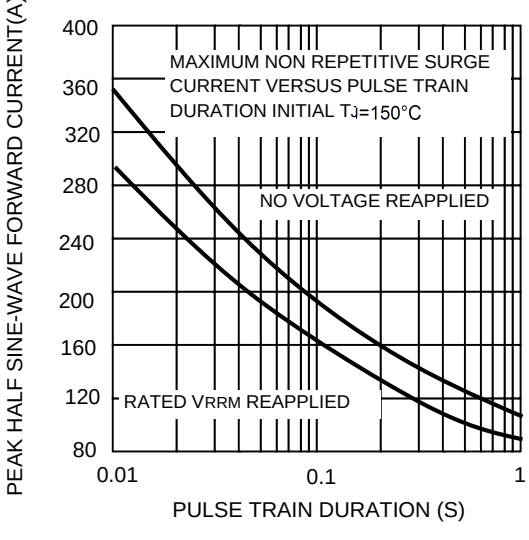

REV. 3, 04-Jun-2014

FIG.6-CURRENT RATING CHARACTERISTICS

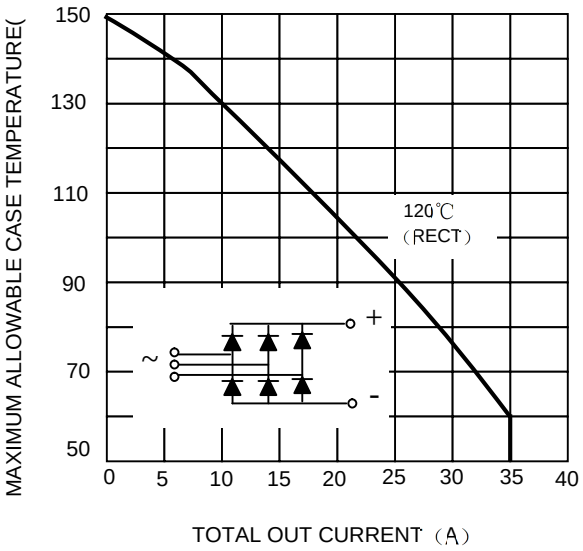

FIG.2-FORWARD VOLTAGE DROP CHARACTERISTICS

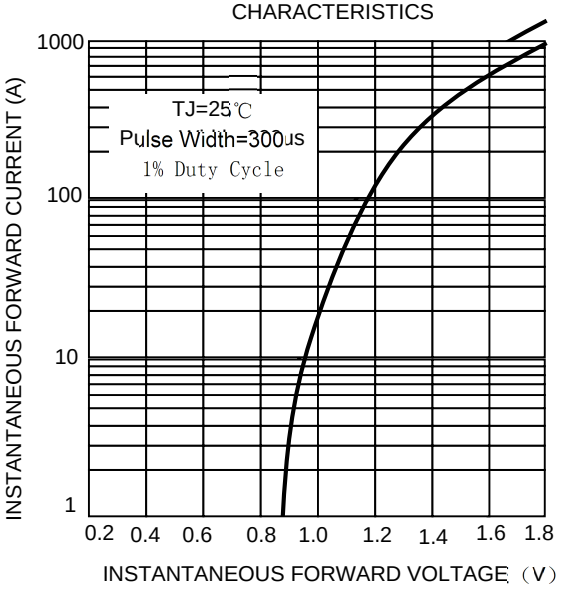

FIG.8-TOTAL POWER LOSS CHARACTERISTICS

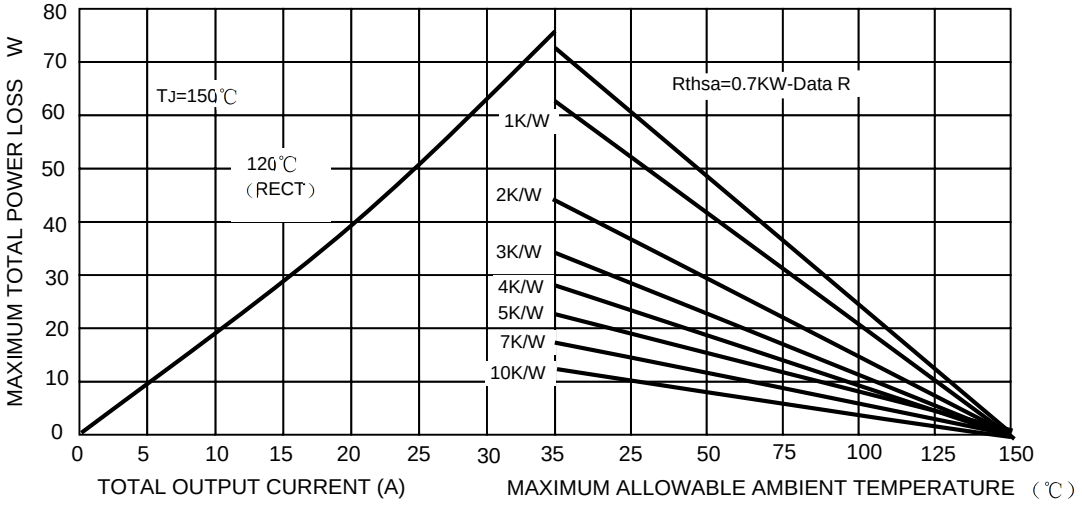

FIG.9-MAXIMUM NON-REPETITIVE SURGE CURRENT

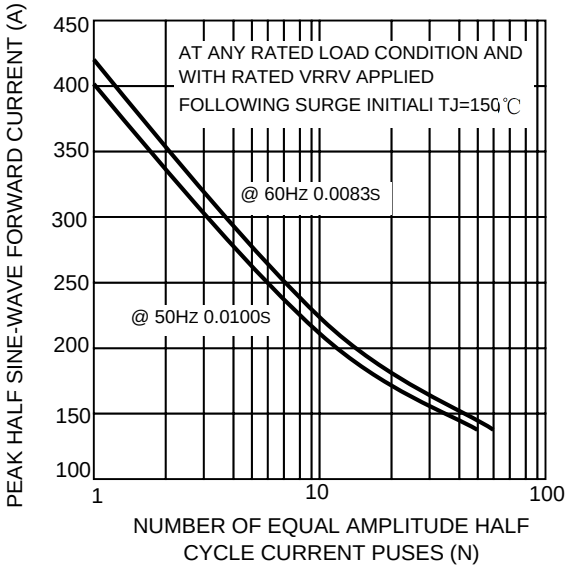

FIG.10-MAXIMUM NON-REPETITIVE SURGE CURRENT

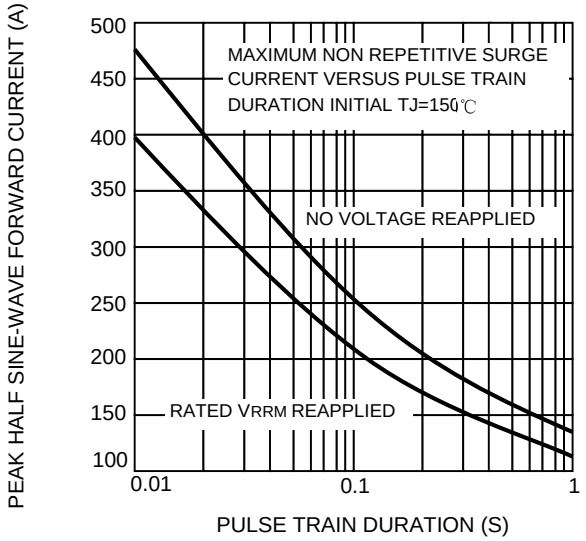

REV. 3, 04-Jun-2014

FIG.11-THERMAL IMPEDANCE Z_{THJC} CHARACTERISTICS

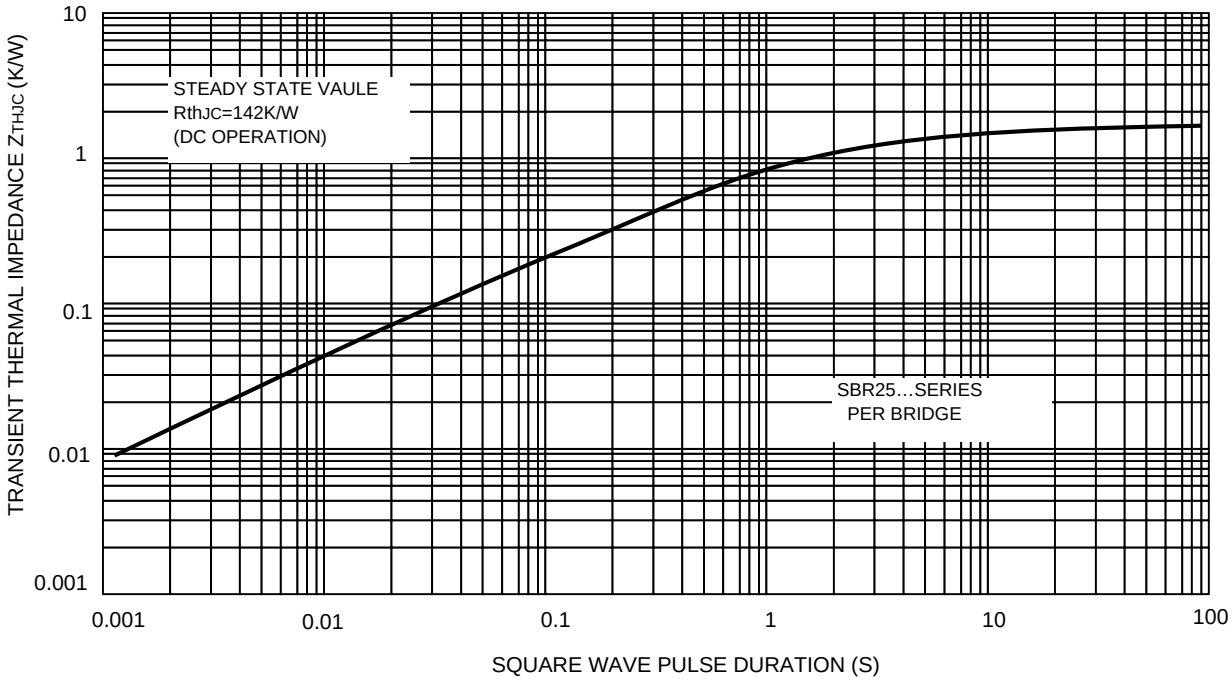

FIG.12-THERMAL IMPEDANCE Z_{THJC} CHARACTERISTICS

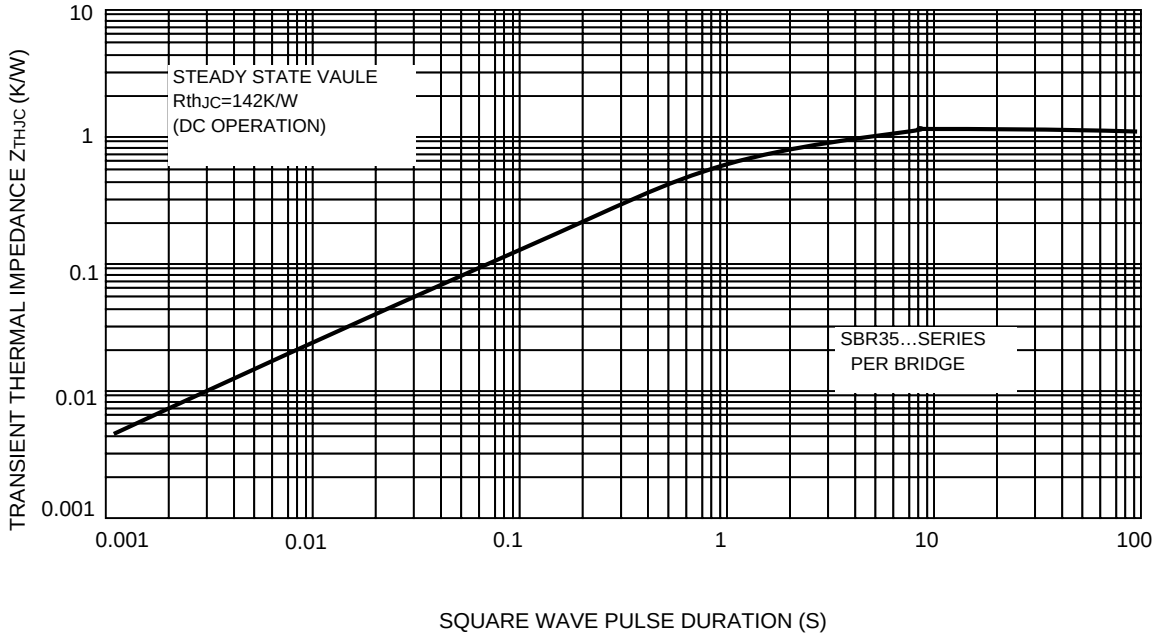

REV. 3, 04-Jun-2014