


Features


- Height: 5.4mm.
- Load life:105°C, 1000hours.
- Low leakage current (0.5μA to 2.0μA max.)
- Corresponding product to RoHS

SPECIFICATION

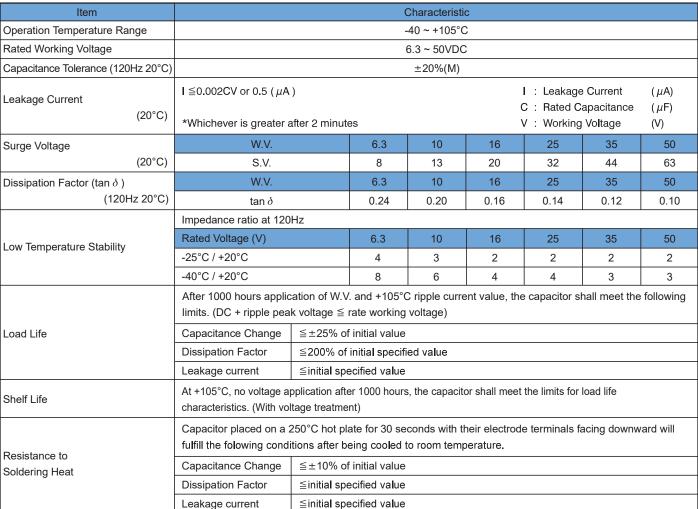

DIMENSIONS (mm)

D	L	Α	Н	- 1	W	Р	K	
4.0	5.4	4.3	5.5MAX	1.8	0.65±0.1	1.0	0.35 +0.15 -0.20	
5.0	5.4	5.3	6.5MAX	2.2	0.65±0.1	1.5	0.35 +0.15 -0.20	
6.3	5.4	6.6	7.8MAX	2.6	0.65±0.1	2.1	0.35 +0.15 -0.20	



CHIP TYPE

CASE SIZE & MAX RIPPLE CURRENT

Case size	:DxL		(mm)
Max ripple current	: mA(rms)	105°C	120Hz

V(DC)	6	.3	10		16		25		35		50	
μF Item	DxL	R.C.										
0.1											4x5.4	3
0.22											4x5.4	4
0.33											4x5.4	5
0.47											4x5.4	5
1.0											4x5.4	8
2.2											4x5.4	12
3.3											4x5.4	14
4.7							4x5.4	14	4x5.4	15	5x5.4	19
10					4x5.4	20	5x5.4	24	5x5.4	26	6.3x5.4	32
22	4x5.4	24	5x5.4	30	5x5.4	33	6.3x5.4	41	6.3x5.4	44		
33	5x5.4	33	5x5.4	36	6.3x5.4	46	6.3x5.4	50				
47	5x5.4	39	6.3x5.4	50	6.3x5.4	55						
100	6.3x5.4	65	6.3x5.4	70								