

# 承 认 书

## APPROVAL SHEET

客 户：  
CUSTOMER**Ropla**承认书编号：  
APP. NO.**D180012314**系 列：  
SERIES**TV**使用温度范围：  
OPERATION  
TEMP.**-55~+105°C**

| 凯美产品料号 JAMICON PART NO. : | 客户产品料号 CUSTOMER PART NO. : |
|---------------------------|----------------------------|
| JKV476M063S1A5G11L        |                            |
| JKV477M016S1A5H1CL        |                            |

|                                    |   |            |
|------------------------------------|---|------------|
| 客户承认印<br>CUSTOMER'S APPROVAL STAMP | 凯美电机股份有限公司(总部)<br>KAIMEI ELECTRONIC CORP.(Headquarters)                               |            |
|                                    |  |            |
|                                    | APPROVED BY:  | TESTED BY: |
|                                    | 高維琴   | 許洪梅        |

凯美电机股份有限公司  
新北市汐止区新台五路一段81号13楼之2KAIMEI ELECTRONIC CORP.(Headquarters)  
13th. FL., No.81, SEC. 1, XINTAI 5th RD. XIZHI DIST.  
New Taipei City 22101, Taiwan R.O.C  
Tel: +886-2-26981010 Fax: +886-2-26980386凯捷国际有限公司  
香港上环干诺道西88号粤财大厦22楼JAMICON INTERNATIONAL LIMITED  
22/F, Guangdong Finance Building, 88 Connaught Road West,  
Sheung Wan, Hong Kong  
Tel: +886-2-26981010 Fax: +886-2-26980386东莞今美康电子有限公司  
东莞市塘厦镇高丽工业区6号A2栋1楼  
102室、103室DONGGUAN JAMICON ELECTRONIC CO., LTD  
Room 102/103, 1st Floor, Building A2, No. 6, Gaoli Industrial  
Zone, Tangxia Town, Dongguan City, Guangdong Province, China  
Tel: +86-769-87919555苏州凯美电子有限公司  
苏州市相城区望亭镇问渡路68号SUZHOU KAIMEI ELECTRONIC CO., LTD  
No. 68 Wendu Rd, Wangting Town, Xiangcheng District,  
Suzhou City, Jiangsu Province, China.  
Tel : +86-512-65388640 Fax :+86-512-65381888

Table of specification and characteristics 规格和特性表


| NO. | 料号<br>Part NO.     | 静电容量<br>CAP(μF) | 容差<br>CAP   | 工作电压<br>WV    | 损失角<br>DF(%)   | 阻抗值<br>Z(mΩ)  | 漏电流<br>LC(μA) | 纹波电流<br>RC(mArms) | 负荷寿命<br>Load Life<br>(Hrs) | 尺寸<br>Dimensions<br>(mm) |      |     |
|-----|--------------------|-----------------|-------------|---------------|----------------|---------------|---------------|-------------------|----------------------------|--------------------------|------|-----|
|     |                    | 120Hz<br>Tol.   | 20°C<br>(%) | 120Hz<br>20°C | 100kHz<br>20°C | (MAX)<br>20°C | (MAX)<br>20°C | (MAX)<br>105°C    | (MAX)<br>105°C             | φD                       | L    | F   |
| 1   | JTV476M063S1A5G11L | 47              | ±20         | 63            | 14             | 690           | 29.61         | 190               | 7000                       | 8                        | 11   | 3.5 |
| 2   | JTV477M016S1A5H1CL | 470             | ±20         | 16            | 16             | 160           | 75.2          | 840               | 7000                       | 10                       | 12.5 | 5.0 |

## I . Scope 范围

This standard defines characteristics and dimensions for aluminum electrolytic capacitors named TV Series is long life and low impedance product.

此标准描述了铝电解电容器长寿命低阻抗TV系列的特性和尺寸。

## II . Construction & Dimensions 尺寸图

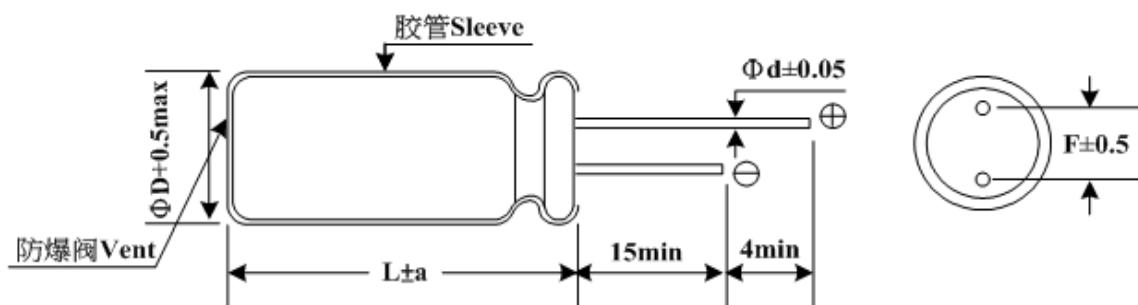

\*Safety vent only for :Dimension  $\geq 6.3 \times 11$

|                      |     |     |     |     |      |     |     |     |
|----------------------|-----|-----|-----|-----|------|-----|-----|-----|
| Diameter 直径(φD)      | 5   | 6.3 | 8   | 10  | 12.5 | 13  | 16  | 18  |
| Lead space 引线间距(F)   | 2.0 | 2.5 | 3.5 | 5.0 | 5.0  | 5.0 | 7.5 | 7.5 |
| Lead diameter 线径(φd) | 0.5 | 0.5 | 0.6 | 0.6 | 0.6  | 0.6 | 0.8 | 0.8 |
| a                    | 1.5 | 1.5 | 1.5 | 1.5 | 2.0  | 2.0 | 2.0 | 2.0 |

## III . Characteristics 特性

### Standard test condition 标准试验条件

Unless otherwise specified all tests shall be performed at, or referred to, an ambient temperature of 20°C and a relative humidity not greater than 60%.

所有的试验应在环境温度20°C和相对湿度小于等于60%的条件下进行，除非另有规定。

### Operating Temperature Range 工作温度范围

6.3~100VDC — 55~+105°C

**1. Electrical characteristics 电气特性****(1). Working Voltage and Surge Voltage 工作电压和浪涌电压**

WV: Working Voltage 工作电压(VDC)

SV: Surge Voltage 浪涌电压 (V)

|    |     |    |    |    |    |    |    |     |
|----|-----|----|----|----|----|----|----|-----|
| WV | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 |
| SV | 8   | 13 | 20 | 32 | 44 | 63 | 79 | 125 |

**(2). Leakage Current 漏电流**

The maximum leakage current is specified in the following formula after DC working voltage applied for 2 minutes.


印加直流工作电压2分钟后的最大漏电流值如下列公式所示：

 $I=0.01CV$  or  $3 (\mu A)$ , Whichever is greater任意一个较大值.where I: Leakage Current (漏电流) ( $\mu A$ )

Measurement circuit 测试电路

C: Nominal Capacitance (标称容量) ( $\mu F$ )

V: Rated Voltage (额定电压) (V)

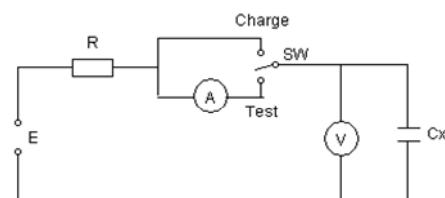**(3). Dissipation Factor 损失角**

Dissipation Factor at 120Hz/ 20°C shall not exceed the values given in the table below.

在120 Hz / 20°C 条件下的DF值不应超过下表中给出的值。

|       |     |    |    |    |    |    |    |     |
|-------|-----|----|----|----|----|----|----|-----|
| WV    | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 |
| DF(%) | 22  | 19 | 16 | 14 | 12 | 14 | 14 | 14  |

Note: Above DF specifications shall be 2% added for every 1000 $\mu F$  capacitor exceeding 1000 $\mu F$ .Down size tan $\delta$  add 3%.注：当静电容量超过1000 $\mu F$ 时，每增加1000 $\mu F$ ，则以上损失角规格值应增加2%，降尺寸产品损失角规格值应增加3%。**(4). Low Temperature Characteristics 低温特性**

The ratio of impedance at -25°C/+20°C and -40°C/+20°C of the capacitor shall be less than the following value at 120Hz.

电容器在120Hz的条件下, 分别在-25°C/+20°C和-40°C/+20°C的阻抗比, 应小于以下的规格值:

| WV额定电压<br>Z阻抗(120Hz) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 |
|----------------------|-----|----|----|----|----|----|----|-----|
| Z(-25°C) / Z(+20°C)  | 4   | 3  | 2  | 2  | 2  | 2  | 2  | 2   |
| Z(-40°C) / Z(+20°C)  | 8   | 6  | 4  | 3  | 3  | 3  | 3  | 3   |

**(5). Multiplier for Ripple Current 纹波电流频率修正系数**

Frequency coefficient 频率系数

| Frequency 频率(Hz)  | 120  | 1k   | 10k  | 100k |
|-------------------|------|------|------|------|
| 22~180 $\mu F$    | 0.40 | 0.75 | 0.90 | 1.00 |
| 220~560 $\mu F$   | 0.50 | 0.85 | 0.94 | 1.00 |
| 680~1800 $\mu F$  | 0.60 | 0.87 | 0.95 | 1.00 |
| 2200~3900 $\mu F$ | 0.75 | 0.90 | 0.95 | 1.00 |
| $\geq 4700\mu F$  | 0.85 | 0.95 | 0.98 | 1.00 |

## Temperature coefficient 温度系数

| Ambient Temperature (°C)<br>环境温度 (°C) | $\leq 50$ | 70   | 85   | 105  |
|---------------------------------------|-----------|------|------|------|
| Coefficient 系数                        | 1.90      | 1.75 | 1.40 | 1.00 |

**2. Mechanical Characteristics 机械特性****Lead Pull Test 导针拉力测试**

Capacitors shall be withstand the pull test shown in the following table.

电容器的导针应能承受下表所示的拉力测试

| Lead diameter<br>线径(mm) | Load<br>负荷(kg) | Test time<br>测试时间(sec) |
|-------------------------|----------------|------------------------|
| $d \leq 0.5$            | 0.5            | 30±1                   |
| $0.5 < d \leq 0.8$      | 1.0            | 30±1                   |
| $0.8 < d \leq 1.2$      | 2.5            | 30±1                   |

**3. Endurance characteristics 耐久特性****(1). Load Life 负荷寿命**

After applying rated voltage with rated ripple current for specified time (refer to the below table for specified time) at  $105 \pm 2^\circ\text{C}$ , when the capacitors are restored to  $20^\circ\text{C}$ , the capacitors shall meet the following requirements.

在 $105 \pm 2^\circ\text{C}$ 环境中，不超过额定电压的范围内叠加额定纹波电流达规定时间后（规定时间参考下表），待温度恢复至 $20^\circ\text{C}$ 后测试，电容器应满足以下要求。

| $\varphi D$ | $\varphi 5 \sim 6.3$ | $\varphi 8 \sim 10$ | $\varphi 12.5 \sim 18$ |
|-------------|----------------------|---------------------|------------------------|
| 6.3~10V     | 4000hours            | 6000hours           | 8000hours              |
| 16~100V     | 5000hours            | 7000hours           | 10000hours             |

|                            |   |
|----------------------------|---|
| Capacitance Change<br>容量变化 | Within $\pm 25\%$ of initial value<br>在初始值的 $\pm 25\%$ 以内 |
| Dissipation Factor<br>损失角  | Not more than 200% of specified value<br>不超过规格值的200%      |
| Leakage Current<br>漏电流     | Not more than the specified value<br>不超过规格值               |

**(2). Shelf life 高温无负荷寿命**

After placed at  $105 \pm 2^\circ\text{C}$  without voltage applied for 1000+12/-0 hours, when the capacitors are restored to  $20^\circ\text{C}$ , the capacitors shall meet the following requirements.

(Reference JIS C5101-4 4.1)

在 $105 \pm 2^\circ\text{C}$ 环境中，无负荷放置1000+12/-0小时，待温度恢复至 $20^\circ\text{C}$ 进行测量时，电容器应满足以下要求：(参考JIS C5101-4 4.1)：

|                            |   |
|----------------------------|---|
| Capacitance Change<br>容量变化 | Within $\pm 25\%$ of initial value<br>在初始值的 $\pm 25\%$ 以内 |
| Dissipation Factor<br>损失角  | Not more than 200% of specified value<br>不超过规格值的200%      |
| Leakage Current<br>漏电流     | Not more than the specified value<br>不超过规格值               |

**(3). Solderability test 焊锡性试验**

The following specifications shall be satisfied when the lead wires are tested in solder bath at  $245\pm5^{\circ}\text{C}$  for  $2.5\pm0.5$  seconds, more than 95% of the terminal surface shall be covered with new solder.

当导针在 $245\pm5^{\circ}\text{C}$ 的焊锡槽中试验 $2.5\pm0.5$ 秒后，95%以上的端子表面应当要被新焊料覆盖。

**(4). Solder Heat Resistance Test 焊锡耐热试验**

The following specifications shall be satisfied when the lead wires are tested in solder bath at  $275+2/-0^{\circ}\text{C}$  for  $20\pm0.5$  seconds.

当导针在 $275+2/-0^{\circ}\text{C}$ 的焊锡槽中试验 $20\pm0.5$ 秒后，应当满足以下要求：

|                         |  |
|-------------------------|--|
| Capacitance Change 容量变化 | $\leq\pm5\%$ of the initial value $\leq$ 初始值的 $\pm5\%$ |
| Dissipation factor 损失角  | $\leq$ Initial specified value 低于初始规格值                 |
| Leakage Current 漏电流     | $\leq$ Initial specified value 低于初始规格值                 |

**IV. Mounting 安装**

The paper separators and the electrolytic-conductive electrolytes in a non-solid aluminum electrolytic capacitor is flammable.

非固态电容器内中的电解纸和电解液都是易燃品。

Leaking electrolyte on a PC board can gradually erode the copper traces, possibly causing smoke or burning by short-circuiting the copper traces.

PC板上漏液会逐渐侵蚀铜丝，很可能由于铜丝短路导致冒烟或燃烧。

Verify the following points when designing a PC board.

在设计PC板时需验证以下要点：

- (1) Provide the appropriate hole spacing on the PC board to match the terminal spacing of the capacitor. 在PC板上保留适当的孔距以匹配电容器的端子间距。
- (2) Make the following open space over the vent so that the vent can operate correctly.

| Case diameter 铝壳直径             | Clearance 间隔 |
|--------------------------------|--------------|
| $\varphi6.3 \sim \varphi13$ mm | $\geq 2$ mm  |
| $\varphi16 \sim \varphi35$ mm  | $\geq 3$ mm  |
| $\geq\varphi40$ mm             | $\geq 5$ mm  |

- (3) Do not place any wires or copper traces over the vent of the capacitor.

请不要在电容器的防爆阀上方放置任何电线或铜丝。

- (4) Installing a capacitor with the vent facing the PC board needs an appropriate ventilation hole in PC board. 在安装电容器时，如果防爆阀正对PC板，则PC板上需要开一个适当的通风孔。

- (5) Do not pass any copper traces beneath the seal side of a capacitor.

The trace must pass 1 or 2 mm to the side of the capacitor.

请不要在电容器的封口部下面进行电路配线。如果在电容器附近配线，请确保线路与电容器间隔 $1\sim2$ mm。

- (6) Avoid placing any heat-generating objects adjacent to a capacitor or even on the reverse side of the PC board.

请不要在电容器周围或PC板的背面放置任何发热部件。

(7) Do not pass any via holes or underneath a capacitor.

请不要从电容器通孔或电容器底部穿过。

(8) In designing double-sided PC boards, do not locate any copper trace under the seal side of capacitor.设计双面PC板时，请不要在电容器的封口面放置任何铜丝。

(9) The liquid aluminum electrolytic capacitor can't be reflow soldering, please contact us if you need to do that. 液态铝电解电容器不能进行回流焊，如需进行回流焊请与我司联系。

(10) For the capacitor that diameter > 13 Φ and the Pen-cap that diameter  $\leq$  13 Φ , it is recommended to be fixed on the PCB with fixed adhesive when installed, so as to enhance their vibration resistance.

直径>13Φ的电容和直径 $\leq$ 13Φ的笔形电容，为增强其抗振动能力，建议安装时用固定胶辅助其固定于PCB上。

## V . Storage Condition 储存条件

(1) Aluminum Electrolytic Capacitors should not be stored in high temperatures or where there is a high level of humidity. The suitable storage condition is 5~35°C and less than 75% in relative humidity.

铝电解电容器不应当储存在高温或高湿的条件下. 合适的储存条件为5~35°C，相对湿度低于75%。

(2) Aluminum Electrolytic Capacitors should not be stored in damp conditions such as water, saltwater spray or oil spray.

铝电解电容器不应当储存在潮湿的条件下，如水、盐水喷雾或油雾

(3) Do not store Aluminum Electrolytic Capacitors in an environment full of hazardous gas (hydrogen sulfide , sulfurous acid gas, nitrous acid, chlorine gas, ammonium, etc...).

请不要将铝电解电容器存储在一个充满有害气体的环境下(硫化氢、二氧化硫、亚硝酸、氯气、铵气等… )。

(4) Aluminum Electrolytic Capacitors should not be stored under exposure to ozone, ultraviolet rays or radiation.

铝电解电容器储存不应暴露在臭氧、紫外线辐射和射线中。

(5) If a capacitor has been stored for more than one year under normal temperature (shorter if high temperature) and it shows increased leakage current, then a treatment by voltage application is recommended. The capacitor which hasn't been treated mustn't be used directly. 如果电容器在常温下储存超过一年(高温条件下不超过一年)，出现漏电流上升现象，那么建议对电容器进行加压处理. 未被处理过的电容器不能直接使用。

## VI. Marking 标识

Marking on capacitor include 电容器上的标识包含 :



← JAMICON trademark 商标

← Polarity of the terminals 负极标示线

47  $\mu$ F

63 V

← Capacitance and Rate voltage 标称容量和工作电压

TV P 105°C

← Series and Maximan operating temperature, PET Sleeve.  
系列和最高工作温度及PET胶管

x x x x x (x)

Weeks of production 生产周期

Year of production 生产年份

**Remark:** Date code numbering system. Date code is indicated manufactured date

备注: 周期编号系统, 周期是表示生产日期.

Manufactured year 生产年份

| Year | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 | 2017 | 2018 | 2019 |
|------|------|------|------|------|------|------|------|------|------|------|
| Code | 0    | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    |

Manufactured month 生产月份

| Month | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
|-------|----|----|----|----|----|----|----|----|----|----|----|----|
| Code  | 04 | 08 | 12 | 16 | 20 | 24 | 28 | 32 | 36 | 40 | 44 | 48 |

**VII. Catalog numbering**

JAMICON TYPE 类型(Part Number 料号) :

|   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| J | T | V | 4 | 7 | 6 | M | 0 | 6 | 3  | S  | 1  | A  | 5  | G  | 1  | 1  | L  |

Special code 特殊代码  
(L:JAMICON)

Size 尺寸

Sleeve (Black with white printing)  
胶管 (黑底白字印刷)Spec (A:Standard)  
规格 (A:標準品)

Lead Process 导针加工型号

Voltage 电压

Cap. Tolerance 容量公差

Capacitance 静电容量

Series No. 系列编号

Type类型(DIP PET)

**VIII.PACKAGING SPECIFICATION 包装规范**

Miniature Aluminum Electrolytic Capacitors 小型化铝电解电容器

For Bulk: Standard Cutting &amp; Forming 针对散装：标准切脚&amp;成型

| Classification<br>分类       | Standard Bulk 标准品散装            |                            |                               |                           | Cutting & Forming 切脚&成型        |                            |                               |                           | Min. ordering<br>amount<br>最小订购<br>数量 |
|----------------------------|--------------------------------|----------------------------|-------------------------------|---------------------------|--------------------------------|----------------------------|-------------------------------|---------------------------|---------------------------------------|
| Case size<br>尺寸<br>D*L(mm) | Vinyl bag<br>Qty 袋装数<br>量(pcs) | inner box<br>内箱数量<br>(pcs) | outer carton<br>外箱数量<br>(pcs) | gross<br>weight<br>总重(kg) | Vinyl bag<br>Qty 袋装数<br>量(pcs) | inner box<br>内箱数量<br>(pcs) | outer carton<br>外箱数量<br>(pcs) | gross<br>weight<br>总重(kg) | kpcs                                  |
| 4×5                        | 2,000                          | 24,000                     | 48,000                        | 13                        | 2,000                          | 20,000                     | 80,000                        | 20                        | 25                                    |
| 4×7                        | 2,000                          | 20,000                     | 40,000                        | 11                        | 2,000                          | 16,000                     | 64,000                        | 17                        | 25                                    |
| 5×5                        | 2,000                          | 20,000                     | 40,000                        | 12                        | 2,000                          | 16,000                     | 64,000                        | 18                        | 25                                    |
| 5×7                        | 2,000                          | 16,000                     | 32,000                        | 13                        | 2,000                          | 16,000                     | 64,000                        | 23                        | 25                                    |
| 5×11                       | 1,000                          | 12,000                     | 24,000                        | 13                        | 1,000                          | 10,000                     | 40,000                        | 22                        | 25                                    |
| 6.3×5                      | 2,000                          | 16,000                     | 32,000                        | 11                        | 2,000                          | 10,000                     | 40,000                        | 16                        | 20                                    |
| 6.3×7                      | 2,000                          | 12,000                     | 24,000                        | 10                        | 2,000                          | 10,000                     | 40,000                        | 15                        | 20                                    |
| 6.3×11,6.3X15              | 1,000                          | 10,000                     | 20,000                        | 14                        | 1,000                          | 7,000                      | 28,000                        | 17                        | 20                                    |
| 8×7                        | 500                            | 10,000                     | 20,000                        | 14                        | 500                            | 6,500                      | 26,000                        | 16                        | 15                                    |
| 8×9,8×11                   | 500                            | 7,500                      | 15,000                        | 17                        | 500                            | 4,000                      | 16,000                        | 18                        | 15                                    |
| 8×14,8X15                  | 500                            | 5,000                      | 10,000                        | 12                        | 500                            | 3,000                      | 12,000                        | 14                        | 15                                    |
| 8×16                       | 500                            | 5,000                      | 10,000                        | 16                        | 200                            | 2,000                      | 8,000                         | 13                        | 15                                    |
| 8×20                       | 200                            | 4,000                      | 8,000                         | 14                        | 200                            | 2,000                      | 8,000                         | 14                        | 15                                    |
| 10×12.5                    | 200                            | 4,000                      | 8,000                         | 15                        | 200                            | 2,000                      | 8,000                         | 15                        | 12                                    |
| 10×15                      | 200                            | 3,600                      | 7,200                         | 16                        | 200                            | 2,000                      | 8,000                         | 18                        | 12                                    |
| 10X16,10×17                | 200                            | 3,600                      | 7,200                         | 17                        | 200                            | 1,600                      | 6,400                         | 15                        | 12                                    |
| 10×20                      | 200                            | 3,000                      | 6,000                         | 19                        | 200                            | 1,400                      | 5,600                         | 17                        | 12                                    |
| 10×25                      | 200                            | 2,400                      | 4,800                         | 17                        | 200                            | 1,200                      | 4,800                         | 16                        | 12                                    |
| 12.5×13,12.5×15            | 200                            | 2,400                      | 4,800                         | 15                        | 200                            | 800                        | 3,200                         | 13                        | 10                                    |
| 12.5×18,12.5×20            | 200                            | 1,800                      | 3,600                         | 15                        | 200                            | 600                        | 2,400                         | 10                        | 10                                    |
| 12.5×25                    | 200                            | 1,200                      | 2,400                         | 14                        | 200                            | 600                        | 2,400                         | 14                        | 10                                    |
| 12.5×30                    | 200                            | 1,200                      | 2,400                         | 16                        | 100                            | 500                        | 2,000                         | 14                        | 10                                    |
| 12.5×34,12.5×36            | 100                            | 1,000                      | 2,000                         | 14                        | 100                            | 300                        | 1,200                         | 12                        | 10                                    |
| 12.5×38,12.5×40            | 100                            | 800                        | 1,600                         | 15                        | 100                            | 300                        | 1,200                         | 15                        | 10                                    |
| 16X15、16X20                | 200                            | 1,000                      | 2,000                         | 22                        | 200                            | 1,000                      | 2,000                         | 22                        | 5                                     |
| 16X25                      | 200                            | 1,000                      | 2,000                         | 24                        | -                              | 500                        | 4,000                         | 44                        | 5                                     |
| 16X30、16X32                | 200                            | 800                        | 1,600                         | 20                        | -                              | 500                        | 3,000                         | 37                        | 5                                     |
| 16X36、16X40                | 200                            | 600                        | 1,200                         | 22                        | -                              | 500                        | 3,000                         | 55                        | 5                                     |
| 16X45                      | 100                            | 500                        | 1,000                         | 22                        | -                              | -                          | -                             | -                         | 5                                     |
| 18X15、18X20                | 200                            | 800                        | 1,600                         | 21                        | -                              | -                          | -                             | -                         | 2.5                                   |
| 18X22、18X25                | 200                            | 800                        | 1,600                         | 23                        | -                              | 500                        | 2,000                         | 28                        | 2.5                                   |
| 18X30                      | 100                            | 600                        | 1,200                         | 25                        | -                              | -                          | -                             | -                         | 2.5                                   |
| 18X32、<br>18X36、18X40      | 100                            | 500                        | 1,000                         | 25                        | -                              | 500                        | 1,000                         | 25                        | 2.5                                   |
| 18X45、18X50                | 100                            | 300                        | 600                           | 21                        | -                              | 600                        | 1,200                         | 40                        | 2.5                                   |
| 20X25                      | -                              | -                          | -                             | -                         | -                              | 400                        | 800                           | 20                        | 1.5                                   |
| 22X32                      | -                              | -                          | -                             | -                         | -                              | 320                        | 1,920                         | 55                        | 1.5                                   |
| 22X30                      | -                              | -                          | -                             | -                         | -                              | 400                        | 800                           | 25                        | 1.5                                   |
| 22X35、22X40                | 100                            | 300                        | 600                           | 21                        | -                              | 400                        | 800                           | 27                        | 1.5                                   |

For Taping Ammo &amp; Reel 针对编带折迭式&amp;圆盘式：

| Classification<br>分类 | Ammo Tape 折迭式编带         |                     |                            |                         |                           | Reel Tape 圆盘式编带                        |  |                           | Min. ordering<br>amount<br>最小订购数量 |
|----------------------|-------------------------|---------------------|----------------------------|-------------------------|---------------------------|--|--|---------------------------|-----------------------------------|
| Case size<br>D*L(mm) | inner box<br>内盒<br>(mm) | quantity<br>数量(pcs) | outer carton<br>外箱<br>(mm) | quantity<br>数量<br>(pcs) | gross<br>weight<br>总重(kg) | inner carton 内箱<br>350*350*110<br>(mm) | outer carton 外箱<br>370*370*600<br>(mm) | gross<br>weight<br>总重(kg) | kpcs                              |
| 4φ                   | 340×275×50              | 3,000               | 355×297×290                | 15,000                  | 6                         | 3,000                                  | 15,000                                 | 8                         | 25                                |
| 5φ                   | 340×230×50              | 2,000               | 355×252×290                | 10,000                  | 6 ~ 7                     | 2,400                                  | 12,000                                 | 8                         | 25                                |
| 6.3φ                 | 340×275×50              | 2,000               | 355×297×290                | 10,000                  | 8                         | 2,000                                  | 10,000                                 | 6                         | 20                                |
| 8φ×5~16L             | 340×230×50              | 1,000               | 355×252×290                | 5,000                   | 7                         | 1,600                                  | 8,000                                  | 12                        | 15                                |
| 8φ×20L               | 340×230×58              | 1,000               | 355×252×315                | 5,000                   | 7                         | 1,000                                  | 5,000                                  | 12                        | 15                                |
| 10φ×10~17L           | 340×230×50              | 600                 | 355×252×290                | 3,000                   | 7                         | -                                      | -                                      | -                         | 12                                |
| 10φ×20~25L           | 340×230×58              | 600                 | 355×252×315                | 3,000                   | 7                         | -                                      | -                                      | -                         | 12                                |
| 10φ×30L              | 340×230×65              | 600                 | 355×252×290                | 2,400                   | 7                         | -                                      | -                                      | -                         | 12                                |
| 12.5φ×32L below      | 315×275×65              | 400                 | 355×297×290                | 1,600                   | 5                         | -                                      | -                                      | -                         | 10                                |
| 12.5φ×36L above      | 315×275×74              | 400                 | 355×297×337                | 1,600                   | 5                         | -                                      | -                                      | -                         | 10                                |
| 16φ×32L below        | 315×275×65              | 300                 | 355×297×290                | 1,200                   | 5                         | -                                      | -                                      | -                         | 5                                 |
| 16φ×36L above        | 315×275×74              | 300                 | 355×297×337                | 1,200                   | 5                         | -                                      | -                                      | -                         | 5                                 |

Note : For 10φ Reel Tape : 备注：对于10φ圆盘式编带

| size 尺寸    | inner carton 内箱(pcs) | outer carton 外箱(pcs) |
|------------|----------------------|----------------------|
| 10φ×10~16L | 1,200                | 6,000                |
| 10φ×17~20L | 1,000                | 5,000                |

## IX. Others

- (1) All the Jamicon capacitors, which are authenticated by the SGS, and the test report shows that the inspection results of Hexavalent Chromium VI(Cr(VI)), Cadmium (Cd), Mercury (Hg), Lead (Pb), Polybrominated Biphenyls (PBBs),Polybrominated Diphenyl Ether (PBDEs) comply with the RoHS requirements.

凯美所有电容器经SGS认证测试报告中所检测的六价铬 (Cr<sup>6+</sup>)、镉(Cd)、汞 (Hg) 、铅(Pb) 、多溴联苯(PBBs)和多溴联苯醚(PBDEs)均符合RoHS要求。

- (2)Satisfied characteristic JIS C 5101. 符合JIS C 5101特性。

- (3)Aluminum Electrolytic Capacitors may be damaged by corrosion which is caused by any halogenated hydrocarbon solvents.

铝电解电容器可能会被卤化烃类溶剂导致的腐蚀而损坏。

Please let us know in advance the solvent name and conditions for your PCB cleaning

请让我们事先了解贵司印刷线路板使用的清洗剂的名称和清洗条件。

**X . Lead processing type and Taping 导针加工类型和贴品****Code S1: Standard Type 标准型**