


JAMICON

(PE18AA6) ELECTROLYTIC CAPACITOR SPECIFICATION

CUSTOMER		ROPLA			
CODE	YOUR			NO.	
	OUR	LSW223M1CO40M		DATE	24,AUG.2006
SERIES		LS	TYPE	W	POLARITY
RATED VALUE		22000 μ F	16 WV	SAFETY VENT	

LARGE TYPE

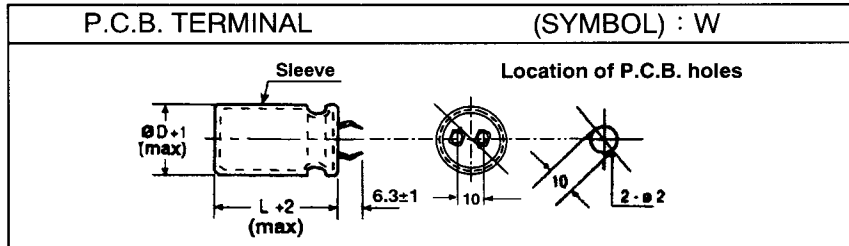

DIMENSION		(m/m)	
D	ϕ 25	L	40

VENT STYLES <input checked="" type="checkbox"/>	
V	CASE VENT
	RUBBER VENT

Item	Characteristics	
Operation temperature Range	- 40 °C	+ 85 °C
Capacitance Tolerance	- 20 %	+ 20 % (M)
Surge Voltage	20	VDC
Leakage Current	$I \leq$	3000 (μ A) 5 minutes
Dissipation Factor(tan δ)	\leq	0.50 (120Hz)
E.S.R.	<	0.038 (Ω) 120 Hz 20 °C
Ripple Current	<	4.04 (A) 120 Hz 85 °C
IMP.	<	— (Ω) 120 Hz 20 °C
Low Temperature Stability	Impedance Ratio At 120Hz	
	Z - 25 °C / Z + 20 °C	4 MAX
	Z - 40 °C / Z + 20 °C	15 MAX
Load Test	After 2000 Hrs At +85 °C	
	Capacitance Change	$\leq \pm 15$ % of initial value
	D.F. (tan δ)	≤ 175 % of initial specified value
	Leakage Current	\leq initial specified value
	Outlook	Should be without any change

Soldering	245 \pm 3 °C	Soldering must covered more than 95%
	3 \pm 0.5 sec	

TEST FREQ. : 120 Hz	TEST TEMP : 20 °C	REFERENCE STANDARD : JIS C5102
---------------------	-------------------	--------------------------------

KAIMEI ELECTRONIC CORP.

APPROVED BY

CHECKED BY

DESIGNED BY

