JAMICON

(PE10AA4) ELECTROLYTIC CAPACITOR SPECIFICATION

CUSTOMER		ROPLA		
CODE	YOUR			NO. T0603051-3
	OUR	SSR220M1HE07H		DATE 2006/3/29
LOT NO.				POLARITY
CASE SIZE		6.3 × 07		QUANTITY 0 PCS
SERIES	SSR	TYPE	R	SAFETY VENT
RATED VALUE		22 uF	50 v	

D	6.3 Φ	L'	≦L+1
D'	<D+0.5	F	2.5
d	0.45 Φ		

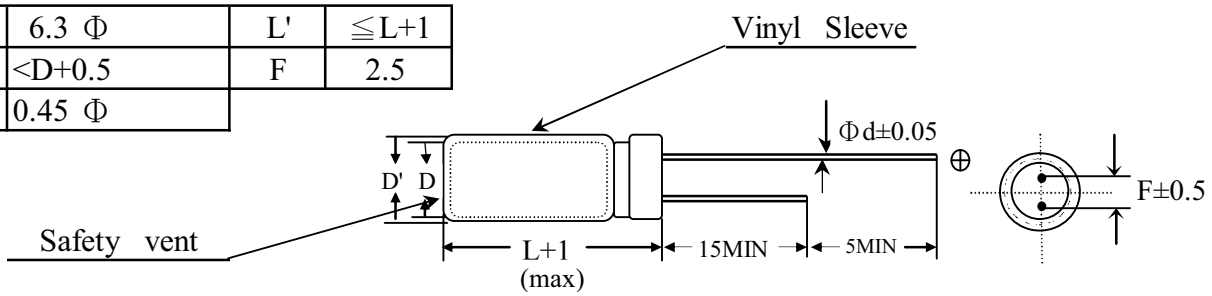

Item		Characteristices		
Operation temperature range		- 40 ℃ ～ + 85 ℃		
Capacitance Tolerance		- 20 % ～ + 20 %		
Surge Voltage		63 VDC		
Leakage Current		I≦ 11 (u A) Whichever is greater after 2 minutes		
Dissipation Factor		≦ 10 (%) 120Hz 20 ℃		
E.S.R.		< (Ω) 120Hz 20 ℃		
Ripple Current		< 70 (m A) 120Hz 85 ℃		
IMP.		< (Ω) 120Hz 20 ℃		
Low Temperature Stability		Impedance Ratio At 120Hz		
		Z-25℃ / Z+20℃	2 MAX	
		Z-40℃ / Z+20℃	3 MAX	
Load Test		After 1000 Hrs At 85 ℃		
		Capacitance Change	≦± 20 % of initial value	
		D.F.(tan δ)	≦ 200 % of initial specified value	
		Leakage Current	≦ initial specified value	
		Out Look	Should be without any change	
Teminal Strength	Pull Test	0.5 kg 10±1 sec		
	Bend Test	0.25 kg 2 cycle		
Soldering		240±2℃	Soldering must covered	
		3±0.5sec	more than 95%	
Storage Temperature		- 40 ℃ ～ + 85 ℃		

TEST FREQ.:120Hz	TEST TEMP:20℃	REFERENCE STANDARD: JIS C5102

	CHECKED	DESIGNED
SU ZHOU KAIMEI ELECTRONIC LTD.	課長 06.03.29 李奎	技術部 06.03.29 徐燕霞

SE410-28A

PDF 文件使用 "pdfFactory Pro" ?用版本?建 www.fineprint.cn