

1.5KE ***Series

GLASS PASSIVATED JUNCTION TRANSIENT VOLTAGE SUPPRESSOR

VOLTAGE - 6.8 TO 440 Volts

1500Watt Peak Power 6.5 Watt Steady State

Feature

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- * Glass passivated chip junction in DO-201 package
- * 1500W surge capability at 1ms
- * Excellent clamping capability
- * Low zener impedance
- * Fast response time: typically less than 1.0 ps from 0 volts to BV min
- * Typical IR less than 1μA above 10V
- * High temperature soldering guaranteed: 260 /10 seconds/.375", (9.5mm) lead length/5lbs., (2.3kg) tension

2.Mechanical Data

Case: JEDEC DO-201AD molded plastic

Terminals: Axial leads, solderable per MIL-STD-202, Method 208

Polarity: Color band denoted cathode except Bipolar

Mounting Position: Any

Weight: 0.04 ounce, 1.12 gram

DEVICES FOR BIPOLAR APPLICATIONS

For Bidirectional use C or CA Suffix for types 1.5KE6.8 thru types 1.5KE440


Electrical characteristics apply in both directions.

1.Electrical Characteristic

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

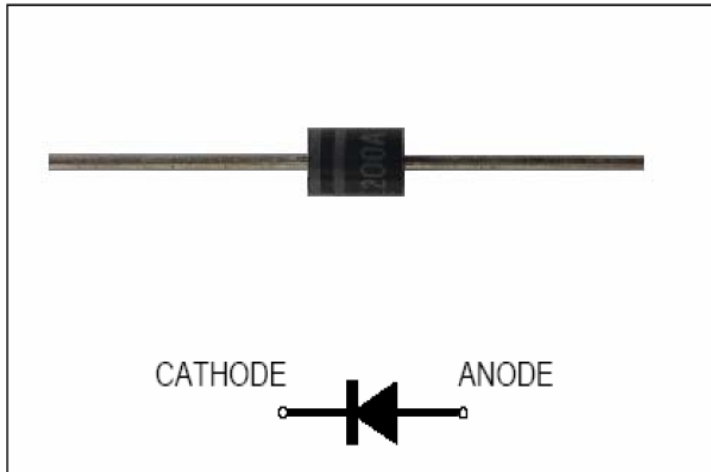

we declare that the material of product is halogen free (green epoxy compound).

RATING	SYMBOL	VALUE	UNITS
Peak Power Dissipation at $T_A=25^\circ\text{C}$, $T_P=1\text{ms}$ (Note 1)	P_{PPM}	Minimum 1500	Watts
Steady State Power Dissipation at $T_L=75^\circ\text{C}$ Lead Lengths .375", (9.5mm) (Note 2)	$P_{M(AV)}$	6.5	Watts
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load(JECED Method) (Note 3)	I_{FSM}	200	Amps
Operating and Storage Temperature Range	T_J, T_{STG}	-50 to +150	$^\circ\text{C}$

NOTES:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A=25^\circ\text{C}$ per Fig. 2.
2. Mounted on Copper Leaf area of 1.57in²(40mm²).
3. 8.3ms single half sine-wave, duty cycle= 4 pulses per minutes maximum.

1.5KE*** Series

UNI-DIRECTIONAL PART NUMBER	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRENT IT (mA)	MAXIMUM CLAMPING VOLTAGE @IPP VC (V)	REVERSE LEAKAGE @VRWM IR (uA)
P4KE6.8	5.5	6.12	7.48	10	10.8	1000
1.5KE6.8A	5.8	6.45	7.14	10	10.5	1000
1.5KE7.5	6.05	6.75	8.25	10	11.7	500
1.5KE7.5A	6.4	7.13	7.88	10	11.3	500
1.5KE8.2	6.63	7.38	9.02	10	12.5	200
1.5KE8.2A	7.02	7.79	8.61	10	12.1	200
1.5KE9.1	7.37	8.19	10	1	13.8	50
1.5KE9.1A	7.78	8.65	9.5	1	13.4	50
1.5KE10	8.1	9	11	1	15	10
1.5KE10A	8.55	9.5	10.5	1	14.5	10
1.5KE11	8.92	9.9	12.1	1	16.2	5
1.5KE11A	9.4	10.5	11.6	1	15.6	5
1.5KE12	9.72	10.8	13.2	1	17.3	5
1.5KE12A	10.2	11.4	12.6	1	16.7	5
1.5KE13	10.5	11.7	14.3	1	19	5
1.5KE13A	11.1	12.4	13.7	1	18.2	5
1.5KE15	12.1	13.5	16.5	1	22	5
1.5KE15A	12.8	14.3	15.8	1	21.2	5
1.5KE16	12.9	14.4	17.6	1	23.5	5
1.5KE16A	13.6	15.2	16.8	1	22.5	5
1.5KE18	14.5	16.2	19.8	1	26.5	5
1.5KE18A	15.3	17.1	18.9	1	25.2	5
1.5KE20	16.2	18	22	1	29.1	5
1.5KE20A	17.1	19	21	1	27.7	5
1.5KE22	17.8	19.8	24.2	1	31.9	5
1.5KE22A	18.8	20.9	23.1	1	30.6	5
1.5KE24	19.4	21.6	26.4	1	34.7	5
1.5KE24A	20.5	22.8	25.2	1	33.2	5
1.5KE27	21.8	24.3	29.7	1	39.1	5
1.5KE27A	23.1	25.7	28.4	1	37.5	5
1.5KE30	24.3	27	33	1	43.5	5
1.5KE30A	25.6	28.5	31.5	1	41.4	5
1.5KE33	26.8	29.7	36.3	1	47.7	5
1.5KE33A	28.2	31.4	34.7	1	45.7	5
1.5KE36	29.1	32.4	39.6	1	52	5
1.5KE36A	30.8	34.2	37.8	1	49.9	5
1.5KE39	31.6	35.1	42.9	1	56.4	5
1.5KE39A	33.3	37.1	41	1	53.9	5
1.5KE43	34.8	38.7	47.3	1	61.9	5
1.5KE43A	36.8	40.9	45.2	1	59.3	5
1.5KE47	38.1	42.3	51.7	1	67.8	5
1.5KE47A	40.2	44.7	49.4	1	64.8	5
1.5KE51	41.3	45.9	56.1	1	73.5	5
1.5KE51A	43.6	48.5	53.6	1	70.1	5
1.5KE56	45.6	50.4	61.6	1	80.5	5
1.5KE56A	47.8	53.2	58.8	1	77	5
1.5KE62	50.2	55.8	68.2	1	89	5
1.5KE62A	53	58.9	65.1	1	85	5
1.5KE68	55.1	61.2	74.8	1	98	5

1.5KE*** Series

UNI-DIRECTIONAL PART NUMBER	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRENT IT (mA)	MAXIMUM CLAMPING VOLTAGE @IPP VC (V)	REVERSE LEAKAGE @VRWM IR (uA)
1.5KE68A	58.1	64.6	71.4	1	92	5
1.5KE75	60.7	67.5	82.5	1	108	5
1.5KE75A	64.1	71.3	78.8	1	103	5
1.5KE82	66.4	73.8	90.2	1	118	5
1.5KE82A	70.1	77.9	86.1	1	113	5
1.5KE91	73.7	81.9	100	1	131	5
1.5KE91A	77.8	86.5	95.5	1	125	5
1.5KE100	81	90	110	1	144	5
1.5KE100A	85.5	95	105	1	137	5
1.5KE110	89.2	99	121	1	158	5
1.5KE110A	94	105	116	1	152	5
1.5KE120	97.2	108	132	1	173	5
1.5KE120A	102	114	126	1	165	5
1.5KE130	105	117	143	1	187	5
1.5KE130A	111	124	137	1	179	5
1.5KE150	121	135	165	1	215	5
1.5KE150A	128	143	158	1	207	5
1.5KE160	130	144	176	1	230	5
1.5KE160A	136	152	168	1	219	5
1.5KE170	138	153	187	1	244	5
1.5KE170A	145	162	179	1	234	5
1.5KE180	146	162	198	1	258	5
1.5KE180A	154	171	189	1	246	5
1.5KE200	162	180	220	1	287	5
1.5KE200A	171	190	210	1	274	5
1.5KE220	175	198	242	1	344	5
1.5KE220A	185	209	231	1	328	5
1.5KE250	202	225	275	1	360	5
1.5KE250A	214	237	263	1	344	5
1.5KE300	243	270	330	1	430	5
1.5KE300A	256	285	315	1	414	5
1.5KE350	284	315	385	1	504	5
1.5KE350A	300	332	368	1	482	5
1.5KE400	324	360	440	1	574	5
1.5KE400A	342	380	420	1	548	5
1.5KE440	356	396	484	1	631	5
1.5KE440A	376	418	462	1	600	5

NOTES:

1. Non-repetitive current pulse, per Fig. 3 and derated above TA=25°C per Fig. 2.
2. Mounted on Copper Leaf area of 1.57in²(40mm²).
3. 8.3ms single half sine-wave, duty cycle= 4 pulses per minutes maximum.

1.5KE ***Series

2. Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1-Peak Pulse Power Rating Curve

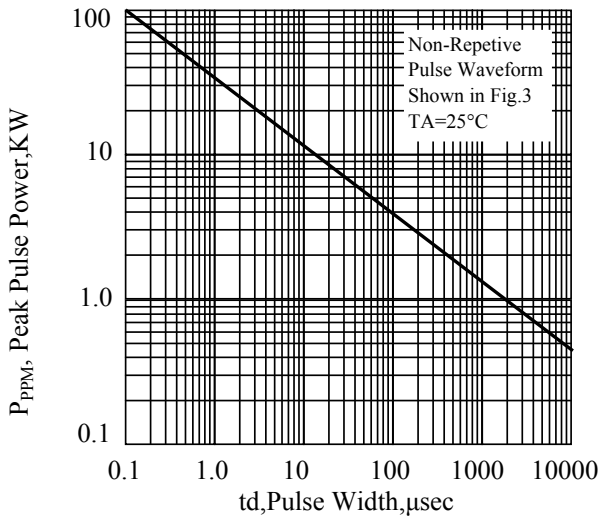


Fig. 2-Pulse Derating Curve

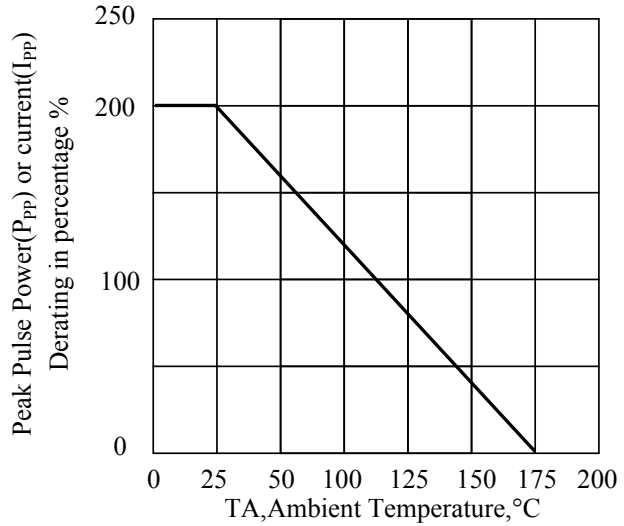


Fig. 3-Pulse Waveform

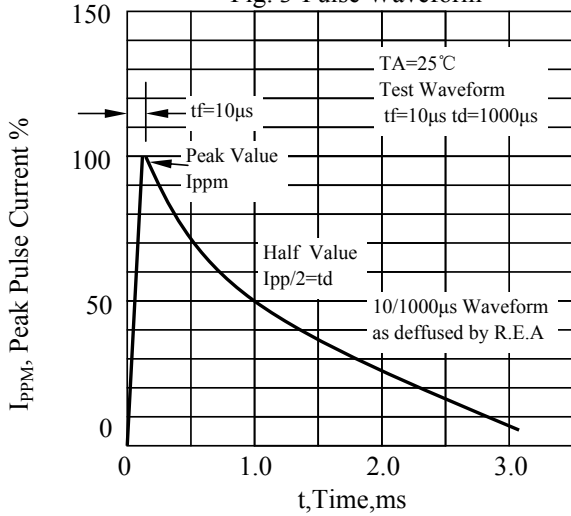


Fig. 4-Typical Junction Capacitance Unidirectional

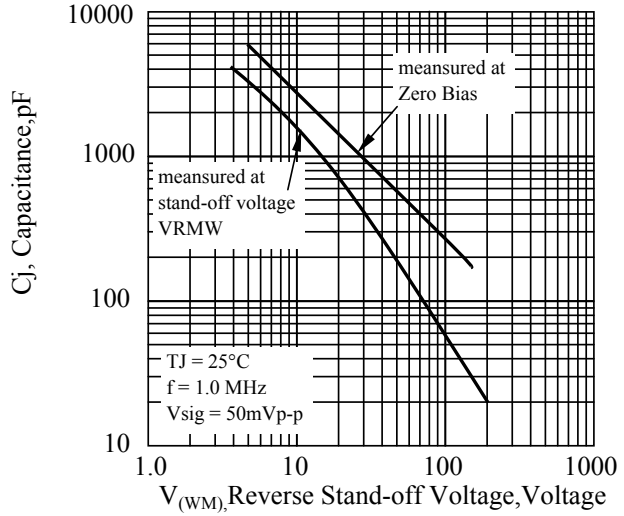


Fig. 5-Steady State Power Derating Curve



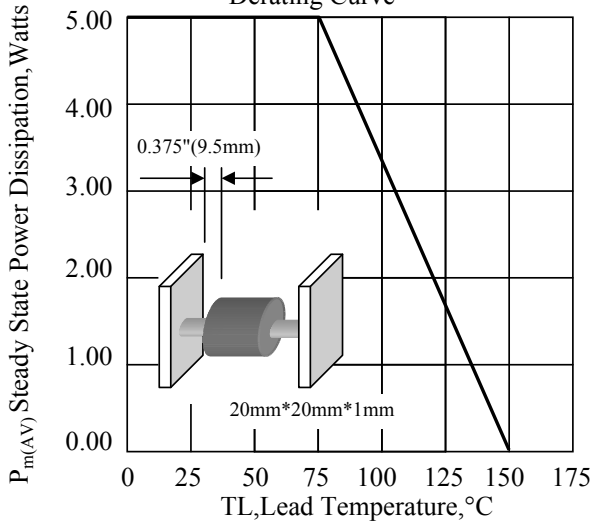


Fig. 6-Maximum Non-Repetitive Peak Forward Surge Current Unidirectional

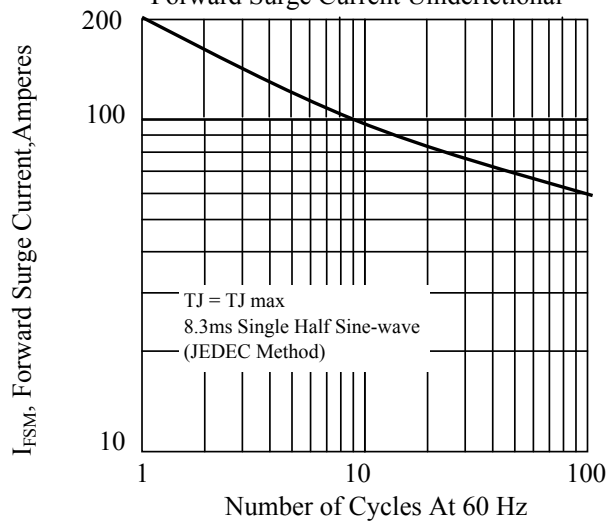

1.5KE ***Series

3. dimension:

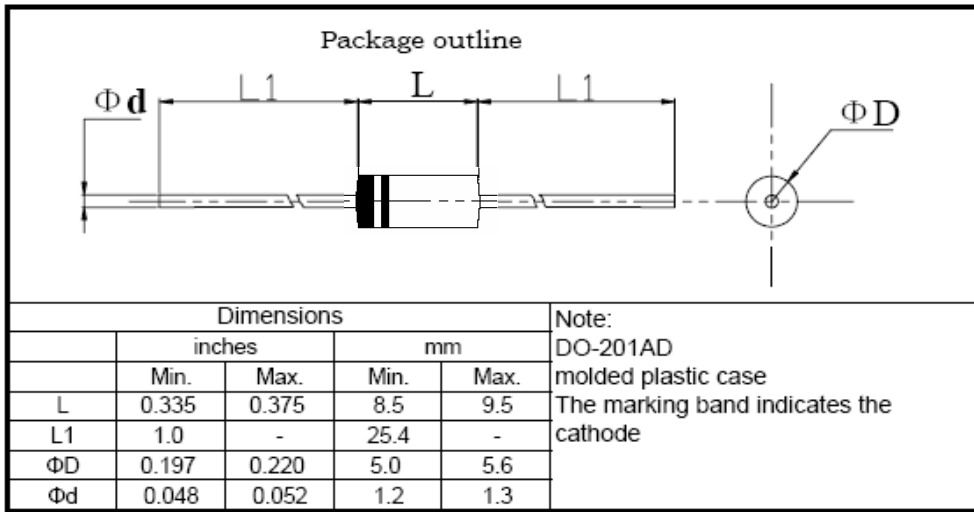

1.5KE ***Series

4. Update Record

版次	更新记录	更新作者	更新日期
1	第一版	周杰	2010-5-4
2	调整储存温度为175度	周杰	2010-9-23