
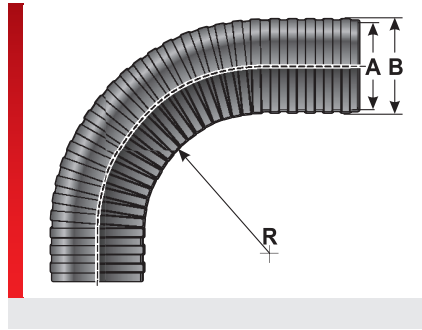


Typ EW-R-PP-LS

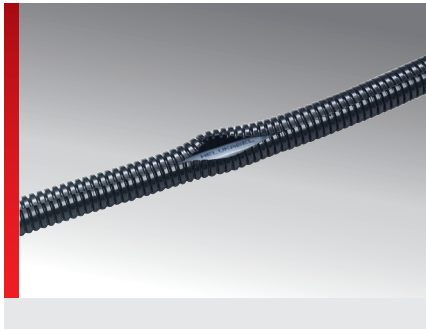

Cable protection conduit open

PRODUCT INFORMATION

- simple, lightweight version - for the installation of pre-assembled cables
- flexible conduit for simple dynamic applications
- medium mechanical load
- resource-saving through recycled material
- for mechanical engineering and chemical plants

SPECIFICATIONS

- Polypropylene (PP)
- According to IEC EN 61386
Cycles: > 1000000 ~
- 40 – 130 °C
- acc. to UL94 HB

HF
 UV
 RoHS
 Made in Germany

Type	Order No.	Colour	A Ø mm	B Ø mm	R stat. mm	R dyn. mm	Weight kg/100m	MOQ m
Standard corrugation								
EW-R-PP 06-LS	83201402	Black	6.40	9.80	14.00	60.00	1.50	100
EW-R-PP M10/P07-LS	83201406	Black	8.30	11.50	21.00	70.00	1.60	100
EW-R-PP M12/P09-LS	83201408	Black	9.90	12.90	26.00	80.00	2.00	100
EW-R-PP M16/P11-LS	83201410	Black	12.10	15.70	33.00	100.00	2.80	100
EW-R-PP M20/P16-LS	83201416	Black	15.60	21.00	46.00	180.00	4.20	100
EW-R-PP M25/P21-LS	83201420	Black	22.30	28.30	59.00	230.00	7.00	100
EW-R-PP M32/P29-LS	83201426	Black	28.00	34.30	70.00	280.00	9.00	50
EW-R-PP M40/P36-LS	83201430	Black	34.90	42.10	86.00	310.00	12.50	25
EW-R-PP M50/P48-LS	83201434	Black	46.90	54.00	107.00	350.00	16.00	25

MATERIAL PROPERTIES

- Polypropylene (PP)
- Flexural fatigue strength**
Cycles: > 1000000 ~; Testing method: According to IEC EN 61386; Test value: M25/P21

THERMAL PROPERTIES

- Temperature / temperature range**
-40 – 130 °C

FIRE PROPERTIES

- Fire classification**
acc. to UL94 HB

Typ EW-R-PP-LS

TECHNICAL INFORMATION



Halogen-free



UV-resistant acc. to ISO 4892-2

Wir empfehlen die Farbe Schwarz

CONFORMITY



RoHS (EC Directive 2011/65/EU)



Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.