

# cablequick® Type 149 (149x339 mm)

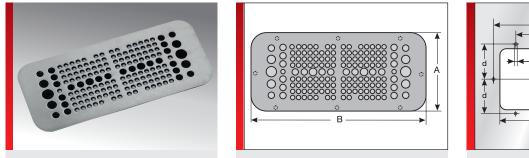



# **PRODUCT INFORMATION**

Efficient connection technology for terminal boxes, control cabinets for tool-free introduction of actuators, sensors, measuring and control instrumentation, optoelectronic, pneumatic lines and drive technology into a control panel. KDPs of product group 149 can be fitted directly into the standard cutouts of Rittal cabinets. The stainless steel version is particularly suitable for applications in the food and chemical industry. Integrated threaded bolts mean that no screws are visible from outside. Mounting set included in delivery.

V4A : 1.4571 ALU : 3.3535 ST : 1.0037 Rittal cut-out 4

# **SPECIFICATIONS**



Гуре	Order No.	Colour	No. Openings	Openings No. Ø mm	Pack qty.
KDP 149/158, Alu	87663089	RAL 7035	158	126x 3.50 – 6.20	1
				24x 6.00 - 10.00	
				6x 8.00 - 12.00	
				2x 12.00 – 18.00	
KDP 149/56, Alu	87663097	RAL 7035	56	36x 6.00 - 10.00	1
				8x 9.00 – 14.00	
				8x 14.00 – 18.00	
				4x 18.00 – 25.00	
KDP 149/78 ST <sup>1)</sup>	87663771	RAL 7035	78	30x 3.50 - 6.50	1
				40x 6.00 - 10.00	
				4x 11.00 – 16.00	
				2x 12.00 – 18.00	
				2x 18.00 – 25.00	
KDP 149/56 V4A	87663086	Smoothed	56	36x 6.00 - 10.00	1
				8x 9.00 - 14.00	
				8x 14.00 – 18.00	
				4x 18.00 – 25.00	
KDP 149/158 V4A	87663068	Smoothed	158	126x 3.50 - 6.20	1
				24x 6.00 - 10.00	
				6x 8.00 – 12.00	
				2x 12.00 – 18.00	



# cablequick® Type 149 (149x339 mm)

# Cable entry plate, type KDP metal cablequick®, rectangular

**DIMENSION TABLE** 

Туре	Order No.	A mm	B mm	a mm	b mm	c mm	d mm	e mm	g mm
KDP 149/158, Alu	87663089	149.00	339.00	303.00	115.00	161.50	66.50	5.00	120.00
KDP 149/56, Alu	87663097	149.00	339.00	303.00	115.00	161.50	66.50	5.00	120.00
KDP 149/78 ST <sup>1)</sup>	87663771	149.00	339.00	303.00	115.00	161.50	66.50	5.00	120.00
KDP 149/56 V4A	87663086	149.00	339.00	303.00	115.00	161.50	66.50	5.00	120.00
KDP 149/158 V4A	87663068	149.00	339.00	303.00	115.00	161.50	66.50	5.00	120.00

<sup>1)</sup> no UR approval

## **MATERIAL PROPERTIES**



## **MECHANICAL PROPERTIES**

IP Protection class

**Temperature / temperature range** -30 – 90 °C

### **APPROVALS AND OPERATING PERMITS**



CSA approval



## CONFORMITY



RoHS (EC Directive 202/95/EC)



cablequick® Type 149 (149x339 mm)

All details given in our sales material prospectuses and catalogues as well as the information available online are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID\_57906~20160420~890287~kdh\_kdp\_m\_149\_339