
Type MSV (plug-in fitting)

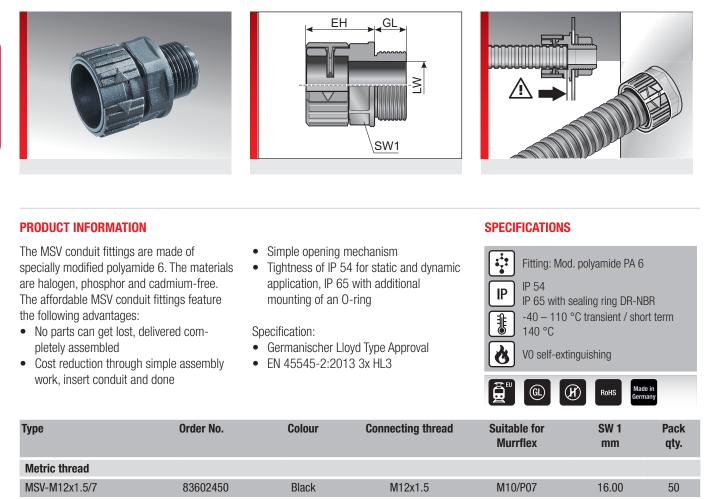

MATERIAL PROPERTIES

Fitting: Mod. polyamide PA 6

MECHANICAL PROPERTIES

Protection class IP 54 IP 65 with sealing ring DR-NBR

THERMAL PROPERTIES

4

IP

Temperature / temperature range -40 – 110 °C transient / short term 140 °C

FIRE BEHAVIOUR



Fire classification V0 self-extinguishing

Fire properties as per EN 45545-2: 2009 C.I.T. R22 / R23 HL3 = 0,43 LOI R22 / R23 HL3 = 33,8 % Ds (max.) R23 HL3 63



Type MSV (plug-in fitting)

APPROVALS AND OPERATING PERMITS



(GL)

GL approval

Railway EU approval

TECHNICAL INFORMATION

Halogen-free

CONFORMITY

RoHS RoHS (EC Directive 202/95/EC)

GENERAL INFORMATION

Made in Germany Made in Germany

All details given in our sales material prospectuses and catalogues as well as the information available online are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.