


DATE OF ISSUE	SPECIFICATIONS	

3. Shape, Dimensions & Marking

Unit : mm

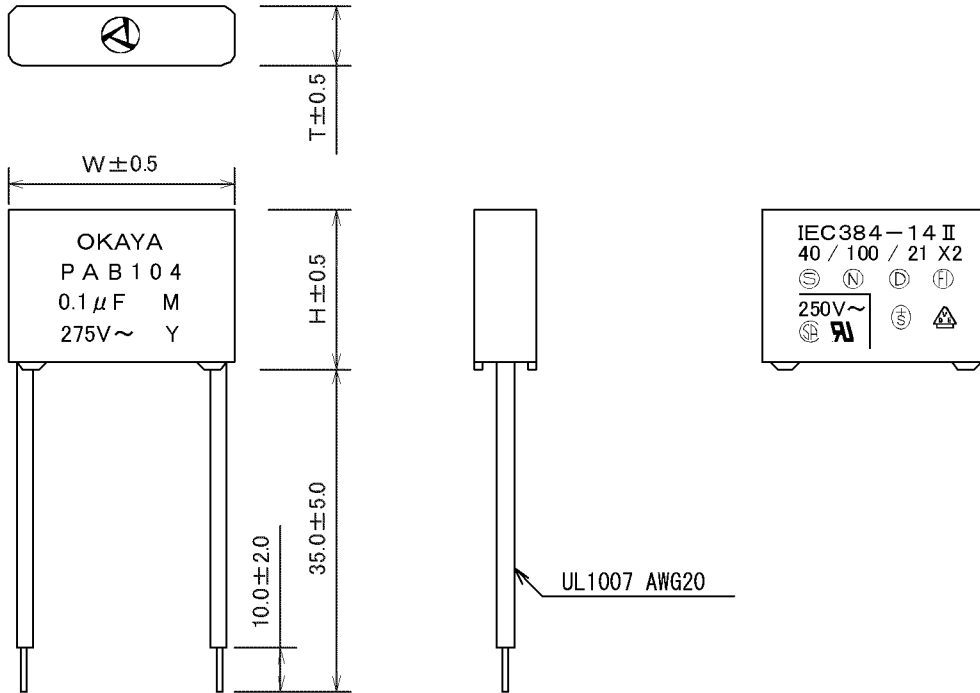

Model No.	W	H	T
PAB104-35F	17.0	15.0	8.0

4. Rating (Ambient Temperature 20°C)

- 4.1 Rated voltage : 275Vac 50/60Hz (UL/CSA 250Vac)
- 4.2 Nominal capacitance : 0.10 μ F
- 4.3 Tolerance of capacitance : $\pm 20\%$
- 4.4 Dissipation factor : 0.01 Max. at 1kHz
- 4.5 Test voltage
 - Between terminals : 1250Vac 50/60Hz 60sec
 - Both terminal to case : 2100Vac 50/60Hz 60sec
- 4.6 Insulation resistance
 - Between terminals : 15000M Ω Min. at 100Vdc
 - Both terminal to case : 100000M Ω at 100Vdc
- 4.7 Operating temperature : -40 ~ +100 °C

OKAYA ELECTRIC
INDUSTRIES CO.,LTD.