


Manganese Lithium Coin Batteries (ML series): Individual Specifications

ML614

□ Dimensions(mm)

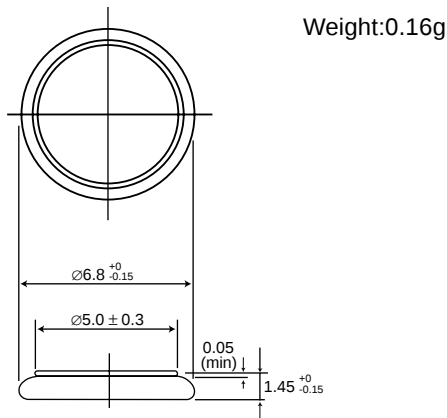


Note: This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.


□ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	3.4
Continuous standard load (mA)	0.01
Operating temperature (C)	-20 ~ +60

□ Discharge characteristics

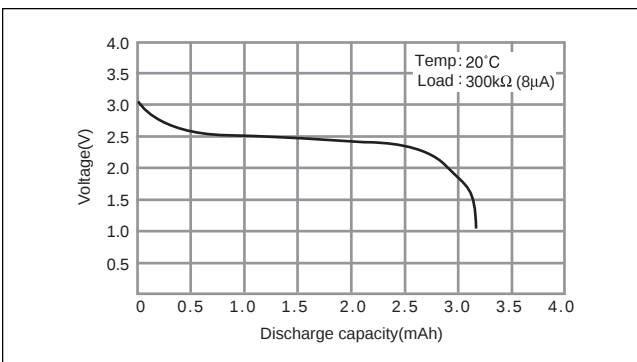


□ Consumption current vs. Duration time

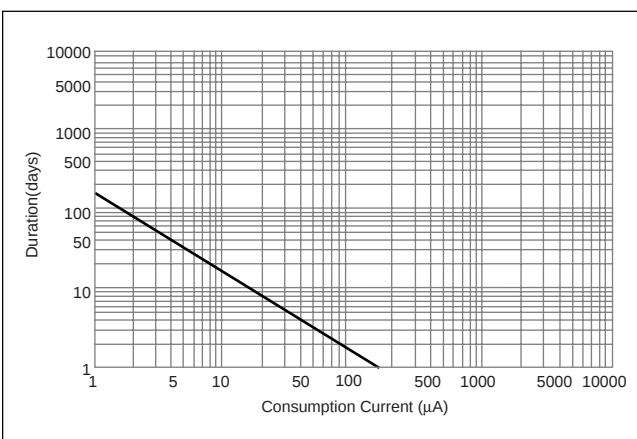

ML621

□ Dimensions(mm)

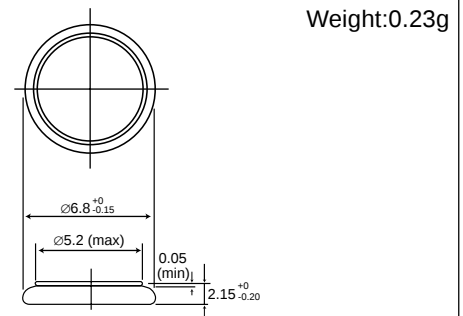


Note: This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.


□ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	5
Continuous standard load (mA)	0.01
Operating temperature (C)	-20 ~ +60

□ Discharge characteristics

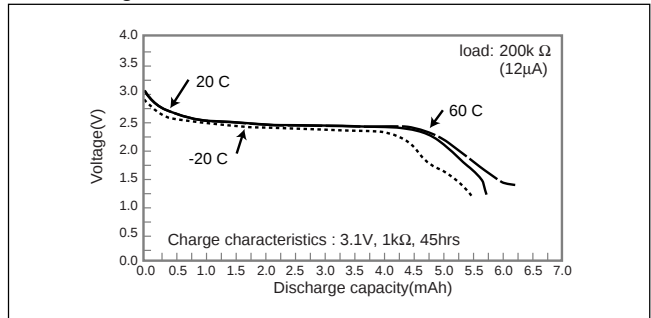

□ Charge characteristics

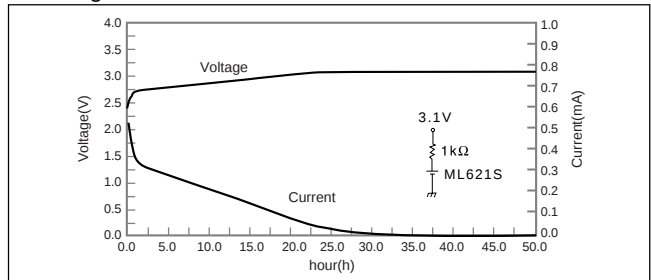

□ Consumption current vs. Duration time

