






Product Approval Sheet

Customer : Ropla

Issued no : 2019.07.25

Revision no : 0

- Product description : Metallized Polypropylene film capacitors(dc-link application)
- Product code : P246L45605JA01
- Application :

CUSTOMER			
PILKOR	Checked	Confirmed	Approved
			
	담당자	품질보증	연구소장

Contact point	e-mail address	Telephone
Sales – I.Y. So	iyso@pilkor.co.kr	031) 546-5111
QA – J.H. Lee	leejh@pilkor.co.kr	031) 546-5140

Headquarters : 381, Woncheon-dong, Yeong tong-gu, Suwon-si, Gyeonggi-do, Korea

PILKOR Electronics Division (of COWELL Fashion Co., Ltd.)

TEL. +82-31-217-2500

FAX. +82-31-217-7465

China factory : No 25 Zoutai South Road Rongcheng City, Shandong Province China

Rongcheng PILKOR Electronics Co., Ltd.

TEL. +86-631-755-6001~3

FAX, +86-631-755-6004

* Please returned to us this sheet before the order.

목 차 (Contents)

1. 일 반 (General)	Page 2
2. 특 성 곡 선 (Characteristics)	Page 8
3. 인 쇄 및 포 장 (Mark & Packing)	Page 11
4. 신 뢰 성 시 험 (Test Requirements)	Page 12

*원자재(Material) LIST

*Soldering guidelines

TYPE SPECIFICATION


PILKOR ELECTRONICS DIVISION

REVISION RECORD

Date	Change description
19-07-25	New registration

Metallized Polypropylene Film Capacitors (DC-link application)

PCPW246



$dt = 0.8 \pm 0.08 \text{mm}$

Voltage (Vdc)	Cap. (uF)	Code P246	C-tol.	Dimensions $b \times h \times l (\pm 1.0)$ (mm)	P (mm)	Lt (mm)
450V	6	L45605JA01	$\pm 5 \%$	13.0 x 23.0 x 31.0	27.5 ± 0.5	25.0 ± 1.0

SAME AS P246L45605JAS2

< BUT >

- Lead length(Lt) : $25.0 \pm 1.0 \text{mm}$
- Packing method : Loose in box

- Electrical property

V_R (V)	Cap. at 1KHz (uF)	dv/dt (V/us)	l _{pk} (A)	I _{rms} at 10KHz (A)	ESR at 10KHz (mΩ)	TanD at 1KHz ($\times 10^{-4}$)	TanD at 10KHz ($\times 10^{-4}$)	IR 500V 1min (GΩ)
450	6	30	180	6.5	8.5	≤ 10	≤ 85	≥ 1.67

- Packing Method (Loose in box)


Packing method			SPQ (Inner box)	PQ (Outer box)	
8242 450 40026			250 (8242 451 30211)	1,000 (8242 451 30301)	
● INNER BOX (SPQ)			● OUTER BOX (PQ)		
<p>* SPQ Box 4ea in PQ box</p>					
SPQ Dimensions(mm)			PQ Dimensions(mm)		
W	H	T	W	H	T
210	210	140	430	430	160

Metallized Polypropylene Film Capacitors (DC-link application)

PCPW246

CONSTRUCTION

- Dielectric : Metallized Polypropylene film
with segmented pattern
- Case : PBT (UL94 V-0)
- Filling : Epoxy resin (UL94 V-0)
- Terminals : Tinned copper wire (2-pin / 4-pin)

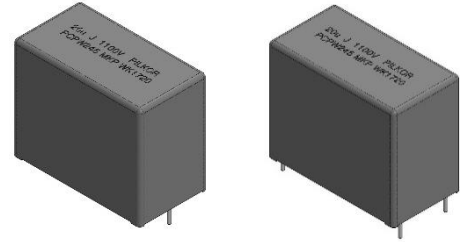

FEATURE

- High capacitance density dc-link capacitor
- High safety, Self-healing and self-protecting function built in
- Low loss, Low ESR
- Long product life, high reliability
- Stable capacitance at THB conditions

APPLICATION

- For DC filtering, dc-link circuit
- HEV, EV (power train, OBC etc.)
- Renewable energies inverters
- Industrial power supplies
- Inverter circuit in appliances (air conditioner etc.)
- Motor drive

QUICK REFERENCE DATA

Capacitance range	1.5 μ F to 150 μ F
Capacitance tolerance	\pm 5%
Rated voltage (V_{Rdc} at 85 $^{\circ}$ C)	450Vdc to 1100Vdc
IEC Climatic category	40 / 105 / 56
Rated temperature	85 $^{\circ}$ C
Maximum permissible case temperature	105 $^{\circ}$ C (observing voltage derating)
Insulation resistance (IR)	IRx $C \geq 10,000$ s at 100(500)V $_{dc}$, 1min For < 500V $_{dc}$, measuring voltage 100V $_{dc}$ For ≥ 500 V $_{dc}$, measuring voltage 500V $_{dc}$
Withstanding voltage between terminals	1.5 x V_{Rdc} applied for 10s
Withstanding voltage between terminals and case	2KV $_{AC}$ 50-60Hz applied for 60s
Life time expectancy	100,000 hours at V_R , 70 $^{\circ}$ C 40,000 hours at V_R , 85 $^{\circ}$ C
Reference	IEC 61071, IEC 60068


- Please refer to caution and warning at <http://www.pilkor.co.kr/download/Introductions.pdf> before using these products.

DC VOLTAGE DERATINGS

V_{Rdc} at 85 $^{\circ}$ C	450V	700V	900V	1100V			
V_{OPdc} at 70 $^{\circ}$ C	500V	840V	1080V	1320V			
V_{OPdc} at 105 $^{\circ}$ C	300V	490V	630V	770V			

Metallized Polypropylene Film Capacitors (DC-link application)

ORDERING INFORMATION

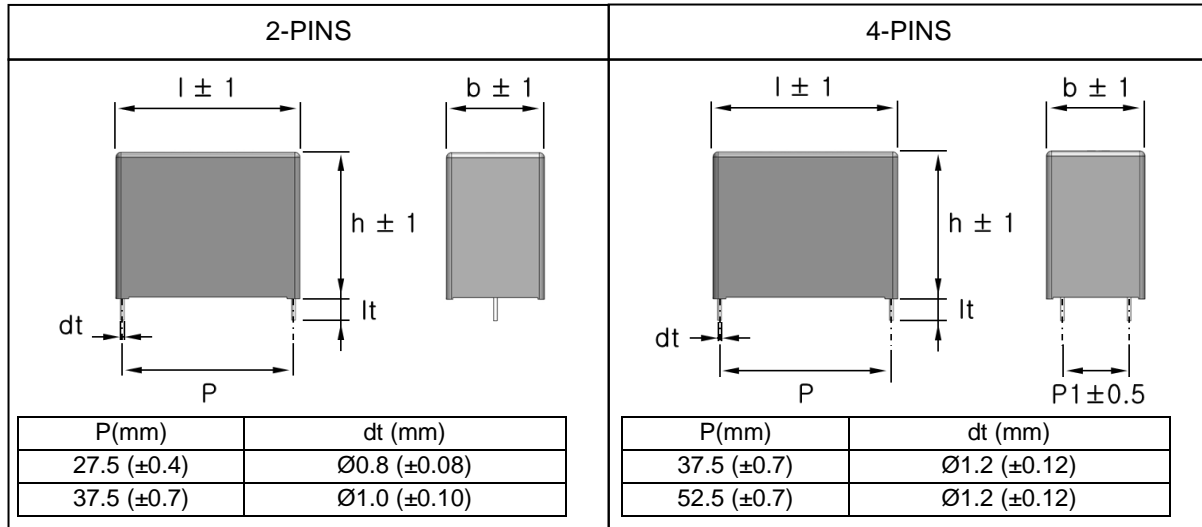

1	2	3	4	5	6	7	8	9	10	11	12	13	14
P	2	4	6	Q	7	0	3	0	6	J	A	S	4

Digits 1~4	
Code	Series name
P246	PCPW246

Digits 5	
Code	Pitch
L	27.5 mm
Q	37.5 mm
T	52.5 mm

Digits 6~7	
Code	Voltage
45	450V
70	700V
90	900V
11	1100V

Digits 8~10	
Code	Capacitance
105	1uF
106	10uF
107	100uF

Digits 11	
Code	Cap. tolerance
J	5%

Digits 12	
Code	Revision
A	Standard
M	Automotive
L	Low profile

Digits 13	
Code	Lead length
L	25.0 \pm 1.0
S	5.0 \pm 1.0
F	4.0 \pm 0.5
8	3.8 \pm 0.5
7	3.7 \pm 0.5
5	3.5 \pm 0.5
4	3.4 \pm 0.5
2	3.2 \pm 0.5
T	3.0 \pm 0.5

Digits 14		
Code	Lead type	Packing
2	2-PIN	Arrange
4	4-PIN	Arrange

* For product with dt= $\varnothing 0.8$, tolerance ± 0.3

ELECTRICAL DATA AND ORDERING CODE

$V_{Rdc} = 450Vdc$ at 85°C (500Vdc at 70°C)

CAP. (μF)	Dimension (mm)			P (mm)	P1 (mm)	dv/dt (V/us)	I _{pk} (A)	I _{rms} ⁽¹⁾ (A)		ESR ⁽²⁾ (m Ω)		TanD ⁽³⁾ ($\times 10^{-4}$)		Ordering Code
	b	h	l					2P	4P	2P	4P	2P	4P	
4	11	21	31	27.5	-	30	120	4.7	-	12.3	-	85	-	P246L45405JA**
5	13	23	31	27.5	-	30	150	5.6	-	9.9	-	85	-	P246L45505JA**
6	15	25	31	27.5	-	30	180	6.5	-	8.5	-	85	-	P246L45605JA**
7	15	25	31	27.5	-	30	210	6.9	-	7.5	-	85	-	P246L45705JA**
8	15	25	31	27.5	-	30	240	7.4	-	6.6	-	85	-	P246L45805JA**
9	17	27	31	27.5	-	30	270	8.2	-	6.0	-	85	-	P246L45905JA**
10	18	28	31	27.5	-	30	300	8.8	-	5.5	-	85	-	P246L45106JA**
15	21	31	31	27.5	-	30	450	10.8	-	4.3	-	85	-	P246L45156JA**
20	22	37	31	27.5	-	30	600	12.9	-	3.4	-	85	-	P246L45206JA**
20	18	33	42	37.5	-	21	420	10.0	-	6.0	-	160	140	P246Q45206JA**
22	20	35	42	37.5	10.2	21	462	10.2	11.4	5.6	5.1	160	140	P246Q45226JA**
25	20	35	42	37.5	10.2	21	525	10.8	12.0	5.0	4.5	160	140	P246Q45256JA**
30	24	39	42	37.5	10.2	21	630	12.8	14.2	4.2	3.8	160	140	P246Q45306JA**
35	24	39	42	37.5	10.2	21	735	13.6	15.1	3.7	3.4	160	140	P246Q45356JA**
40	28	43	42	37.5	10.2	21	840	15.6	17.3	3.3	3.0	160	140	P246Q45406JA**
45	28	43	42	37.5	10.2	21	945	16.4	18.2	3.0	2.7	160	140	P246Q45456JA**
50	30	45	42	37.5	20.3	21	1050	17.8	19.8	2.7	2.5	160	140	P246Q45506JA**
55	30	51	42	37.5	20.3	21	1155	18.5	20.6	2.5	2.3	160	140	P246Q45556JA**
60	30	51	42	37.5	20.3	21	1260	20.1	22.3	2.3	2.1	160	140	P246Q45606JA**
60	30	45	57	52.5	20.3	14	840	-	19.2	-	3.2	-	250	P246T45606JA**
75	30	45	57	52.5	20.3	14	1050	-	21.2	-	2.6	-	250	P246T45756JA**
100	35	50	57	52.5	20.3	14	1400	-	25.9	-	2.0	-	250	P246T45107JA**
110	35	50	57	52.5	20.3	14	1540	-	27.0	-	1.9	-	250	P246T45117JA**
120	40	53	57	52.5	20.3	14	1680	-	29.6	-	1.8	-	250	P246T45127JA**
130	40	53	57	52.5	20.3	14	1820	-	30.5	-	1.7	-	300	P246T45137JA**
140	45	55	57	52.5	20.3	14	1960	-	32.5	-	1.6	-	300	P246T45147JA**
150	45	55	57	52.5	20.3	14	2100	-	33.1	-	1.6	-	300	P246T45157JA**

(1) Maximum RMS current at +70°C, 10KHz, $\Delta T = +15^\circ C$ (Hot spot temp. = $T_{amb} + \Delta T = 70^\circ C + 15^\circ C = 85^\circ C$)

(2) Typical ESR values at 10KHz, 20°C
(Maximum ESR value : less than 2.5 x typical ESR value)

(3) Maximum TanD value at 10KHz, 20°C

Capacitance	TanD ($\times 10^{-4}$) at 1KHz
P=27.5mm	≤ 10
C \leq 30 μF	≤ 15
C > 30 μF	≤ 20
C \geq 100 μF	≤ 30

Metallized Polypropylene Film Capacitors (DC-link application)

PCPW246

 $V_{Rdc} = 700Vdc$ at 85°C (800Vdc at 70°C)

CAP. (μF)	Dimension (mm)			P (mm)	P1 (mm)	dv/dt (V/us)	Ipk (A)	I _{rms} ⁽¹⁾ (A)		ESR ⁽²⁾ (m Ω)		TanD ⁽³⁾ ($\times 10^{-4}$)		Ordering Code
	b	h	l					2P	4P	2P	4P	2P	4P	
2	11	21	31	27.5	-	40	80	3.7	-	19.9	-	65	-	P246L70205JA**
3	13	23	31	27.5	-	40	120	4.9	-	13.3	-	65	-	P246L70305JA**
4	15	25	31	27.5	-	40	160	6.0	-	9.9	-	65	-	P246L70405JA**
5	17	27	31	27.5	-	40	200	7.0	-	8.3	-	65	-	P246L70505JA**
6	18	28	31	27.5	-	40	240	7.9	-	6.9	-	65	-	P246L70605JA**
7	19	29	31	27.5	-	40	280	8.7	-	5.9	-	65	-	P246L70705JA**
8	21	31	31	27.5	-	40	320	10.1	-	4.9	-	65	-	P246L70805JA**
9	21	31	31	27.5	-	40	360	10.4	-	4.6	-	65	-	P246L70905JA**
10	22	37	31	27.5	-	40	100	11.8	-	4.1	-	65	-	P246L70106JA**
10	18	33	42	37.5	-	22	220	9.2	-	7.1	-	110	-	P246Q70106JA**
12	20	35	42	37.5	10.2	22	264	10.0	11.1	5.8	5.3	110	95	P246Q70126JA**
15	24	39	42	37.5	10.2	22	330	12.0	13.3	4.8	4.4	110	95	P246Q70156JA**
20	24	44	42	37.5	10.2	22	440	13.8	15.4	3.6	3.3	110	95	P246Q70206JA**
22	28	43	42	37.5	10.2	22	484	15.4	17.1	3.3	3.0	110	95	P246Q70226JA**
25	28	43	42	37.5	10.2	22	550	16.4	18.3	2.9	2.7	110	95	P246Q70256JA**
30	30	51	42	37.5	20.3	22	660	18.3	20.3	2.5	2.3	110	95	P246Q70306JA**
35	30	51	42	37.5	20.3	22	726	20.5	22.8	2.2	2.0	110	95	P246Q70356JA**
40	30	45	57	52.5	20.3	15	600	-	17.0	-	4.1	-	220	P246T70406JA**
50	35	50	57	52.5	20.3	15	750	-	20.0	-	3.4	-	220	P246T70506JA**
60	35	50	57	52.5	20.3	15	925	-	21.5	-	3.0	-	220	P246T70606JA**
70	40	53	57	52.5	20.3	15	1050	-	23.9	-	2.7	-	250	P246T70706JA**
80	45	55	57	52.5	20.3	15	1200	-	26.3	-	2.4	-	250	P246T70806JA**
90	45	65	57	52.5	20.3	15	1350	-	29.0	-	2.2	-	250	P246T70906JA**
100	45	65	57	52.5	20.3	15	1500	-	30.9	-	2.0	-	250	P246T70107JA**

(1) Maximum RMS current at +70°C, 10KHz, $\Delta T = +15^\circ C$ (Hot spot temp. = $T_{amb} + \Delta T = 70^\circ C + 15^\circ C = 85^\circ C$)

(2) Typical ESR values at 10KHz, 20°C
(Maximum ESR value : less than 2.5 x typical ESR value)

(3) Maximum TanD value at 10KHz, 20°C

Capacitance	TanD ($\times 10^{-4}$) at 1KHz
P=27.5mm	≤ 10
C $\leq 30\mu F$	≤ 15
C > 30 μF	≤ 20
C $\geq 100\mu F$	≤ 30

Metallized Polypropylene Film Capacitors (DC-link application)

PCPW246

 $V_{Rdc} = 900Vdc$ at 85°C (1100Vdc at 70°C)

CAP. (μF)	Dimension (mm)			P (mm)	P1 (mm)	dv/dt (V/us)	Ipk (A)	I _{rms} ⁽¹⁾ (A)		ESR ⁽²⁾ (m Ω)		TanD ⁽³⁾ ($\times 10^{-4}$)		Ordering Code
	b	h	l					2P	4P	2P	4P	2P	4P	
1	11	21	31	27.5	-	75	75	3.1	-	28.6	-	50	-	P246L90105JA**
2	13	23	31	27.5	-	75	150	4.7	-	14.5	-	50	-	P246L90205JA**
3	15	25	31	27.5	-	75	225	6.1	-	9.8	-	50	-	P246L90305JA**
4	18	28	31	27.5	-	75	300	7.6	-	7.4	-	50	-	P246L90405JA**
5	19	29	31	27.5	-	75	375	8.7	-	6.0	-	50	-	P246L90505JA**
6	21	31	31	27.5	-	75	450	9.9	-	5.1	-	50	-	P246L90605JA**
7	22	37	31	27.5	-	75	525	11.4	-	4.4	-	50	-	P246L90705JA**
8	20	35	42	37.5	10.2	54	432	10.6	11.8	5.8	5.2	90	80	P246Q90805JA**
10	24	39	42	37.5	10.2	54	540	11.5	12.8	5.2	4.7	90	80	P246Q90106JA**
12	24	39	42	37.5	10.2	54	648	12.1	13.5	4.7	4.2	90	80	P246Q90126JA**
15	28	43	42	37.5	10.2	54	810	14.1	15.7	4.0	3.6	90	80	P246Q90156JA**
18	30	45	42	37.5	20.3	54	972	15.6	17.3	3.5	3.2	90	80	P246Q90186JA**
20	30	45	42	37.5	20.3	54	1080	16.4	18.2	3.3	3.0	90	80	P246Q90206JA**
22	30	51	42	37.5	20.3	54	1188	17.1	19.0	3.2	2.9	90	80	P246Q90226JA**
25	30	45	57	52.5	20.3	35	875	-	16.9	-	4.1	-	140	P246T90256JA**
30	35	50	57	52.5	20.3	35	1050	-	19.9	-	3.5	-	140	P246T90306JA**
35	35	50	57	52.5	20.3	35	1225	-	21.1	-	3.1	-	140	P246T90356JA**
40	40	53	57	52.5	20.3	35	1400	-	23.5	-	2.8	-	140	P246T90406JA**
45	40	53	57	52.5	20.3	35	1575	-	24.5	-	2.5	-	160	P246T90456JA**
50	45	55	57	52.5	20.3	35	1750	-	26.9	-	2.3	-	160	P246T90506JA**
55	45	65	57	52.5	20.3	35	1925	-	29.6	-	2.1	-	160	P246T90556JA**
60	45	65	57	52.5	20.3	35	2100	-	30.8	-	2.0	-	160	P246T90606JA**

⁽¹⁾ Maximum RMS current at +70°C, 10KHz, $\Delta T = +15^\circ C$ (Hot spot temp. = $T_{amb} + \Delta T = 70^\circ C + 15^\circ C = 85^\circ C$)

⁽²⁾ Typical ESR values at 10KHz, 20°C
(Maximum ESR value : less than 2.5 x typical ESR value)

⁽³⁾ Maximum TanD value at 10KHz, 20°C

Capacitance	TanD ($\times 10^{-4}$) at 1KHz
P=27.5mm	≤ 10
C \leq 30 μF	≤ 15
C > 30 μF	≤ 20
C \geq 100 μF	≤ 30

Metallized Polypropylene Film Capacitors (DC-link application)

PCPW246

 $V_{Rdc} = 1100Vdc$ at 85°C (1300Vdc at 70°C)

CAP. (μF)	Dimension (mm)			P (mm)	P1 (mm)	dv/dt (V/us)	Ipk (A)	I _{rms} ⁽¹⁾ (A)		ESR ⁽²⁾ (m Ω)		TanD ⁽³⁾ ($\times 10^{-4}$)		Ordering Code
	b	h	l					2P	4P	2P	4P	2P	4P	
1	11	21	31	27.5	-	100	100	3.8	-	19.1	-	40	-	P246L11105JA**
1.5	13	23	31	27.5	-	100	150	4.9	-	13.2	-	40	-	P246L11155JA**
2	15	25	31	27.5	-	100	200	6.0	-	10.0	-	40	-	P246L11205JA**
3	18	28	31	27.5	-	100	300	7.6	-	7.4	-	40	-	P246L11305JA**
3.3	19	29	31	27.5	-	100	330	8.0	-	7.0	-	40	-	P246L11335JA**
4	21	31	31	27.5	-	100	400	9.1	-	6.0	-	40	-	P246L11405JA**
5	22	37	31	27.5	-	100	500	10.3	-	5.4	-	40	-	P246L11505JA**
5	20	35	42	37.5	-	73	365	9.2	-	7.0	-	70	-	P246Q11505JA**
6	22	37	42	37.5	10.2	73	438	9.4	10.5	6.6	6.0	70	60	P246Q11605JA**
8	24	39	42	37.5	10.2	73	584	11.4	12.6	5.3	4.8	70	60	P246Q11805JA**
10	28	43	42	37.5	10.2	73	730	13.6	15.1	4.4	4.0	70	60	P246Q11106JA**
12	30	45	42	37.5	10.2	73	876	14.5	16.1	3.9	3.5	70	60	P246Q11126JA**
15	30	51	42	37.5	20.3	73	1095	17.2	19.1	3.2	2.9	70	60	P246Q11156JA**
15	30	45	57	52.5	20.3	50	750	-	14.1	-	5.9	-	120	P246T11156JA**
20	30	45	57	52.5	20.3	50	1000	-	16.0	-	4.6	-	120	P246T11206JA**
25	35	50	57	52.5	20.3	50	1250	-	18.9	-	3.8	-	120	P246T11256JA**
30	40	53	57	52.5	20.3	50	1500	-	21.4	-	3.4	-	140	P246T11306JA**
35	45	55	57	52.5	20.3	50	1750	-	23.8	-	3.0	-	140	P246T11356JA**
40	45	65	57	52.5	20.3	50	2000	-	26.5	-	2.7	-	140	P246T11406JA**
45	45	65	57	52.5	20.3	50	2250	-	27.8	-	2.5	-	140	P246T11456JA**

⁽¹⁾ Maximum RMS current at +70°C, 10KHz, $\Delta T = +15^\circ C$ (Hot spot temp. = $T_{amb} + \Delta T = 70^\circ C + 15^\circ C = 85^\circ C$)

⁽²⁾ Typical ESR values at 10KHz, 20°C


(Maximum ESR value : less than 2.5 x typical ESR value)

⁽³⁾ Maximum TanD value at 10KHz, 20°C


Capacitance	TanD ($\times 10^{-4}$) at 1KHz
P=27.5mm	≤ 10
C \leq 30 μF	≤ 15
C > 30 μF	≤ 20
C \geq 100 μF	≤ 30

PERMISSIBLE VOLTAGE

- These capacitors are designed only for DC voltage. So should not be used for AC line.
- Use the peak voltage(V_{O-P}) within the rated voltage.
- Use the peak to peak ripple voltage(V_{P-P}) within $0.2 \times V_R$

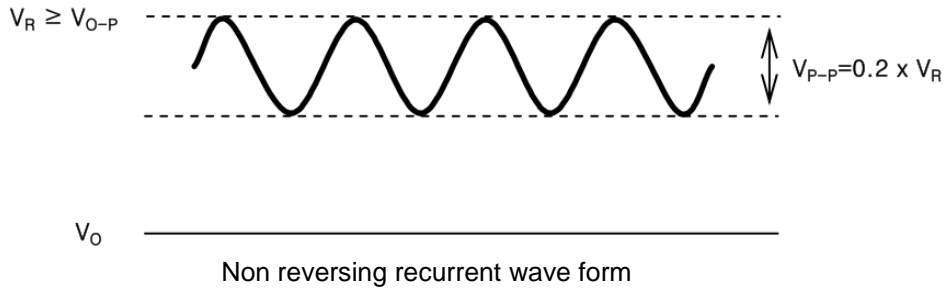









DC VOLTAGE & PEAK CURRENT & RMS CURRENT DERATING

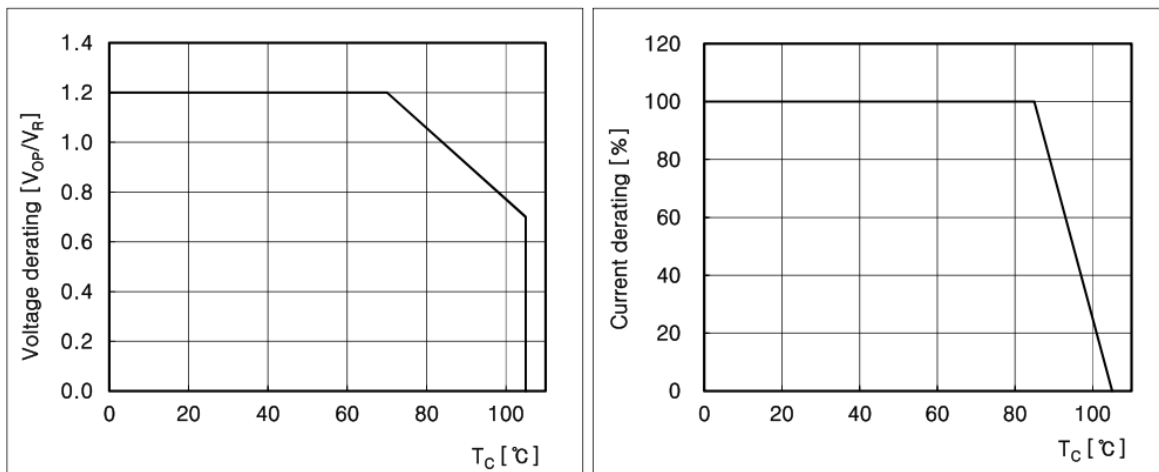





MAXIMUM REPETITIVE PEAK VOLTAGE

Repetitive surge voltage	Maximum duration / day
$1.1 \times V_{Rdc}$	30% of on load duration
$1.15 \times V_{Rdc}$	30min
$1.2 \times V_{Rdc}$	5min
$1.3 \times V_{Rdc}$	1min
$1.5 \times V_{Rdc}$	110ms

CHARACTERISTICS

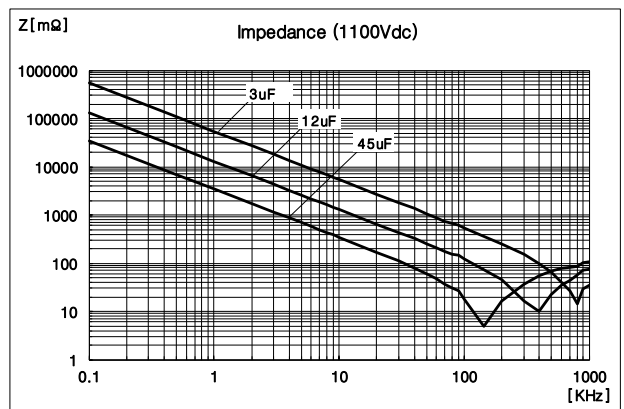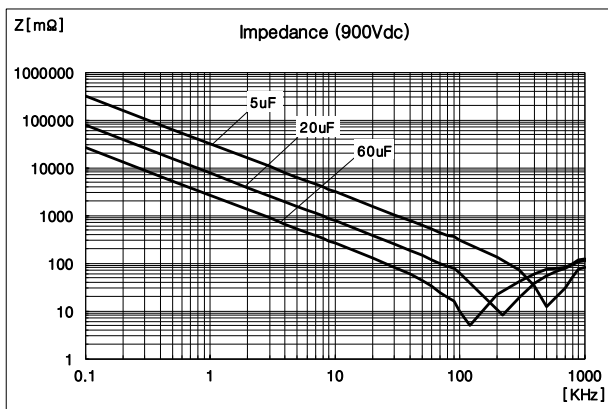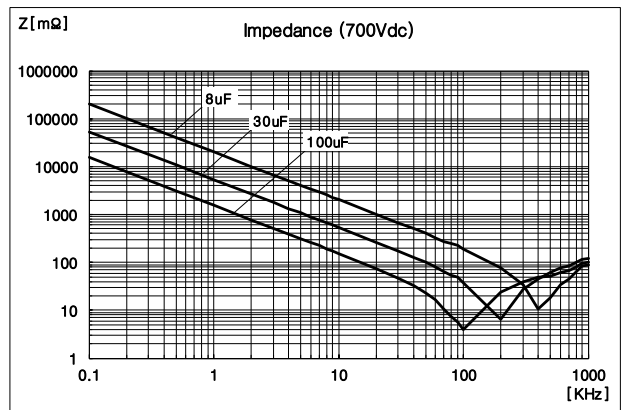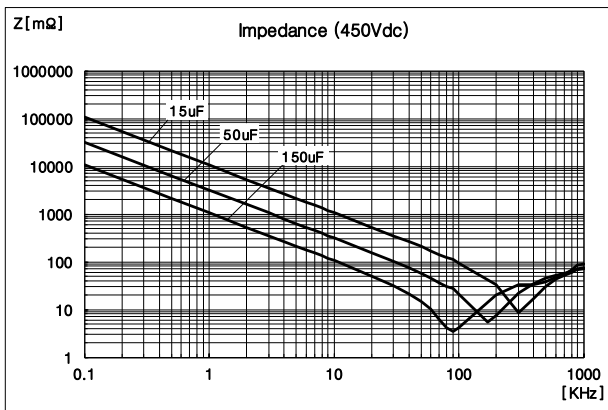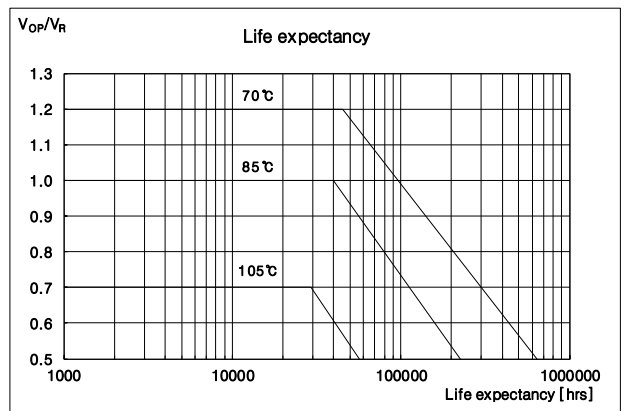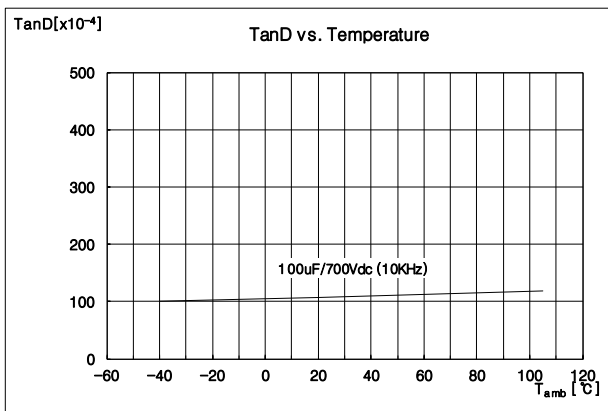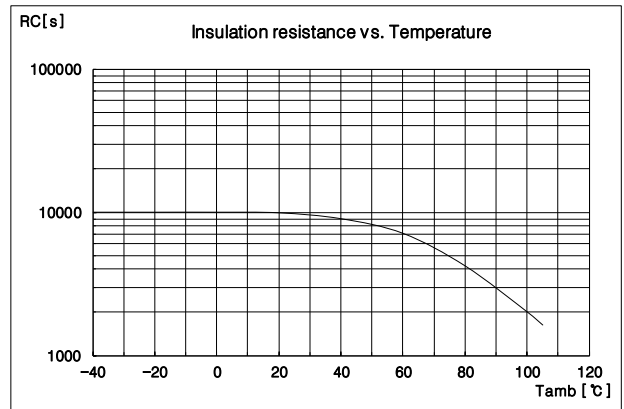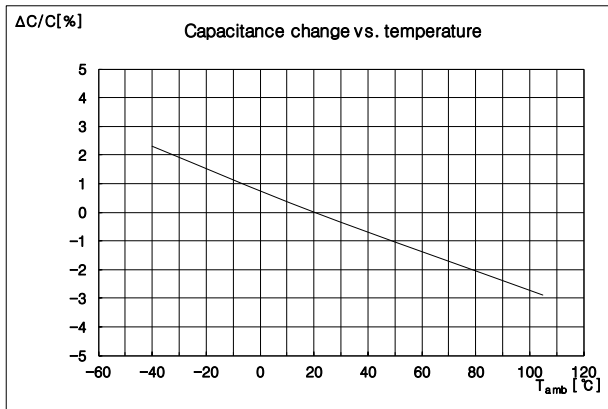

PERMISSIBLE CURRENT

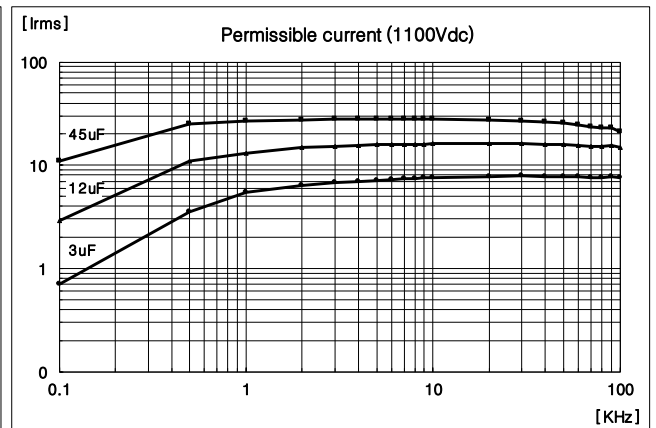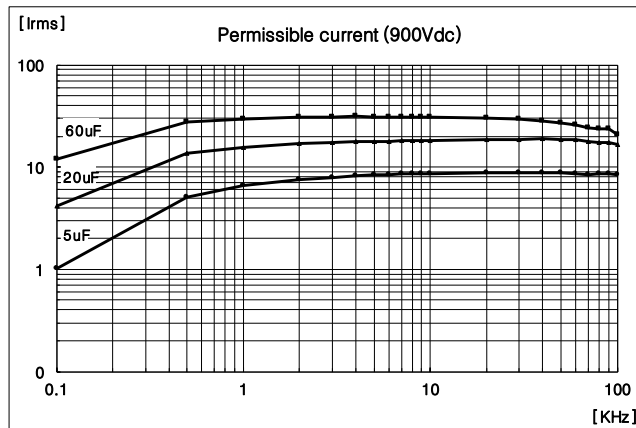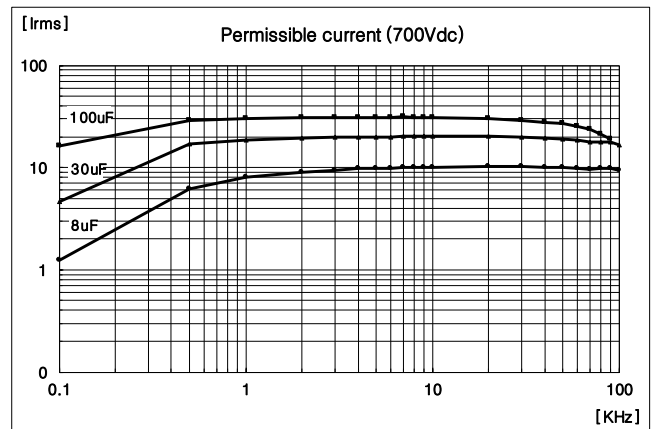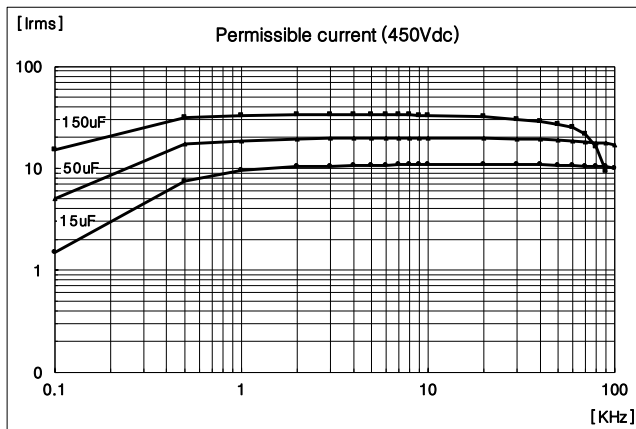

Metalized Polypropylene Film Capacitors (DC-link application)

PRODUCT MARKING

Capacitors are marked on the top with the following information :

- . Rated capacitance code in accordance with IEC 60062
- . Tolerance on rated capacitance : J : ± 5 % K : ± 10 %
- . Rated (DC) Voltage (630 V)
- . Manufacturer's type designation (PCPW246)
- . Code for dielectric material (MKP)
- . Manufacturer's name (PILKOR)
- . Year and week code (WK1720)
- . Marking color : white


Example of marking



Marking on the top

PACKAGE MARKING

The package containing the capacitors is marked as shown.

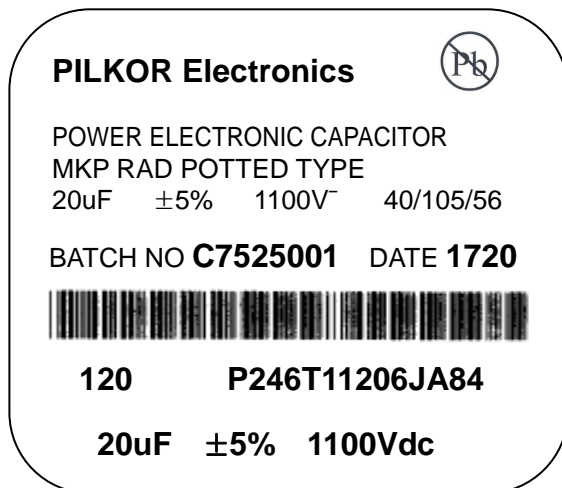

LINE MARKING EXPLANATION

1. Manufacturer`s name
2. Sub-family
3. Pb-free marking (JEDEC-STD-97)
4. Type description
5. Capacitance value, tolerance, Voltage and Climatic category(IEC)
6. Batch no. & production period (year and week code)
7. Quantity and Product code (14NC)
8. Capacitance, tolerance and voltage

ARRANGE PACKING QUANTITY INFORMATION

Dimension (mm) b x h x l	SPQ	PQ
11.0 x 21.0 x 31.0	100	500
13.0 x 23.0 x 31.0	100	500
15.0 x 25.0 x 31.0	120	600
17.0 x 27.0 x 31.0	100	500
18.0 x 28.0 x 31.0	100	500
19.0 x 29.0 x 31.0	90	450
21.0 x 31.0 x 31.0	60	240
22.0 x 37.0 x 31.0	60	240
18.0 x 33.0 x 42.0	100	400
20.0 x 35.0 x 42.0	90	360

Dimension (mm) b x h x l	SPQ	PQ
24.0 x 39.0 x 42.0	75	300
24.0 x 44.0 x 42.0	75	225
28.0 x 43.0 x 42.0	65	195
30.0 x 45.0 x 42.0	60	180
30.0 x 51.0 x 42.0	60	180
30.0 x 45.0 x 57.0	40	120
35.0 x 50.0 x 57.0	35	105
40.0 x 53.0 x 57.0	30	90
45.0 x 55.0 x 57.0	30	60
45.0 x 65.0 x 57.0	30	60


TEST REQUIREMENTS

NO	ITEM	TEST CONDITIONS	REQUIREMENTS																		
1	Capacitance	1KHz at room temperature	Shall be within prescribed tolerance range																		
2	TanD	10KHz at room temperature	Within specified limit																		
3	Insulation Resistance	at 100V, 1min for $V_{Rdc} < 500V$ at 500V, 1min for $V_{Rdc} \geq 500V$	$RC (\Omega \cdot F) > 10,000 s$																		
4	Voltage test between terminal	terminal-terminal : $1.5 \times V_{Rdc}$, 10s terminal-case : $2,000V_{AC}$, 60s	No visible damage or puncture No flashover																		
5	Surge discharge	$1.3 \times V_{Rdc}$ ($1.3 \times I_{pk}$) Number of discharge : 1000 Time lapse : within 2min (total 33.3hrs)	Cap. loss < 2% at 1KHz $\Delta TanD < 1.2 \times \text{initial TanD} + 0.0001$ at 10KHz IR < 50% of specified limit																		
6	Rapid change of temperature	$-40 \pm 2^\circ C$ = lower category temp. $+105 \pm 2^\circ C$ = upper category temp. Transition time = 1h 5 cycles	Visual : No abnormality Cap. loss < 2% at 1KHz $\Delta TanD < 0.0150$ at 10KHz IR < 50% of specified limit																		
7	Damp heat load	$40 \pm 2^\circ C$, 93 \pm 3%RH, V_R , 1000hrs	Cap. loss < 10% at 1KHz $\Delta TanD < 0.0150$ at 10KHz IR < 50% of specified limit																		
8	Endurance	$85 \pm 2^\circ C$: $1.3 \times V_{Rdc}$, 1000hrs $105 \pm 2^\circ C$: $1.3 \times V_{OPdc}$, 1000hrs	Cap. loss < 5% at 1KHz $\Delta TanD < 0.0150$ at 10KHz IR < 50% of specified limit																		
9	Robustness of termination	1) Lead pull test <table border="1"> <thead> <tr> <th>Wire dia.</th> <th>Load</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>$\leq 0.8mm$</td> <td>10N</td> <td>10 \pm1 s</td> </tr> <tr> <td>$> 0.8mm$</td> <td>20N</td> <td>10 \pm1 s</td> </tr> </tbody> </table> 2) Lead bend test(2cycle) <table border="1"> <thead> <tr> <th>Wire dia.</th> <th>Load</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>$\leq 0.8mm$</td> <td>10N</td> <td>2~3 s/bend</td> </tr> <tr> <td>$> 0.8mm$</td> <td>20N</td> <td>2~3 s/bend</td> </tr> </tbody> </table>	Wire dia.	Load	Time	$\leq 0.8mm$	10N	10 \pm 1 s	$> 0.8mm$	20N	10 \pm 1 s	Wire dia.	Load	Time	$\leq 0.8mm$	10N	2~3 s/bend	$> 0.8mm$	20N	2~3 s/bend	2) No abnormality such as cutting, slack of termination
Wire dia.	Load	Time																			
$\leq 0.8mm$	10N	10 \pm 1 s																			
$> 0.8mm$	20N	10 \pm 1 s																			
Wire dia.	Load	Time																			
$\leq 0.8mm$	10N	2~3 s/bend																			
$> 0.8mm$	20N	2~3 s/bend																			
10	Solderability	Non-activated colophony flux 501 Solder bath temp. : $245 \pm 5^\circ C$ Immerse time : $2 \pm 0.5s$	Good tinning as evidenced by free flowing of the solder with wetting of the terminations (>95%)																		
11	Resistance to soldering heat	No pre-drying Solder bath temp. : $260 \pm 5^\circ C$ Dipping time : $10 \pm 1s$	Visual : No abnormality Cap. loss < 2% at 1KHz $\Delta TanD < 0.0050$ at 10KHz IR < 50% of specified limit																		
12	Vibration	10Hz to 55Hz ; Amplitude $\pm 0.35mm$ or acceleration 98m/s ² Test duration : 10 frequency cycles 3 axes offset from each other by 90° 1octave/min	No visible damage Cap. loss < 2% at 1KHz $\Delta TanD < 0.0050$ at 10KHz IR < 50% of specified limit																		
13	Shock or impact	Pulse shape : half sine Acceleration : 490 m/s ² Duration of pulse : 11 ms	No visible damage Cap. loss < 2% at 1KHz $\Delta TanD < 0.0050$ at 10KHz IR < 50% of specified limit																		

MATERIAL LIST

- Product type ; Metallized Polypropylene film capacitors

- Model name ; P246XXXXXXXXXX

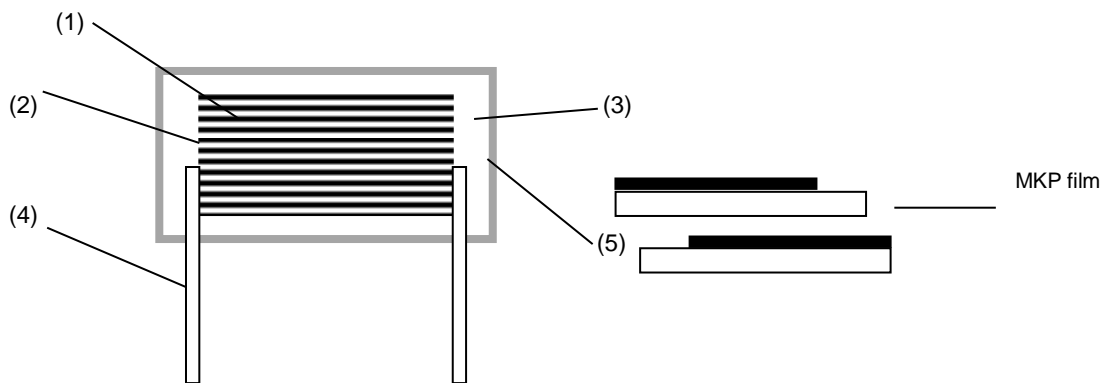

	Description	Material
1	MKP Film	Metallized polypropylene film
2	Metal Spray	Tin-Zinc
3	Epoxy	UL94V-0
4	Lead Wire	Tin plated Copper wire 0.8/1.0/1.2mm [Sn100%:10 μ m]
5	PBT case	Flame retardant Plastic case UL94-V0

PILKOR ELECTRONICS



Soldering guidelines

The resistance to soldering heat and the solderability, our products to comply with the “IEC 60384-1” and the additional specifications.


General notes on soldering

Permissible heat exposure loads on film capacitors are primarily characterized by the upper category temperature T_{max} . Long exposure to temperatures above this type-related temperature limit can lead to changes in the plastic dielectric and thus change irreversibly a capacitor's electrical characteristics. For short exposures (as in practical soldering processes) the heat load (and thus the possible effects on a capacitor) will also depend on other factors like:

- Pre-heating temperature and time
- Forced cooling immediately after soldering
- Terminal characteristics: diameter, length, thermal resistance, special configurations (e.g. crimping)
- Height of capacitor above solder bath
- Shadowing by neighboring components
- Additional heating due to heat dissipation by neighboring components
- Use of solder-resist coatings

The overheating associated with some of these factors can usually be reduced by suitable countermeasures. For example, if a pre-heating step cannot be avoided, an additional or reinforced cooling process may possibly have to be included.

Recommended wave soldering profile

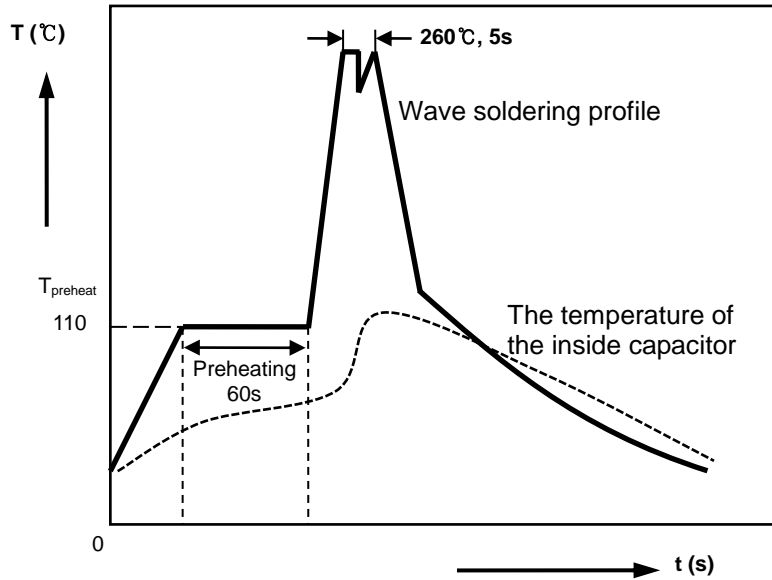

1. The maximum set-up temperature of the soldering process

Maximum preheat temperature	Maximum peak soldering temperature
110°C	260°C

2. The maximum temperature of the inside capacitor:

Set the temperature so that inside the element the maximum temperature is below the limit:-

Maximum temperature measured inside the element
110°C

