

## CONDUCTIVE POLYMER SOLID CAPACITORS

APPROVAL NO.

11207

AXA 10 VB 470 (M)

SERIES

AXA


RATING

10 V 470  $\mu$ F

CASE SIZE

 $\Phi 8 \times 11.5$  L


## A. DIAGRAM OF DIMENSION

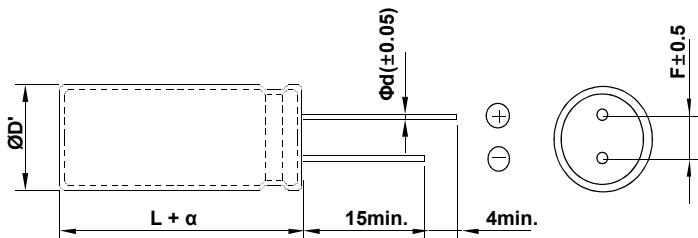

[ UNIT: mm]

$\Phi D'$ (+0.5max.)	8
L	11.5
$\alpha$	0.5
$\Phi d(\pm 0.05)$	0.6
F( $\pm 0.5$ )	3.5

## B. MARKING

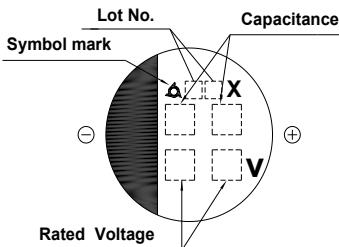

## C. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : -55 ~ +105°C
- B. RATED VOLTAGE : 10 V<sub>DC</sub>
- C. SURGE VOLTAGE : 11.5 V<sub>DC</sub> at 105°C
- D. CAPACITANCE TOLERANCE : ±20% at 20°C, 120Hz
- E. LEAKAGE CURRENT : Lower 940 nA, after 2 minutes at 20°C
- F. DISSIPATION FACTOR (TANδ) : Lower 0.10 at 20°C, 120Hz
- G. ESR : Lower 14 mΩ at 20°C, 100kHz
- H. RATED RIPPLE CURRENT : 4350 mArms at 105°C, 100kHz

## I. FREQUENCY COEFFICIENT FOR RIPPLE CURRENT

Freq.(Hz)	$120 \leq f < 1k$	$1k \leq f < 10k$	$10k \leq f < 100k$	$100k \leq f < 500k$
Factor	0.05	0.3	0.7	1

## J. TEMPERATURE CHARACTERISTIC

\* Impedance ratio

$Z(-25^\circ\text{C}) / Z(+20^\circ\text{C})$	$\leq 1.15$
$Z(-55^\circ\text{C}) / Z(+20^\circ\text{C})$	$\leq 1.25$

at 100kHz

K. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 5,000 hours at 105°C.

- # Capacitance change  $\leq \pm 20\%$  of the initial value
- # Tanδ  $\leq 150\%$  of the initial specified value
- # ESR  $\leq 150\%$  of the initial specified value
- # Leakage Current  $\leq$  The initial specified value


L. Bias Humidity : The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at 60°C, 90 to 95%RH for 1,000 hours.

- # Capacitance change  $\leq \pm 20\%$  of the initial value
- # Tanδ  $\leq 150\%$  of the initial specified value
- # ESR  $\leq 150\%$  of the initial specified value
- # Leakage Current  $\leq$  The initial specified value

## M. CLEANING CONDITIONS : Solvent-proof

\* Notes : If any doubt arises, remeasure the leakage current after following voltage treatment.

Voltage treatment : Applying rated voltage for 120 minutes at 105°C.

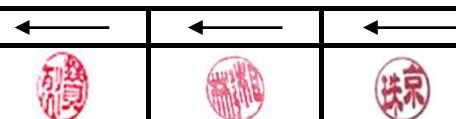

SamYoung Electronics Co., Ltd.