

CONDUCTIVE POLYMER SOLID CAPACITORS

APPROVAL NO.

9536

AXA 16 VB 330 (M)

SERIES

AXA


RATING

16 V 330 μ F

CASE SIZE

 $\Phi 8 \times 11.5$ L


A. DIAGRAM OF DIMENSION

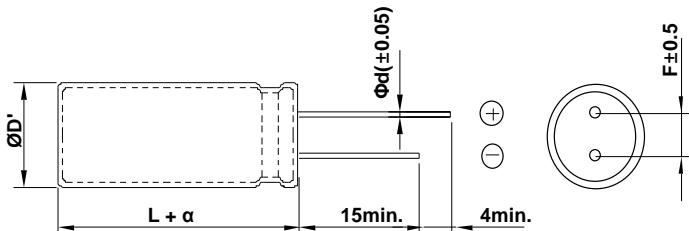

[UNIT: mm]

$\Phi d' (+0.5\text{max.})$	8
L	11.5
α	0.5
$\Phi d(\pm 0.05)$	0.6
F(± 0.5)	3.5

B. MARKING

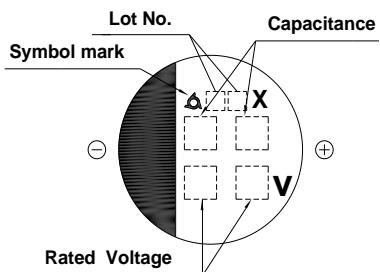

C. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : $-55 \sim +105^\circ\text{C}$
- B. RATED VOLTAGE : 16 V_{DC}
- C. SURGE VOLTAGE : $18.4 \text{ V}_{\text{DC}}$ at 105°C
- D. CAPACITANCE TOLERANCE : $\pm 20\%$ at $20^\circ\text{C}, 120\text{Hz}$
- E. LEAKAGE CURRENT : Lower $1056 \mu\text{A}$, after 2 minutes at 20°C
- F. DISSIPATION FACTOR (TAN δ) : Lower 0.10 at $20^\circ\text{C}, 120\text{Hz}$
- G. ESR : Lower $14 \text{ m}\Omega$ at $20^\circ\text{C}, 100\text{kHz}$
- H. RATED RIPPLE CURRENT : 4350 mA rms at $105^\circ\text{C}, 100\text{kHz}$
- I. FREQUENCY COEFFICIENT FOR RIPPLE CURRENT

Freq.(Hz)	$120 \leq f < 1\text{k}$	$1\text{k} \leq f < 10\text{k}$	$10\text{k} \leq f < 100\text{k}$	$100\text{k} \leq f < 500\text{k}$
Factor	0.05	0.3	0.7	1

J. TEMPERATURE CHARACTERISTIC * Impedance ratio

$Z(-25^\circ\text{C}) / Z(+20^\circ\text{C})$	≤ 1.15
$Z(-55^\circ\text{C}) / Z(+20^\circ\text{C})$	≤ 1.25

at 100kHz

K. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 5,000 hours at 105°C .

- # Capacitance change $\leq \pm 20\%$ of the initial value
- # Tan δ $\leq 150\%$ of the initial specified value
- # ESR $\leq 150\%$ of the initial specified value
- # Leakage Current \leq The initial specified value

L. Bias Humidity : The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at $60^\circ\text{C}, 90$ to 95% RH for 1,000 hours.

- # Capacitance change $\leq \pm 20\%$ of the initial value
- # Tan δ $\leq 150\%$ of the initial specified value
- # ESR $\leq 150\%$ of the initial specified value
- # Leakage Current \leq The initial specified value

M. CLEANING CONDITIONS : Solvent-proof

* Notes : If any doubt arises, remeasure the leakage current after following voltage treatment.

Voltage treatment : Applying rated voltage for 120 minutes at 105°C .

	↔	↔	↔



SamYoung Electronics Co., Ltd.