

# CONDUCTIVE POLYMER SOLID CAPACITORS

APPROVAL NO.

9535

AXA 6.3 VB 680 (M)

SERIES

AXA


RATING

6.3 V 680  $\mu$ F

CASE SIZE

 $\Phi 8 \times 11.5$  L


## A. DIAGRAM OF DIMENSION

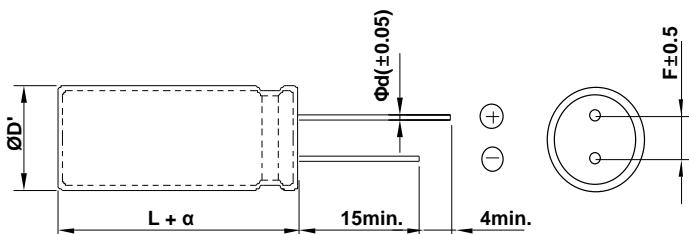

[ UNIT: mm]

$\Phi D' (+0.5\text{max.})$	8
L	11.5
$\alpha$	0.5
$\Phi d(±0.05)$	0.6
F( $±0.5$ )	3.5

## B. MARKING

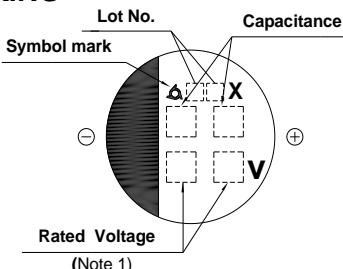

Note 1 : 6.3WV is marked by 6V.

## C. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : -55 ~ +105°C
- B. RATED VOLTAGE : 6.3 V<sub>DC</sub>
- C. SURGE VOLTAGE : 8.2 V<sub>DC</sub> at 105°C
- D. CAPACITANCE TOLERANCE : ±20% at 20°C, 120Hz
- E. LEAKAGE CURRENT : Lower 856.8  $\mu$ A, after 2 minutes at 20°C
- F. DISSIPATION FACTOR (TANδ) : Lower 0.10 at 20°C, 120Hz
- G. ESR : Lower 14 mΩ at 20°C, 100kHz
- H. RATED RIPPLE CURRENT : 4350 mAmps at 105°C, 100kHz
- I. FREQUENCY COEFFICIENT FOR RIPPLE CURRENT

Freq.(Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k
Factor	0.05	0.3	0.7	1

### J. TEMPERATURE CHARACTERISTIC \* Impedance ratio

Z(-25°C) / Z(+20°C)	≤ 1.15
Z(-55°C) / Z(+20°C)	≤ 1.25

at 100kHz

K. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 5,000 hours at 105°C.

- # Capacitance change ≤ ±20% of the initial value
- # Tanδ ≤ 150% of the initial specified value
- # ESR ≤ 150% of the initial specified value
- # Leakage Current ≤ The initial specified value


L. Bias Humidity : The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at 60°C, 90 to 95%RH for 1,000 hours.

- # Capacitance change ≤ ±20% of the initial value
- # Tanδ ≤ 150% of the initial specified value
- # ESR ≤ 150% of the initial specified value
- # Leakage Current ≤ The initial specified value

### M. CLEANING CONDITIONS : Solvent-proof

\* Notes : If any doubt arises, remeasure the leakage current after following voltage treatment.

Voltage treatment : Applying rated voltage for 120 minutes at 105°C.

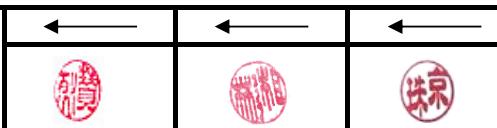

SamYoung Electronics Co., Ltd.