
ROPLA 2019.06.11

APPROVAL NO. **ALUMINUM ELECTROLYTIC CAPACITORS** 10029 **SERIES NBC NBC** 200 **VB** 330 (M) **RATING** 200 V 330 μF



Vent case

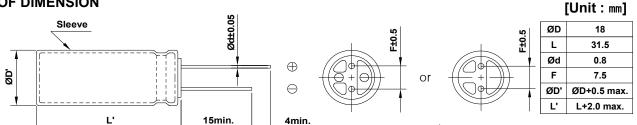

120

1k

10k

50k

2.15

100k

2.25


(at 120Hz)

4min.

B. MARKING: DARK BLUE SLEEVE & SILVER INK



FRONT VIEW OF CAPACITOR



CASE SIZE

Ø 18 × 31.5 L

BACK VIEW OF CAPACITOR

C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE : <u>-40</u> ~+105℃

200 V_{DC} **B RATED VOLTAGE** C. SURGE VOLTAGE 250 V_{DC}

D. CAPACITANCE TOLERANCE : ± 20% at 20℃,120Hz

E. LEAKAGE CURRENT : Lower 2740 µA, after 1 minute at 20 °C

F. DISSIPATION FACTOR (TANδ) : Lower <u>0.20</u> at 20℃, 120Hz **G. RATED RIPPLE CURRENT** : <u>1231 mArms</u> at 105℃, 120Hz

H. RATED RIPPLE CURRENT MULTIPLIERS Freq.(Hz)

(Frequency Multipliers) **Factor** 1.00 1.67 2.05 I. TEMPERATURE CHARACTERISTIC Z(-25°C) / Z(20°C) 3

(Max. Impedance ratio) Z(-40°C) / Z(20°C)

J. LOAD LIFE: The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not

exceed the rated voltage) for 12,000 hours at 105℃.

Capacitance change ≤ ±20 % of the initial value

Tanδ ≤ 200 % of the initial specified value

≤ The initial specified value # Leakage Current

K. SHELF LIFE: The following specifications shall be satisfied when the capacitors are restored to 20℃

after exposing them for 1,000 hours at 105℃ without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,

at least 24 hours and not more than 48 hours before the measurements.

Capacitance change ≤ ±20 % of the initial value

Tanδ ≤ 200 % of the initial specified value \leq 500 % of the initial specified value # Leakage Current

L. CLEANING CONDITIONS: Non-solvent proof

M. OTHERS : Satisfied charateristics KS C IEC 60384-4

