ROPLA 2019.06.17

## **ALUMINUM ELECTROLYTIC CAPACITORS**

APPROVAL NO.

10061

[Unit: mm]

12.5

30

0.6

5.0

ØD+0.5 max. L+2.0 max.

ØD


L

ØD'

NBC 250 VB 82 (M)

	SERIES	NBC		
	RATING	250 V 82 μF		
	CASE SIZE	Ø 12.5 × 30 L		



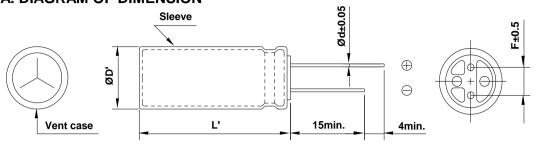

## B. MARKING: DARK BLUE SLEEVE & SILVER INK



SAM OT YOUNG NO

## FRONT VIEW OF CAPACITOR

**BACK VIEW OF CAPACITOR** 

## C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE :  $-40 \sim +105 °$ C B. RATED VOLTAGE :  $250 V_{DC}$  C. SURGE VOLTAGE :  $300 V_{DC}$ 

D. CAPACITANCE TOLERANCE :  $\pm 20\%$  at 20 °C,120 Hz

E. LEAKAGE CURRENT : Lower 920 µA, after 1 minute at 20 °C

F. DISSIPATION FACTOR (TAN $\delta$ ) : Lower <u>0.20</u> at 20  $^{\circ}$ C, 120 Hz G. RATED RIPPLE CURRENT : <u>660 mArms</u> at 105  $^{\circ}$ C, 120 Hz

H. RATED RIPPLE CURRENT MULTIPLIERS

(Frequency Multipliers)

Freq.(Hz)	120	1k	10k	50k	100k
Factor	1.00	1.75	2.25	2.35	2.50

I. TEMPERATURE CHARACTERISTIC

(Max. Impedance ratio)

Z(-25℃) / Z(20℃)	3
Z(-40℃) / Z(20℃)	6

(at 120 Hz)

J. LOAD LIFE: The following specifications shall be satisfied when the capacitors are restored to 20 ℃ after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 12,000 hours at 105 ℃.

# Capacitance change ≤ ±20 % of the initial value

# Tan $\delta$   $\leq$  <u>200 %</u> of the initial specified value

# Leakage Current ≤ The initial specified value

K. SHELF LIFE: The following specifications shall be satisfied when the capacitors are restored to 20 ℃ after exposing them for 1,000 hours at 105 ℃ without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,

at least 24 hours and not more than 48 hours before the measurements.

# Capacitance change  $\leq \pm 20 \%$  of the initial value

# Tan $\delta$   $\leq$   $\frac{200 \%}{}$  of the initial specified value # Leakage Current  $\leq$   $\frac{500 \%}{}$  of the initial specified value

L. CLEANING CONDITIONS: Non-solvent proof

M. OTHERS : Satisfied charateristics KS C IEC 60384-4

