

## ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

12823

NBD 200 VB 560 (M)

SERIES

NBD


RATING

200 V 560  $\mu$ F

CASE SIZE

 $\varnothing$  18 x 45 L

## A. DIAGRAM OF DIMENSION

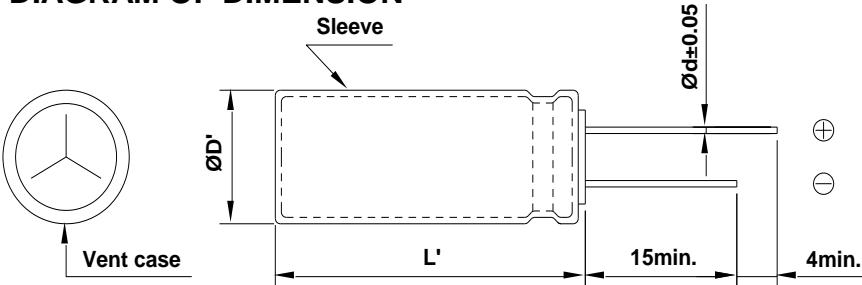


[UNIT : mm]

ØD	18
L	45
Ød	0.8
F	7.5
ØD'	ØD+0.5 max.
L'	L+2.0 max.

B. MARKING : DARK BLUE SLEEVE & SILVER INK

FRONT VIEW OF CAPACITOR

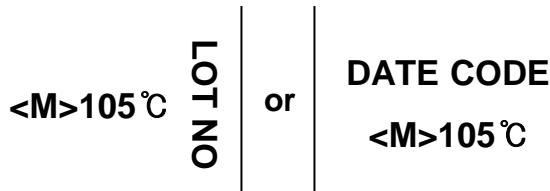

BACK VIEW OF CAPACITOR

## C. ELECTRICAL CHARACTERISTICS

## A. OPERATING TEMPERATURE RANGE

: -40 ~ +105 °C

## B. RATED VOLTAGE

: 200 V<sub>DC</sub>

## C. SURGE VOLTAGE

: 250 V<sub>DC</sub>

## D. CAPACITANCE TOLERANCE

: ±20% at 20 °C, 120Hz

## E. LEAKAGE CURRENT

: Lower 4580  $\mu$ A, after 1 minute at 20 °C

## F. DISSIPATION FACTOR (TANδ)

: Lower 0.20 at 20 °C, 120Hz

## G. RATED RIPPLE CURRENT

: 1982 mArms at 105 °C, 120Hz

H. TEMPERATURE CHARACTERISTIC  
(Max. Impedance ratio)

Z(-25 °C) / Z(20 °C)	3
Z(-40 °C) / Z(20 °C)	6

(at 120Hz)

I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 12,000 hours at 105 °C.

# Capacitance change ≤ ±20 % of the initial value

# Tanδ ≤ 200 % of the initial specified value

# Leakage Current ≤ The initial specified value

J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after exposing them for 1,000 hours at 105 °C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.


# Capacitance change ≤ ±20 % of the initial value

# Tanδ ≤ 200 % of the initial specified value

# Leakage Current ≤ 500 % of the initial specified value

K. CLEANING CONDITIONS : Non-solvent proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4

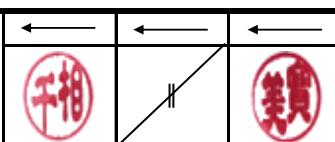

SamYoung Electronics Co., Ltd.