[Unit: mm]

## **ALUMINUM ELECTROLYTIC CAPACITORS**


APPROVAL NO.

391 - 1047

NXA 16 **VB** 470 (M)

|  | SERIES    | NXA                 |  |  |
|--|-----------|---------------------|--|--|
|  | RATING    | 16 V 470 <i>μ</i> F |  |  |
|  | CASE SIZE | Ø 10 × 12.5 L       |  |  |

## A. DIAGRAM OF DIMENSION

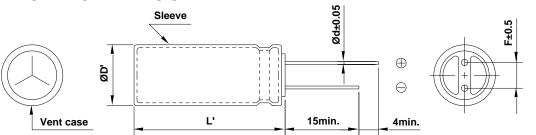

|     | • •         |  |
|-----|-------------|--|
| ØD  | 10          |  |
| L   | 12.5        |  |
| Ød  | 0.6         |  |
| F   | 5.0         |  |
| ØD' | ØD+0.5 max. |  |
| L'  | L+2.0 max.  |  |

B. MARKING: DARK BROWN SLEEVE & SILVER INK



SAM YOUNG <M>105 ℃

FRONT VIEW OF CAPACITOR

**BACK VIEW OF CAPACITOR** 

## C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE : <u>-40</u> ~<u>+105℃</u>

**B. RATED VOLTAGE** : 16 V<sub>DC</sub> C. SURGE VOLTAGE : 20 V<sub>DC</sub>

D. CAPACITANCE TOLERANCE : ± 20% at 20℃,120Hz

**E. LEAKAGE CURRENT** : Lower 75.2 μA, after 2 minutes at 20 °C

F. DISSIPATION FACTOR (ΤΑΝδ) : Lower <u>0.16</u> at 20℃, 120Hz **G. RATED RIPPLE CURRENT** : 865 mArms at 105 °C , 100 kb

H. RATED RIPPLE CURRENT MULTIPLIERS :

(Frequency Multipliers)

| Freq.(Hz) | 120  | 1k   | 10k  | 50k  | 100k |
|-----------|------|------|------|------|------|
| Factor    | 0.50 | 0.85 | 0.94 | 0.96 | 1.00 |

I. TEMPERATURE CHARACTERISTIC

(Max. Impedance ratio)

| Z(-25℃) / Z(20℃)   | 2 |
|--------------------|---|
| Z(-40°C) / Z(20°C) | 4 |

(at 120Hz)

J. LOAD LIFE: The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 7,000 hours at 105℃.

> # Capacitance change  $\leq \pm 25 \%$  of the initial value

≤ 200 % of the initial specified value # Tanδ

# Leakage Current ≤ The initial specified value

K. SHELF LIFE: The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,

at least 24 hours and not more than 48 hours before the measurements.

# Capacitance change ≤ ±25 % of the initial value

# Tanδ ≤ 200 % of the initial specified value

≤ The initial specified value # Leakage Current

L. CLEANING CONDITIONS: Non-solvent proof → Refer to Cleaning conditions (Page 6)

: Satisfied charateristics KS C IEC 60384-4

※ IMP.(20°C,100kHz): 0.080 (Ω) ↓







