

## ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

8263

NXA 63 VB 100 (M)

SERIES

NXA


RATING

63 V 100  $\mu$ F

CASE SIZE

 $\varnothing$ 8 × 15L

## A. DIAGRAM OF DIMENSION

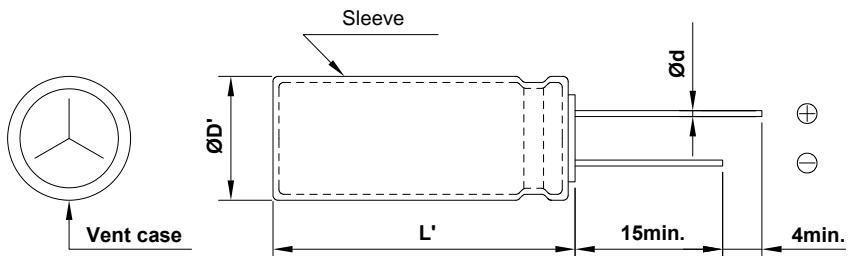


[Unit : mm]

$\varnothing$ D	8
L	15
$\varnothing$ d	0.6
F	3.5
$\varnothing$ D'	$\varnothing$ D+0.5 max.
L'	L+1.5 max.

## B. MARKING : DARK BROWN SLEEVE &amp; SILVER INK



FRONT VIEW OF CAPACITOR



BACK VIEW OF CAPACITOR

## C. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : -40 ~ +105°C  
 B. RATED VOLTAGE : 63 V<sub>DC</sub>  
 C. SURGE VOLTAGE : 79 V<sub>DC</sub>  
 D. CAPACITANCE TOLERANCE : ±20% at 20°C, 120Hz  
 E. LEAKAGE CURRENT : Lower 63  $\mu$ A, after 2 minutes at 20°C  
 F. DISSIPATION FACTOR (TANδ) : Lower 0.09 at 20°C, 120Hz  
 G. RATED RIPPLE CURRENT : 665 mArms at 105°C, 100 kHz  
 H. RATED RIPPLE CURRENT MULTIPLIERS : 

Freq.(Hz)	120	1k	10k	50k	100k
Factor	0.40	0.75	0.90	0.95	1.00

  
 I. TEMPERATURE CHARACTERISTIC (Max. Impedance ratio) : 

Z(-25°C) / Z(20°C)	2
Z(-40°C) / Z(20°C)	3

J. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied

(the peak voltage shall not exceed the rated voltage) for 7,000 hours at 105°C.

# Capacitance change  $\leq$  ±25 % of the initial value

# Tanδ  $\leq$  200 % of the initial specified value

# Leakage Current  $\leq$  The initial specified value

K. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.

# Capacitance change  $\leq$  ±25 % of the initial value


# Tanδ  $\leq$  200 % of the initial specified value

# Leakage Current  $\leq$  The initial specified value

L. CLEANING CONDITIONS : Non-Solvent proof

M. OTHERS : Satisfied characteristics KS C IEC 60384-4

\* IMP.(20°C, 100kHz) : 0.16 ( $\Omega$ ) ↓

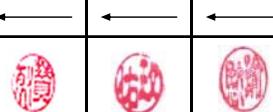

Sam Young Electronics Co., Ltd.