

ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

8700

NXA 63 VB 10 (M)

SERIES

NXA


RATING

63 V 10 μ F

CASE SIZE

 \varnothing 5 x 11 L

A. DIAGRAM OF DIMENSION

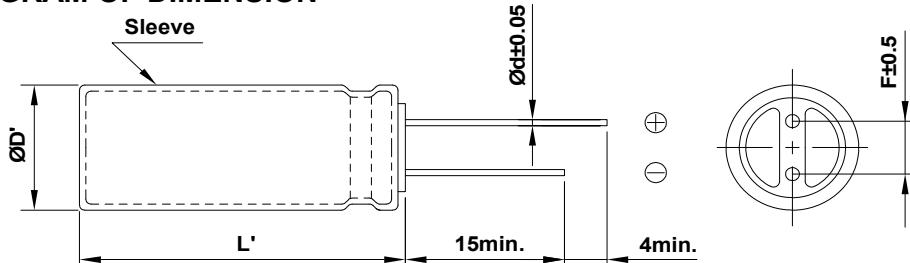

[UNIT : mm]

\varnothing D	5
L	11
\varnothing d	0.5
F	2.0
\varnothing D'	\varnothing D+0.5max.
L'	L+1.5max.

B. MARKING: DARK BROWN SLEEVE & SILVER INK


NXA
63 V
10 μ F

FRONT VIEW OF CAPACITOR

 * MARKED ON
THE TOP OF THE CASE

SAM
YOUNG or
<M>105°C

 * MARKED
ON THE SLEEVE
LOT NO
M>105°C

BACK VIEW OF CAPACITOR

C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE

: -40 ~ +105°C

B. RATED VOLTAGE

: 63 V_{DC}

C. SURGE VOLTAGE

: 79 V_{DC}

D. CAPACITANCE TOLERANCE

: ± 20% at 20°C, 120Hz

E. LEAKAGE CURRENT

: Lower 6.3 μ A, after 1 minute at 20°CF. DISSIPATION FACTOR (TAN δ): Lower 0.09 at 20°C, 120Hz

G. RATED RIPPLE CURRENT

: 100 mArms at 105°C, 100kHzH. RATED RIPPLE CURRENT MULTIPLIERS
(Frequency Multipliers)

Freq.(Hz)	120	1k	10k	50k	100k
Factor	0.40	0.75	0.90	0.95	1.00

I. TEMPERATURE CHARACTERISTIC
(Max. Impedance ratio)

Z(-25°C) / Z(20°C)	2
Z(-40°C) / Z(20°C)	3

(at 120Hz)

J. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C
after the rated voltage is applied for 5,000 hours at 105°C.# Capacitance change \leq ±25 % of the initial value# Tan δ \leq 200 % of the initial specified value# Leakage Current \leq The initial specified valueK. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C
after exposing them for 500 hours at 105°C without voltage applied.The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,
at least 24 hours and not more than 48 hours before the measurement.# Capacitance change \leq ±25 % of the initial value# Tan δ \leq 200 % of the initial specified value# Leakage Current \leq The initial specified value

L. CLEANING CONDITIONS : Non-solvent proof

M. OTHERS : Satisfied characteristics KS C IEC 60384-4

※ IMP(20°C, 100kHz) : 1.5 (Ω) ↓

SamYoung Electronics Co., Ltd.