## **ALUMINUM ELECTROLYTIC CAPACITORS**

APPROVAL NO.


127 - 084

NXH 10 VB 1000 (M)

SERIES	NXH
RATING	10 V 1000 μF
CASE SIZE	Ø 10 × 12 5 l

## A. DIAGRAM OF DIMENSION

Vent case

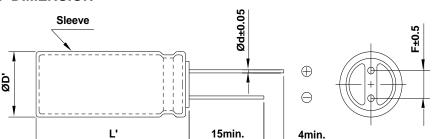

ØD	10
L	12.5
Ød	0.6
F	5.0
ØD'	ØD+0.5 max.
L'	L+2.0 max.

[Unit:mm]

B. MARKING: YELLOW SLEEVE & BLACK INK



SAM YOUNG S <M>105°C O

FRONT VIEW OF CAPACITOR

**BACK VIEW OF CAPACITOR** 

## C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE :  $-40 \sim +105\%$  B. RATED VOLTAGE :  $10 V_{DC}$ 

C. SURGE VOLTAGE : 13 V<sub>DC</sub>

D. CAPACITANCE TOLERANCE :  $\pm 20\%$  at 20 °C,120 Hz

E. LEAKAGE CURRENT : Lower 100 μÅ, after 2 minutes at 20 ℃ F. DISSIPATION FACTOR (TANδ) : Lower 0.19 at 20 ℃, 120 ½

G. RATED RIPPLE CURRENT : 1330 mArms at 105 °C , 100 ₩±
H. RATED RIPPLE CURRENT MULTIPLIERS : 5 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1 100 ₩±

1

Freq.(Hz)

120

1k

10k

50k

0.97

100k

1.00

J. LOAD LIFE: The following specifications shall be satisfied when the capacitors are restored to 20  $^{\circ}$ C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for  $\underline{10.000}$  hours at  $\underline{105\,^{\circ}}$ C.

# Capacitance change  $\leq \pm 30 \%$  of the initial value

# Tan $\delta$   $\leq 200 \%$  of the initial specified value

# Leakage Current ≤ The initial specified value

K. SHELF LIFE: The following specifications shall be satisfied when the capacitors are restored to 20 ℃ after exposing them for 1,000 hours at 105℃ without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,

at least 24 hours and not more than 48 hours before the measurements.

# Capacitance change  $\leq \pm 30 \%$  of the initial value

# Tanδ ≤ 200 % of the initial specified value

# Leakage Current ≤ The initial specified value

L. CLEANING CONDITIONS: Non-solvent proof → Refer to Cleaning conditions (Page 6)

M. OTHERS : Satisfied charateristics KS C IEC 60384-4

**※ IMP.(20℃,100**₩z): 0.039 (Ω) ↓







