


ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

NXH 16 VB 3300 (M)

SERIES	NXH	
RATING	16 V	3300 μ F
CASE SIZE	\varnothing 12.5 × 25 L	

A. DIAGRAM OF DIMENSION

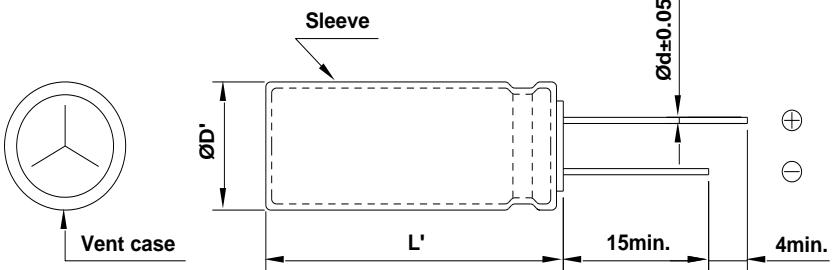

[UNIT : mm]

ØD	12.5
L	25
Ød	0.6
F	5.0
ØD'	ØD + 0.5 max.
L'	L + 2.0 max.

B. MARKING : YELLOW SLEEVE & BLACK INK

NXH
 16 V
 3300 μ F

SAM
 YOUNG
 <M> 105°C

FRONT VIEW OF CAPACITOR

BACK VIEW OF CAPACITOR

C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE

: -40 ~ +105°C

B. RATED VOLTAGE

: 16 V_{DC}

C. SURGE VOLTAGE

: 20 V_{DC}

D. CAPACITANCE TOLERANCE

: ±20% at 20°C, 120Hz

E. LEAKAGE CURRENT

: Lower 528 μ A, after 2 minutes at 20°C

F. DISSIPATION FACTOR (TANδ)

: Lower 0.20 at 20°C, 120Hz

G. RATED RIPPLE CURRENT

: 2,900 mArms at 105°C, 100kHz

H. RATED RIPPLE CURRENT MULTIPLIERS
(Frequency Multipliers)

Freq.(Hz)	120	1k	10k	50k	100k
Factor	0.70	0.85	0.98	0.99	1.00

I. TEMPERATURE CHARACTERISTIC
(Max. Impedance ratio)

Z(-25°C) / Z(20°C)	2
Z(-40°C) / Z(20°C)	3

(at 120Hz)

J. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 10,000 hours at 105°C.

Capacitance change ≤ ±25 % of the initial value

Tanδ ≤ 200 % of the initial specified value

Leakage Current ≤ The initial specified value

K. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.

Capacitance change ≤ ±25 % of the initial value


Tanδ ≤ 200 % of the initial specified value

Leakage Current ≤ The initial specified value

L. CLEANING CONDITIONS : Non-solvent proof

M. OTHERS : Satisfied characteristics KS C IEC 60384-4

* IMP.(20°C, 100kHz) : 0.015 (Ω) ↓

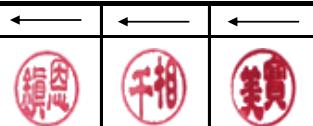

Sam Young Electronics Co., Ltd.