

ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

7712

NXH 25 VB 100 (M)

SERIES

NXH

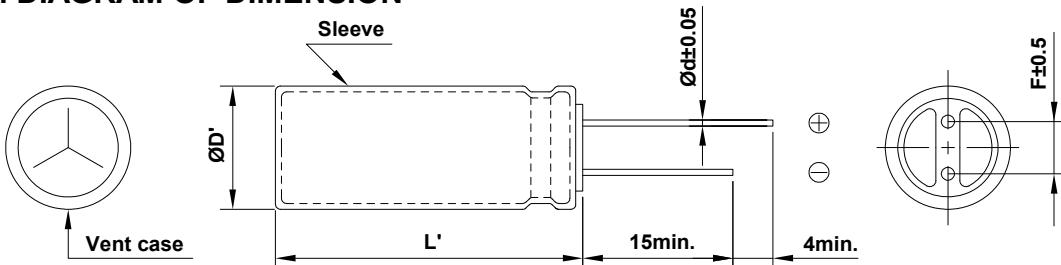
RATING

25 V 100 μ F

CASE SIZE

 \varnothing 6.3 × 11 L

A. DIAGRAM OF DIMENSION

B. MARKING: YELLOW SLEEVE & BLACK INK

| I | NXH
25 V
100 μ F

FRONT VIEW OF CAPACITOR

SAM
YOUNG
<M>105°C
LOT

BACK VIEW OF CAPACITOR

C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE	:	<u>-40 ~ +105°C</u>												
B. RATED VOLTAGE	:	<u>25 V_{dc}</u>												
C. SURGE VOLTAGE	:	<u>32 V_{dc}</u>												
D. CAPACITANCE TOLERANCE	:	<u>± 20%</u> at 20°C, 120Hz												
E. LEAKAGE CURRENT	:	Lower <u>25 μA</u> , after 2 minutes at 20°C												
F. DISSIPATION FACTOR (TANδ)	:	Lower <u>0.14</u> at 20°C, 120Hz												
G. RATED RIPPLE CURRENT	:	<u>480 mArms</u> at 105°C, 100kHz												
H. RATED RIPPLE CURRENT MULTIPLIER (Frequency Multipliers)	:	<table border="1"> <thead> <tr> <th>Freq.(Hz)</th> <th>120</th> <th>1k</th> <th>10k</th> <th>50k</th> <th>100k</th> </tr> </thead> <tbody> <tr> <td>Factor</td> <td>0.50</td> <td>0.73</td> <td>0.92</td> <td>0.95</td> <td>1.00</td> </tr> </tbody> </table>	Freq.(Hz)	120	1k	10k	50k	100k	Factor	0.50	0.73	0.92	0.95	1.00
Freq.(Hz)	120	1k	10k	50k	100k									
Factor	0.50	0.73	0.92	0.95	1.00									
I. TEMPERATURE CHARACTERISTIC (Max.Impedance ratio)	:	<table border="1"> <tr> <td>Z(-25°C) / Z(20°C)</td> <td>2</td> </tr> <tr> <td>Z(-40°C) / Z(20°C)</td> <td>3</td> </tr> </table> <p style="text-align: right;">(at 120Hz)</p>	Z(-25°C) / Z(20°C)	2	Z(-40°C) / Z(20°C)	3								
Z(-25°C) / Z(20°C)	2													
Z(-40°C) / Z(20°C)	3													

J. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the ripple current is applied

(the peak voltage shall not exceed the rated voltage) for 6,000 hours at 105°C.

Capacitance change \leq ±25 % of the initial value

Tanδ \leq 200 % of the initial specified value

Leakage Current \leq The initial specified value

K. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurement.

Capacitance change \leq ±25 % of the initial value

Tanδ \leq 200 % of the initial specified value

Leakage Current \leq The initial specified value

L. CLEANING CONDITIONS : Non-solvent proof

M. OTHERS : Satisfied characteristics KS C IEC 60384-4

* IMP(20°C, 100kHz) : 0.13 (Ω) ↓



Sam Young Electronics Co., Ltd.