

# ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

NXH 63 VB 1000 (M)

SERIES

NXH


RATING

63 V 1000  $\mu$ F


CASE SIZE

$\varnothing$  16 × 25 L

## A. DIAGRAM OF DIMENSION

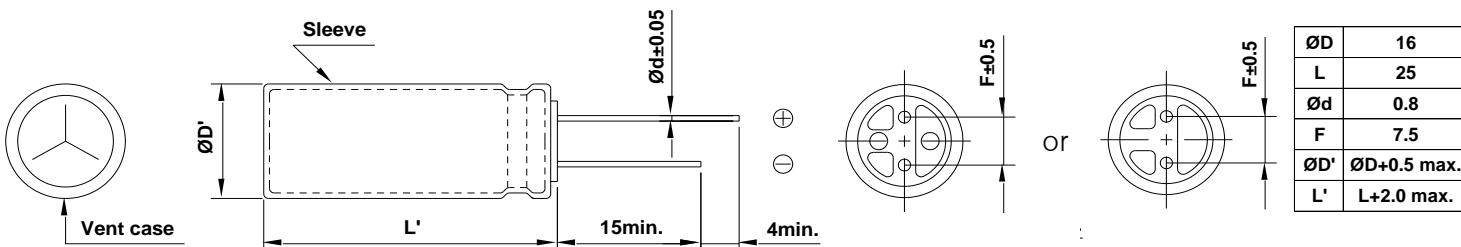

## B. MARKING: YELLOW SLEEVE & BLACK INK

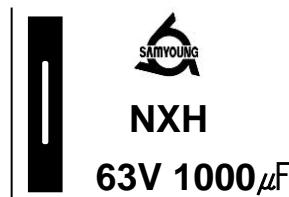

FRONT VIEW OF CAPACITOR

DATE CODE  
<M>105°C

or <M>105°C

LOT NO

BACK VIEW OF CAPACITOR

## C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE	:	-40 ~ +105 °C												
B. RATED VOLTAGE	:	63 V <sub>DC</sub>												
C. SURGE VOLTAGE	:	79 V <sub>DC</sub>												
D. CAPACITANCE TOLERANCE	:	±20% at 20°C, 120Hz												
E. LEAKAGE CURRENT	:	Lower 630 $\mu$ A, after 2 minutes at 20°C												
F. DISSIPATION FACTOR (TAN δ)	:	Lower 0.09 at 20°C, 120Hz												
G. RATED RIPPLE CURRENT	:	2430 mArms at 105°C, 100kHz												
H. RATED RIPPLE CURRENT MULTIPLIERS (Frequency Multipliers)	:	<table border="1"> <tr> <td>Freq.(Hz)</td> <td>120</td> <td>1k</td> <td>10k</td> <td>50k</td> <td>100k</td> </tr> <tr> <td>Factor</td> <td>0.60</td> <td>0.80</td> <td>0.96</td> <td>0.97</td> <td>1.00</td> </tr> </table>	Freq.(Hz)	120	1k	10k	50k	100k	Factor	0.60	0.80	0.96	0.97	1.00
Freq.(Hz)	120	1k	10k	50k	100k									
Factor	0.60	0.80	0.96	0.97	1.00									
I. TEMPERATURE CHARACTERISTIC (Max. Impedance ratio)	:	<table border="1"> <tr> <td>Z(-25°C) / Z(20°C)</td> <td>2</td> </tr> <tr> <td>Z(-40°C) / Z(20°C)</td> <td>3</td> </tr> </table> <span style="font-size: small;">(at 120Hz)</span>	Z(-25°C) / Z(20°C)	2	Z(-40°C) / Z(20°C)	3								
Z(-25°C) / Z(20°C)	2													
Z(-40°C) / Z(20°C)	3													

J. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after the rated voltage with the rated ripple current is applied

(the peak voltage shall not exceed the rated voltage) for 10,000 hours at 105 °C.

# Capacitance change ≤ ±25 % of the initial value

# Tan δ ≤ 200 % of the initial specified value

# Leakage Current ≤ The initial specified value

K. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after exposing them for 1,000 hours at 105 °C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.

# Capacitance change ≤ ±25 % of the initial value


# Tan δ ≤ 200 % of the initial specified value

# Leakage Current ≤ The initial specified value

L. CLEANING CONDITIONS ; Non-Solvent proof

M. OTHERS : Satisfied characteristics KS C IEC 60384-4

\* IMP.(20 °C, 100kHz) : 0.030  $\Omega$  ↓

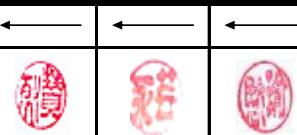

SamYoung Electronics Co., Ltd.