

## ALUMINUM ELECTROLYTIC CAPACITORS


APPROVAL NO.

12323

NXQ 35 VB 330 (M)

SERIES	NXQ
RATING	35 V 330 $\mu$ F
CASE SIZE	$\varnothing$ 10 x 12.5 L

## A. DIAGRAM OF DIMENSION

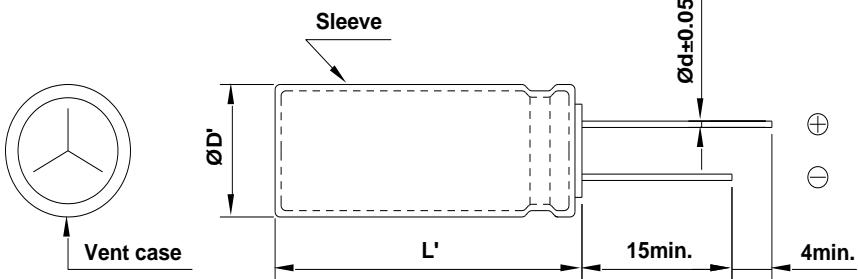

[UNIT : mm]

$\varnothing$ D	10
L	12.5
$\varnothing$ d	0.6
F	5.0
$\varnothing$ D'	$\varnothing$ D+0.5 max.
L'	L+2.0 max.

## B. MARKING : DARK BROWN SLEEVE &amp; SILVER INK

NXQ  
35 V  
330  $\mu$ F

SAM  
YOUNG  
<M> 105 °C

LOT NO

FRONT VIEW OF CAPACITOR

BACK VIEW OF CAPACITOR

## C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE

: -40 ~ +105 °C

B. RATED VOLTAGE

: 35 V<sub>DC</sub>

C. SURGE VOLTAGE

: 44 V<sub>DC</sub>

D. CAPACITANCE TOLERANCE

: ±20% at 20 °C, 120Hz

E. LEAKAGE CURRENT

: Lower 115.5  $\mu$ A, after 2 minutes at 20 °C

F. DISSIPATION FACTOR (TANδ)

: Lower 0.12 at 20 °C, 120Hz

G. RATED RIPPLE CURRENT

: 1700 mArms at 105 °C, 100kHz

H. RATED RIPPLE CURRENT MULTIPLIERS  
(Frequency Multipliers)

Freq.(Hz)	120	1k	10k	50k	100k
Factor	0.55	0.77	0.94	0.96	1.00

I. TEMPERATURE CHARACTERISTIC  
(Max. Impedance ratio)

Z(-25 °C) / Z(20 °C)	2
Z(-40 °C) / Z(20 °C)	3

(at 120Hz)

J. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 9,000 hours at 105 °C.

# Capacitance change ≤ ±25 % of the initial value

# Tanδ ≤ 200 % of the initial specified value

# Leakage Current ≤ The initial specified value

K. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after exposing them for 500 hours at 105 °C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.

# Capacitance change ≤ ±25 % of the initial value

# Tanδ ≤ 200 % of the initial specified value

# Leakage Current ≤ The initial specified value

L. CLEANING CONDITIONS : Non-solvent proof

M. OTHERS : Satisfied characteristics KS C IEC 60384-4

※ IMP.(20 °C, 100kHz) : 0.053 ( $\Omega$ ) ↓

Sam Young Electronics Co., Ltd.