ROPLA 2018.08.29

# **ALUMINUM ELECTROLYTIC CAPACITORS**

APPROVAL NO.


9309

## RDC 50 VS 10000 (M)

SERIES	RDC
RATING	50 V 10000 <i>µ</i> F
CASE SIZE	Ø 25.4 × 50 L


### A. DIAGRAM OF DIMENSION

[UNIT:mm]

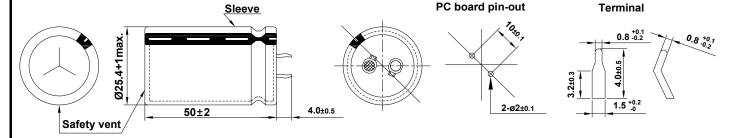

#### B. MARKING: BLACK SLEEVE & SILVER INK

< VIEW OF CAPACITOR >







< LOT No. : Sleeve or bottom plate marking. >

1234

①:The ending figure of manufactured year in A.D.

or (1)(2) ②:Manufactured month(1,2,3,...,9,O,N,D) ③:Manufactured day (A,B,C,...,Z,a,b,c,d,e)

(1)(2) (3)(4)

4:SAMYOUNG's Korea : 1, China : <1>

< DATE CODE: Sleeve marking. >

(1)(2)(3)(4)

 $\ensuremath{\texttt{1}}\xspace$  : The ending of A.D.

34:WEEKS: 01 ~ 52

#### C. ELECTRICAL CHARACTERISTICS

< FRONT >

A. OPERATING TEMPERATURE RANGE : <u>-40</u> ~ <u>+85℃</u>

B. RATED VOLTAGE :  $50 \text{ V}_{DC}$ C. SURGE VOLTAGE :  $63 \text{ V}_{DC}$ 

D. CAPACITANCE TOLERANCE :  $\pm 20\%$  at (20 °C, 120 Hz)

E. LEAKAGE CURRENT : Lower 3000 μA, after 5 minutes at 20 °C

F. DISSIPATION FACTOR (Tan $\delta$ ) : Lower <u>0.30</u> at 20 °C, 120 Hz G. RATED RIPPLE CURRENT : <u>4.78 Arms</u> at 85 °C, 120 Hz H. TEMPERATURE CHARACTERISTIC : Z(-25 °C) / Z(20 °C) 2

(Max. Impedance ratio)

(Max. Impedance ratio)

Z(-25℃) / Z(20℃)	2
Z(-40℃) / Z(20℃)	6

(at 120Hz)

after the rated voltage is applied for  $\underline{2,000}$  hours at  $\underline{85 \, ^{\circ}C}$ .

# Capacitance change  $: \leq \underline{\pm 20 \, \%}$  of the initial value

# Tan $\delta$  :  $\leq 200 \%$  of the initial specified value

# Leakage current : ≤ The initial specified value

after exposing them at 85℃ for 1,000 hours without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,

at least 24 hours and not more than 48 hours before the measurements.

# Capacitance change :  $\leq \pm 20 \%$  of the initial value

# Tan $\delta$  :  $\leq 200 \%$  of the initial specified value

# Leakage current : ≤ The initial specified value

K. CLEANING CONDITIONS: Non-solvent proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4

