
ROPLA 2019.06.07


ALUMINUM ELECTROLYTIC CAPACITORS APPROVAL NO. 10025 SERIES RFA

RFA 450 BD 3300 (M)

SERIES	RFA	
RATING	450 V 3300 μF	
CASE SIZE	Ø 76.5 × 100 L	

A. DIAGRAM OF DIMENSION

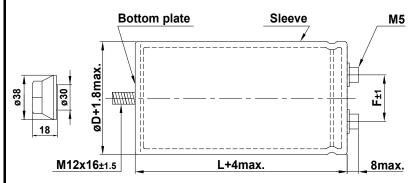

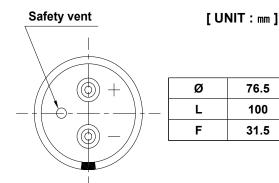

B. MARKING: BLACK SLEEVE & GOLD INK





RFA 450 V 3300 ⊬F (M) 85 ℃

FRONT VIEW OF CAPACITOR

< SLEEVE or BOTTOM PLATE or LABEL MARKING >

- 1 2 3 4
- ① The ending figure of manufactured year in A.D
- ② Manufactured month(1,2,3....9,O,N,D)
- 3 Manufactured day (A,B,C,....Z,a,b,c,d,e)
- SAMYOUNG's symbol NO(1)

C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE : $\frac{-25}{450} \sim \frac{+85 \, ^{\circ}}{V_{DC}}$ B. RATED VOLTAGE : $\frac{450}{500} \sim \frac{1}{V_{DC}}$ C. SURGE VOLTAGE : $\frac{500}{500} \sim \frac{1}{V_{DC}}$

D. CAPACITANCE TOLERANCE : ±20% (at 20℃, 120Hz)

E. LEAKAGE CURRENT : Lower 5000 μA, after 5 minutes at 20 ℃

F. DISSIPATION FACTOR (Tan δ) : Lower 0.25 at 20 °C, 120 Hz G. RATED RIPPLE CURRENT : 13.4 Arms at 85 °C, 120 Hz

H. TEMPERATURE CHARACTERISTICS

(CAPACITANCE CHANGE RATIO) : $C(-25^{\circ})/C(20^{\circ}) \ge 0.7$ (at 120 Hz)

I. INSULATION WITHSTANDING VOLTAGE:

When a voltage of $2,000V_{AC}$ is applied for one minute between the terminals shorted each other and the mounting clamp on the insulating sleeve covering the case, there shall not be electrical damage.

J. LOAD LIFE: The following specifications shall be satisfied when the capacitors are restored to 20°C. after the voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) 20,000 hours at 85°C.

Capacitance change $\leq \pm 30 \%$ of the initial value

Tan δ $\leq 300 \%$ of the initial specified value

Leakage current $\leq \overline{\text{The initial specified value}}$

K. SHELF LIFE: The following specifications shall be satisfied when the capacitors are restored to 20℃, after exposing them at 85℃ for 500 hours without voltage applied.

The rated volage shall be applied to the capacitors for a minimum of 30 minutes,

at least 24 hours and not more than 48 hours before the measurements.

Capacitance change $: \le \pm 20 \%$ of the initial value

Tan δ : $\leq 300 \%$ of the initial specified value

Leakage current : ≤ The initial specified value

L. CLEANING CONDITIONS: Non-solvent proof

M. OTHERS : Satisfied charateristics KS C IEC 60384-4

→	←	←
	意の	

