
ROPLA 2018.09.06

A. DIAGRAM OF DIMENSION

[UNIT:mm]

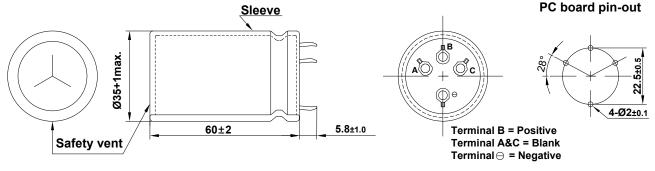

B. MARKING: BROWN SLEEVE & SILVER INK

< VIEW OF CAPACITOR >



TDA 400∨ 1000*µ*F (M)105℃

DATE CODE or LOT No.

<BACK >

< LOT No. : Sleeve or bottom plate marking. >

①②③④

Or
①:The ending figure of manufactured year in A.D.
②:Manufactured month(1,2,3,...,9,O,N,D)
③:Manufactured day (A,B,C,...,Z,a,b,c,d,e)

4:SAMYOUNG's symbol No. Korea : 1, China : <1>

< DATE CODE : Sleeve marking. >

(3)(4)

①②:YEAR : The ending of A.D. ③④:WEEKS : 01 ~ 52

C. ELECTRICAL CHARACTERISTICS

< FRONT >

A. OPERATING TEMPERATURE RANGE : $-25 \sim \pm 105$ °C

B. RATED VOLTAGE : $\frac{400 \text{ V}_{DC}}{200 \text{ SURGE VOLTAGE}}$: $\frac{450 \text{ V}_{DC}}{200 \text{ SURGE VOLTAGE}}$

D. CAPACITANCE TOLERANCE : $\pm 20\%$ at (20 °C, 120 Hz)

E. LEAKAGE CURRENT : Lower 3000 ∠A, after 5 minutes at 20 ℃

F. DISSIPATION FACTOR (Tan δ) : Lower <u>0.20</u> at 20 °C, 120 Hz G. RATED RIPPLE CURRENT : <u>2.59 Arms</u> at 105 °C, 120 Hz

H. TEMPERATURE CHARACTERISTIC

(Max. Impedance ratio) Z(-25℃) / Z(20℃) 4 (at 120Hz)

after the rated voltage is applied for 2,000 hours at 105 °C.

Capacitance change : $\leq \pm 20$ % of the initial value

Tan δ : $\leq 200 \%$ of the initial specified value

Leakage current : ≤ The initial specified value

J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C

after the expoing them at 105°C for 1,000 hours without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,

at least 24 hours and not more than 48 hours before the measurements.

Capacitance change : $\leq \pm 20 \%$ of the initial value

Tanδ : ≤ 200 % of the initial specified value

Leakage current : ≤ The initial specified value

K. CLEANING CONDITIONS: Non-solvent proof

L. OTHERS : Satisfied charateristics KS C IEC 60384-4

