2018.10.17 **ROPLA**

ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

9447

TLG 400 **VS** 220 (M)


SERIES	TLG		
RATING	400 V 220 μF		
CASE SIZE	Ø 22 × 45 L		

A. DIAGRAM OF DIMENSION

[UNIT:mm]


PC board pin-out

Terminal

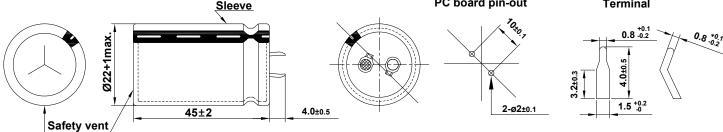

B. MARKING: BROWN SLEEVE & SILVER INK

< VIEW OF CAPACITOR >







< BACK >

< LOT No. : Sleeve or bottom plate marking. >

(1)(2)(3)(4)or (1)(2)

- ①:The ending figure of manufactured year in A.D. 2:Manufactured month(1,2,3,...,9,O,N,D) 3:Manufactured day (A,B,C,...,Z,a,b,c,d,e)
- 4:SAMYOUNG's symbol No. (3)(4) Korea : 1, China : <1>

< DATE CODE : Sleeve marking. >

(1)(2)(3)(4)

<u>-40</u> ~ +105℃

400 V_{DC} 450 V_{DC} 1) 2:YEAR: The ending of A.D. 34:WEEKS: 01~52

C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE

B. RATED VOLTAGE C. SURGE VOLTAGE

D. CAPACITANCE TOLERANCE ± 20% at (20°C, 120Hz)

E. LEAKAGE CURRENT Lower 890 µA, after 5 minutes at 20 ℃

F. DISSIPATION FACTOR (Tanδ) Lower 0.15 at 20 ℃, 120Hz **G. RATED RIPPLE CURRENT** 1.44 Arms at 105℃, 120Hz

H. TEMPERATURE CHARACTERISTIC

(Max. Impedance ratio)

Z(-25℃) / Z(20℃)	4	
Z(-40 °C) / Z(20 °C)	8	(at 120Hz)

I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C

after the rated voltage with the rated ripple current is applied (the peak voltage shall not

exceed the rated voltage) for 3,000 hours at 105℃.

Capacitance change $\leq \pm 20 \%$ of the initial value

Tanδ ≤ 200 % of the initial specified value

Leakage current ≤ The initial specified value

J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C

after the exposing them at 105°C for 1,000 hours without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,

at least 24 hours and not more than 48 hours before the measurements.

Capacitance change $\leq \pm 20 \%$ of the initial value

 \leq 200 % of the initial specified value # Tanδ

Leakage current ≤ The initial specified value

K. CLEANING CONDITIONS: Non-solvent proof

: Satisfied characteristics KS C IEC 60384-4 L. OTHERS

