EDLC 2.5V 220F




FEATURES

Electric double layer capacitor
Higher power density with ultra low ESR
Semi-permanent, quick charge and discharge than batteries
Suitable for short-term peak power assistance application
UL and ISO/TS certificated, RoHS compliant
Radial design with 2-pin snap-in terminal type



DIMENSIONS

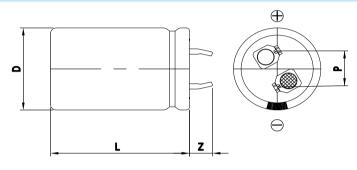

Dimensions in mm						
D +1.5 Max	L ± 2.0	Z ± 1.0	P ± 0.2			
Ф25.0	60.0	6.0	10.0			

This drawing is not to be scaled.

SPECIFICATIONS

Part Number	Rated Voltage, V _R	Rated Capacitance	AC ESR 1kHz	DC IR	Maximum Current	Leakage Current	Stored Energy	Dimension D x L	Weight
	(V)	(F)	$(m\Omega)$	$(m\Omega)$	(A)	(mA)	(J)	(mm)	(g)
VEC 2R5 227 QG	2.5	220.	14.00	22.00	47.	0.440	687.5	25.0 x 60.0	38.5

^{*} Maximum Current: 1 second discharge to $1/\!\!\!/ \cdot V_R$

ltem	Characteristics	Remarks
Rated Voltage(V _R)	2.5V	
Capacitance Tolerance	-10 ~ 30%	
		Δcap ≤ 30% of initial value at 25 °C
Operating Temperature (T _{min} ~ T _{max})	-25 ~ +70 ℃	ΔESR ≤ 100% of specified value at 25 ℃
(·min ·max/		After 1,000 hours application of V_R at T_{max}
Storage Temperature	-40 ~ 70 ℃	
		Δcap ≤ 30% of initial value at 25 °C
Cycle Life	500,000 cycles	ΔESR ≤ 100% of specified value at 25 ℃
		Cycles from V_R to $1/2 \cdot V_R$ under constant current at 25°C
	2 years	Δcap ≤ 10% of initial value at 25 °C
Shelf Life		ΔESR ≤ 50% of specified value at 25 °C
		Without electrical charge under T _{max}



Tel: +82-31-455-3064 E-mail: hycap@vina.co.kr Web: www.vina.co.kr Design and specifications are subjected to change without notice. version 9.1 on November 23, 2015