EDLC 3.0V 5F

FEATURES

Electric double layer capacitor
Higher power density with ultra low ESR
Semi-permanent, quick charge and discharge than batteries
Suitable for short-term peak power assistance application
UL and ISO/TS certificated, RoHS compliant
Radial design with lead terminal type

DIMENSIONS

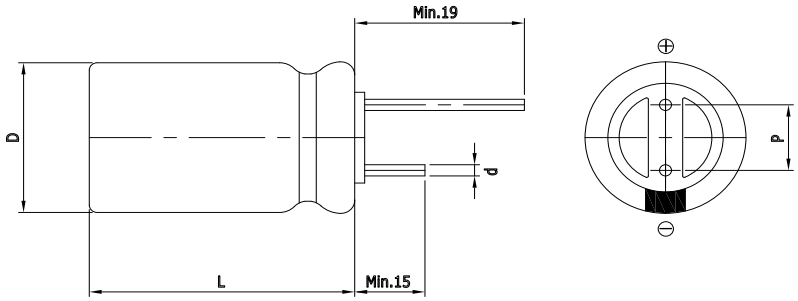

Dimensions in mm			
D +1.0 Max	L ± 1.5	d ± 0.1	P ± 0.5
Φ10.0	20.0	Φ0.6	5.0

This drawing is not to be scaled.

SPECIFICATIONS

Part Number	Rated Voltage, V_R	Rated Capacitance	AC ESR 1kHz	DC IR	Maximum Current	Leakage Current	Stored Energy	Dimension D x L	Weight
	(V)	(F)	(mΩ)	(mΩ)	(A)	(mA)	(J)	(mm)	(g)
VEC 3R0 505 QG	3.0	5.	65.00	100.00	5.	0.015	22.5	10.0 x 20.0	2.1

* Maximum Current: 1 second discharge to ½·V_R
* Leakage Current: After 72hours at V_R and 25℃

Item	Characteristics	Remarks
Rated Voltage(V_R)	3.0V	
Capacitance Tolerance	-10 ~ 30%	
Operating Temperature (T_{min} ~ T_{max})	-40 ~ +65℃	|Δcap| ≤ 30% of initial value at 25℃ |ΔESR| ≤ 100% of specified value at 25℃ After 1,000 hours application of V_R at T_{max}
Storage Temperature	-40 ~ 70℃	
Cycle Life	500,000 cycles	|Δcap| ≤ 30% of initial value at 25℃ |ΔESR| ≤ 100% of specified value at 25℃ Cycles from V_R to ½·V_R under constant current at 25℃
Shelf Life	2 years	|Δcap| ≤ 10% of initial value at 25℃ |ΔESR| ≤ 50% of specified value at 25℃ Without electrical charge under T_{max}

Tel: +82-31-455-3064 E-mail: hycap@vina.co.kr Web: www.vina.co.kr

Design and specifications are subjected to change without notice.
version 9.1 on November 23, 2015