
## 2-Serial Module 5.4V 3.5F

## FEATURES

Electric double layer capacitor 2 cells serially connected supercapacitor Semi-permanent, quick charge and discharge than batteries Suitable for smart meter or car driving recorder application UL and ISO/TS certificated, RoHS compliant Radial design with lead terminal type customized in 3 ways

## DIMENSIONS

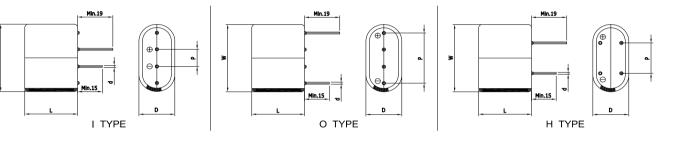

Dimensions in mm						
D +0.1 Max	W ± 1.0	L ± 1.5	d ± 0.1		P ± 0.2	
Φ10.5	21.0	22.5	Ф0.6	l: 5.5	O: 15.5 H: 10.5	

This drawing is not to be scaled.

## **SPECIFICATIONS**

Part Number	Rated Voltage, V <sub>R</sub>	Rated Capacitance	AC ESR 1kHz	DC IR	Maximum Current	Leakage Current	Stored Energy	Dimension D x W x L	Weight
	(∨)	(F)	(mΩ)	(mΩ)	(A)	(mA)	(J)	(mm)	(g)
VEC 5R4 355 QG-X	5.4	3.5	115.00	195.00	5.5	0.014	51.0	10.5 x 21.0 x 22.5	4.8

\* X is variant type code such as I, O or H.

\* Maximum Current: 1 second discharge to  $\frac{1}{2} \cdot V_R$ 

\* Leakage Current: After 72hours at  $V_{R}$  and 25  $^{\circ}\!\!\!\mathrm{C}$ 

Item	Characteristics	Remarks
Rated Voltage(V <sub>R</sub> )	5.4V	
Capacitance Tolerance	-10 ~ +30%	
		$ \Delta cap  \le 30\%$ of initial value at 25 $^{\circ}C$
Operating Temperature (T <sub>min</sub> ~ T <sub>max</sub> )	-40 ~ +65 ℃	$ \Delta ESR  \le 100\%$ of specified value at 25 °C
('min 'max/		After 1,000 hours application of $V_R$ at $T_{max}$
Storage Temperature	<b>-40 ~ 70</b> ℃	
	500,000 cycles	$ \Delta cap  \le 30\%$ of initial value at 25 °C
Cycle Life		$ \Delta ESR  \le 100\%$ of specified value at 25 °C
		Cycles from $V_R$ to $\frac{1}{2} \cdot V_R$ under constant current at 25°C
	2 years	Δcap  ≤ 10% of initial value at 25 ℃
Shelf Life		$ \Delta ESR  \le 50\%$ of specified value at 25 °C
		Without electrical charge under T <sub>max</sub>



Tel: +82-31-455-3064 E-mail: hycap@vina.co.kr Web: www.vina.co.kr Design and specifications are subjected to change without notice. version 9.1 on November 23, 2015



