2-Serial Module 5.4V 7.5F




FEATURES

Electric double layer capacitor
2 cells serially connected supercapacitor
Semi-permanent, quick charge and discharge than batteries
Suitable for smart meter or car driving recorder application
UL and ISO/TS certificated, RoHS compliant
Radial design with lead terminal type customized in 3 ways



DIMENSIONS

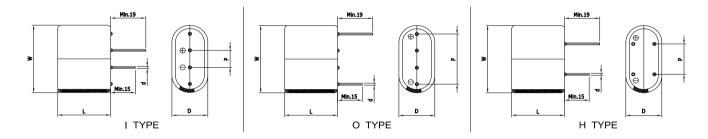

Dimensions in mm						
D +0.1 Max	W ± 1.0	L ± 1.5	d ± 0.1		P ± 0.2	
Ф13.0	26.0	28.0	Ф0.6	l: 7.5	O: 18.5 H: 13.0	

This drawing is not to be scaled.

SPECIFICATIONS

Part Number	Rated Voltage, V _R	Rated Capacitance	AC ESR 1kHz	DC IR	Maximum Current	Leakage Current	Stored Energy	Dimension D x W x L	Weight
	(V)	(F)	$(m\Omega)$	$(m\Omega)$	(A)	(mA)	(J)	(mm)	(g)
VEC 5R4 755 QG-X	5.4	7.5	55.00	85.00	12.5	0.030	109.4	13.0 x 26.0 x 28.0	9.6

^{*} X is variant type code such as I, O or H.

Item	Characteristics	Remarks
Rated Voltage(V _R)	5.4V	
Capacitance Tolerance	-10 ~ +30%	
. .		∆cap ≤ 30% of initial value at 25 ℃
Operating Temperature (T _{min} ~ T _{max})	-40 ~ +65 ℃	$ \Delta ESR $ ≤ 100% of specified value at 25 $^{\circ}$ C
(min max/		After 1,000 hours application of V_R at T_{max}
Storage Temperature	-40 ~ 70℃	
		∆cap ≤ 30% of initial value at 25 °C
Cycle Life	500,000 cycles	ΔESR ≤ 100% of specified value at 25 ℃
		Cycles from V_R to $1/2 \cdot V_R$ under constant current at 25°C
	2 years	∆cap ≤ 10% of initial value at 25 °C
Shelf Life		$ \Delta ESR $ ≤ 50% of specified value at 25 $^{\circ}$ C
		Without electrical charge under T _{max}



Tel: +82-31-455-3064 E-mail: hycap@vina.co.kr Web: www.vina.co.kr Design and specifications are subjected to change without notice. version 9.1 on November 23, 2015

^{*} Maximum Current: 1 second discharge to ½-V_R