
2-Serial Module 6.0V 1.5F

Hy#Cap

FEATURES

Electric double layer capacitor 2 cells serially connected supercapacitor Semi-permanent, quick charge and discharge than batteries Suitable for smart meter or car driving recorder application UL and ISO/TS certificated, RoHS compliant Radial design with lead terminal type customized in 3 ways

DIMENSIONS

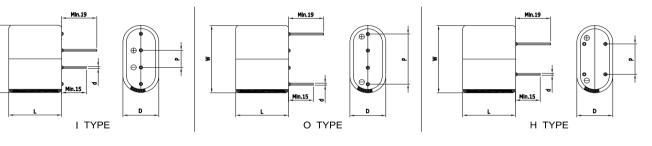

Dimensions in mm						
D +0.1 Max	W ± 1.0	L ± 1.5	d ± 0.1		P ± 0.2	
Ф8.5	17.0	22.0	Ф0.6	l: 4.7	O: 12.3	H: 8.5

This drawing is not to be scaled.

SPECIFICATIONS

Part Number	Rated Voltage, V _R	Rated Capacitance	AC ESR 1kHz	DC IR	Maximum Current	Leakage Current	Stored Energy	Dimension D x W x L	Weight
	(∨)	(F)	(mΩ)	(mΩ)	(A)	(mA)	(J)	(mm)	(g)
VEC 6R0 155 QG-X	6.0	1.5	145.00	215.00	3.5	0.010	27.0	8.5 x 17.0 x 22.0	3.3

* X is variant type code such as I, O or H.

* Maximum Current: 1 second discharge to $\frac{1}{2} \cdot V_R$

* Leakage Current: After 72hours at V_{R} and 25 $^{\circ}\!\!\!\!^{\circ}\!\!\!^{\circ}$

ltem	Characteristics	Remarks
Rated Voltage(V _R)	6.0V	
Capacitance Tolerance	-10 ~ +30%	
		∆cap ≤ 30% of initial value at 25 ୯
Operating Temperature (T _{min} ~ T _{max})	-40 ~ +65 ℃	$ \Delta ESR \le 100\%$ of specified value at 25 $^{\circ}$ C
(•min •max/		After 1,000 hours application of V_R at T_{max}
Storage Temperature	-40 ~ 70 ℃	
	500,000 cycles	∆cap ≤ 30% of initial value at 25 ୯
Cycle Life		$ \Delta ESR \le 100\%$ of specified value at 25 $^{\circ}$ C
		Cycles from V _R to $1/2 \cdot V_R$ under constant current at 25°C
	2 years	∆cap ≤ 10% of initial value at 25 ୯
Shelf Life		$ \Delta ESR \le 50\%$ of specified value at 25 $^{\circ}$ C
		Without electrical charge under T _{max}



Tel: +82-31-455-3064 E-mail: hycap@vina.co.kr Web: www.vina.co.kr Design and specifications are subjected to change without notice. version 9.1 on November 23, 2015

