## CRYSTAL UNIT HC-49US DIP














#### **Features**

- Industrial Control Consumers.
- **–** Dimensions:11.5 x 4.50 x3.68 mm.
- Frequency range:3.2768~64MHz
- A great number of standard frequencies.




## **Specifications**

Standard Frequency	3.2768~64 MHz		
Vibration Mode	AT Fundamental		
Load Capacitance	12pF, 20pF, or specify		
Frequency Tolerance (at 25 ℃ )	±10ppm, ±20ppm, or specify		
Frequency Versus Temperature Characteristics	±20ppm, or specify		
Operating Temperature	-20~+70°C,-40~+85°C,or specify		
Storage Temperature	-40~+85℃ or specify		
Shunt Capacitance	7 pF Max.		
Level of Drive	1∼500µWMax.(100uW typical)		
Aging (at 25 $^{\circ}\mathrm{C}$ )	±3ppm/year Max.		

## Equivalent Series Resistance(ESR)

Fundamental			
3.2768 ~ 4MHz	180 Ω Max.	6 ~ 17 MHz	80 Ω Max.
4 ~ 5MHz	120 Ω Max.	7 ~ 10 MHz	60 Ω Max.
5 ~ 6 MHz	100 Ω Max.	10 ~ 27MHz	40 Ω Max.
3rd Overtone			
20 ~ 25 MHz	100 Ω Max.	25 ~ 64 MHz	80 Ω Max.

## Dimensions and Patterns [unit:mm]

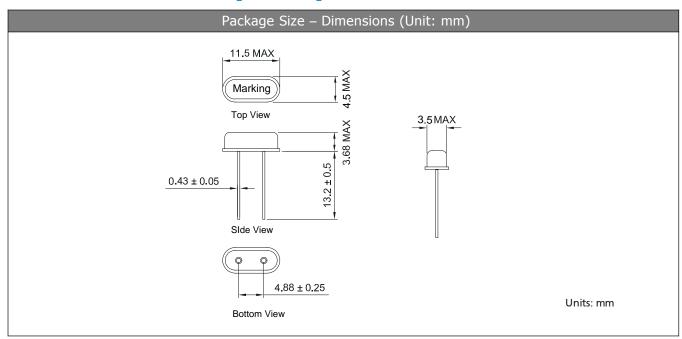

# CRYSTAL UNIT HC-49US DIP









### Solder ability

Dip terminals in RMA flux for5±0.5 seconds. Under room temperature. Dip terminals in a 260±5℃ solder bath for  $5\pm0.5$  seconds. The solder shall leave an undipped terminal length of 2 mm at their base .

### Resistance to Soldering Heat

Dip terminals in a 260±5°C solder bath for 10±0.5 seconds. The solder shall leave an undipped terminal length of 2 mm at their base.

#### **Packing**

Deposit 200 pieces of the quartz crystal units in a polyethylene bag, and pack enough bags in a packing case to make a 10,000 pieces package. The packing format may be subject to change by quantity.