



Name: Lithium-Ion Rechargeable Battery

Model: AKYGA AKY1877

SPEC: 3.7V / 5300mAh

Number: LP923962-1S2P

Specification Modification Records

Modification Time	Descriptions	Issued Date	Approved By
	Release 1	2024-01-16	

Content

Any copies are invalid without our company's approval



1. Scope

This document describes the product specification and using condition of the Lithium-ion Polymer rechargeable cell supplied by Akyga battery

2. Product

2.1 Name: Lithium-ion polymer rechargeable cell


2.2 Battery Model: 923963-2P

3. Specification

	ltem			Specification
3.1	Nominal voltage	3.7	V	
3.2	Typical capacity	5300	mAh	at room temperature of 25±2°C discharge from 4.2V to 4.2V at 0.2C mA
	Minimal capacity	5200	mAh	
3.3	Initial impedance	≤ 160	mΩ	The Specifications included cell;PCM;wire
3.4	Full charge voltage	4.20±0.02	V	
3.5	Pack Voltage	3.8-4.1	V	As of shipment.
3.6	Standard charge current	1060	mA	
3.7	Max charge current	2650	mA	
3.8	Charging method	cc/ cv		charge with constant current 0.2C to 4.2V, then charge with constant voltage 4.2V till charge current is less than 0.01C
3.9	Standard discharging current	1060	mA	
3.10	Max discharge current	2650	mA	
3.11	Discharge cut-off voltage	3.00	V	
3.12	Operating environment:	Chargin 65 ± 20 Discha)%RH	10°C ~ 15°C MAX Charge current: 0.2C 15°C ~ 45°C MAX Charge current: 0.5C
		Discria	ıgılıg	-10℃~60℃;65±20%RH
3.13	Storage environment	-10°C~25 65±20%R		storage for a long time(\geqslant 3months) and the storage condition shall be: \le 25 °C; 65±20%RH; 3.7~3.9V
3.14	Pack Weight (Approx)	48.0	g	



4.1 Outward appearance and Dimension

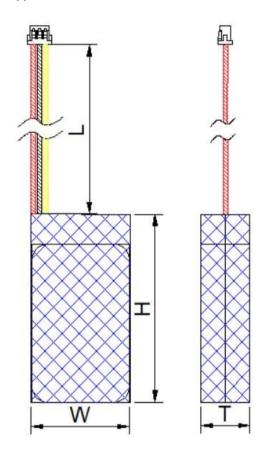

mm	
	Max: 19.0
	Max: 39.5
	Max: 66.5
	75±5


Battery thickness expansion is $7\%~\pm~3\%$

4.2 Basis BOM List

Item	Reference	Material name	Model/Specification	Quantity	Remark
1	Cell	923963	3.7V 2650 mAh	2	
2	PCM	ZN-PCM	HY-4035 DW01+8205A*2+10KNTC	1	
3	Red wire	UL1571 AWG24#	Red	1	
4	Black wire	UL1571 AWG24#	Black	1	
5	Yellow wire	UL1571 AWG24#	Yellow	1	
6	Connector	ZH-3P	(Red-Black-Yellow)	1	




4.3 Outward appearance and Dimension

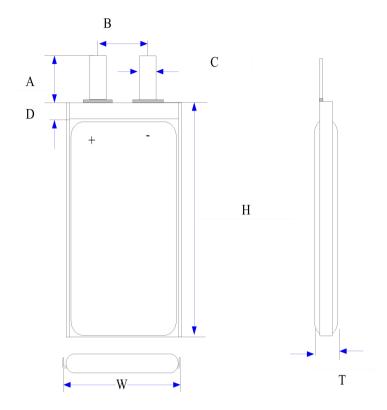

: mm	
	Max: 9.2
	Max: 39.0
	Max: 62.0
	8.0 ± 1.5
	21.0 ± 2
	4.0 ± 0.2
	3.5 ± 0.5
	双折边

Battery thickness expansion is $7\% \pm 3\%$

5.Packing drawing

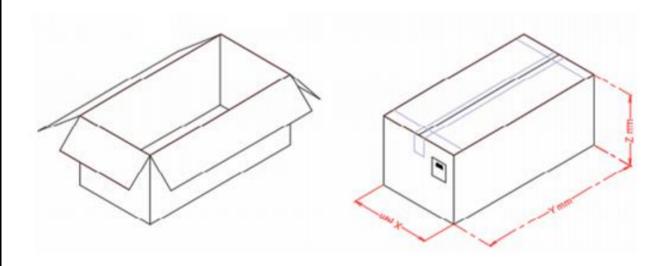

NO.	Items	Description
1	Packing style	Carton
2	Carton Sealing method	Transparent adhesive tape




5.1 PCM/

Symbol	Name	MIN	Typical.	Max	Unit
VDET1	Over-Charge detect voltage	4.25	4.3	4.35	V
VDET2	Over-discharge detect voltage	2.30	2.45	2.60	V
IEC	Excess Current threshold	4.0		9.0	А
IDD	Supply current	1	3.5	7	μΑ
RD	Internal resistance in normal operation		45	60	mΩ

5.2 BOM


1	IC	U1	DW01 /S0T-23-6	1
2	MOSFET	U2/U3	8205 /TSSOP-8	2
3	SERVICE AND A REPORT OF	R1	$100 \Omega \pm 5\%/0603$	1
4		R2	1KΩ ±5%/0603	1
5	AND THE STATE OF T	R3	NTC 10K±5%/0603	1
6	30	C1	0.1 μ F/-20%/+80%/16V/0402	1
7		B-/B+	7*3*0.3	2
8	Belong and the strengths	PCB	HY-4035	1

5.3 Schematic diagram

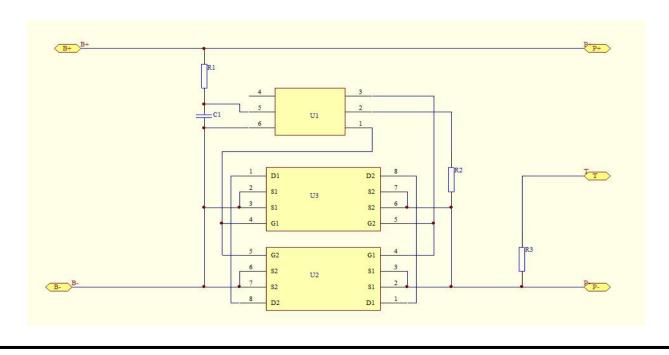




5.4. Circuit PCB diagram

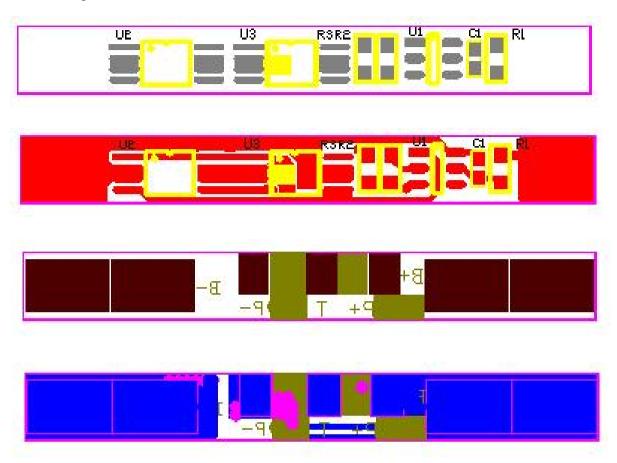

5.5. Pad description

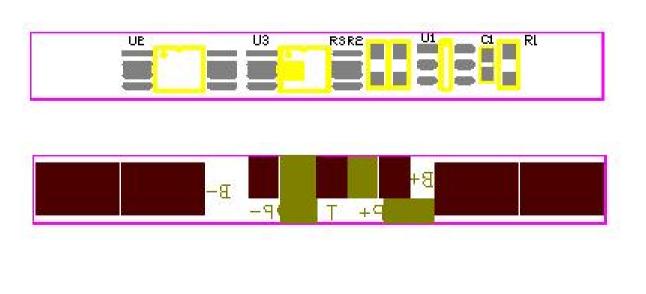



6. Visual Inspection

There shall be no such defect as scratch,flaw,crack,and leakage,which may adversely affect commercial value of the cell.

7. Cell Specification

7.1 Electrical characteristics

Items		Test Metho	od and Condition			Crit	eria
7.1.1 Full charge	charge to 4.2V with 0.2C ,then go on charging with constant voltage 4.2V till charge current declines to 0.01C .					/	
7.1.2 Initial capacity	The capacity means the discharge capacity of the cell that was discharged to 4.2V with discharge current of 0.2C within one hour after the full charge.					≥ 5200 mAh	
7.1.3 Cycle life	Cycle life is the capacity of the cell that was repeated 300 cycles with full charge and then discharging to 4.2V with discharge current of 0.2C.					≥ 80% Initial	capacity
7.1.4 Initial impedance	Cell resistance was measured at AC 1KHz after 50% charge and the test temperature was 25 $^{\circ}\!$				≤ 160 mΩ		
Temperature	under the conditable below nor	tion of normal to mal temperature 0.2C to 2.5 V dis	ast, under the cor emperature after e and high tempe charge capacity.t	full charge of the rature to the cap	e bat	tery, as show of 0.2 C to 3	wn in the 3.0 V, low
	under the conditable below nor temperature is 0	tion of normal t mal temperature 0.2C to 2.5 V dis hours.	emperature after e and high tempe	full charge of the rature to the cap	e bat pacity n char	tery, as show of 0.2 C to 3 rging and dis	wn in the 3.0 V, low
7.1.5 Temperature Capacity Test	under the conditable below nor temperature is 0 must beyond 3	tion of normal t mal temperature 0.2C to 2.5 V dis hours.	emperature after e and high tempe	full charge of the rature to the cap he time between	e bat pacity n char	tery, as show of 0.2 C to 3 rging and dis	wn in the 3.0 V, low
Temperature Capacity Test 7.1.6	under the conditable below nor temperature is 0 must beyond 3 Charge ter 25 After the full cha	tion of normal to mal temperature D.2C to 2.5 V dishours. mperature C arging, storage to	emperature after and high tempe charge capacity.t	full charge of the rature to the cap he time between Discharge ten 0°C ≥80% perature of 25°C	e bath pacity n char npera	tery, as shown of 0.2 C to 3 rging and discrete 25° C 100% Capacity $\geqslant 90\%$	wn in the 3.0 V, low scharging 60°C
Temperature Capacity Test 7.1.6 Self-discharge	under the conditable below nor temperature is 0 must beyond 3 Charge ter 25 After the full cha 28 days, then m 4.2V.	tion of normal to mal temperature 0.2C to 2.5 V dishours. Imperature Carging, storage to easure the capa	emperature after e and high tempe charge capacity.t -10°C ≥70% he cells in a temp	Discharge ten O°C ≥80% Derature of 25°C See current of 0.20	e bati pacity n char npera	of 0.2 C to 3 rging and disserting a	wn in the 3.0 V, low scharging 60°C ≥85%
Temperature	under the conditable below nor temperature is 0 must beyond 3 Charge ter 25 After the full cha 28 days, then m 4.2V.	tion of normal to mal temperature 0.2C to 2.5 V dishours. Imperature Carging, storage to easure the capa	emperature after e and high tempe charge capacity.t -10°C ≥70% he cells in a temp city with discharge	Discharge ten O°C ≥80% Derature of 25°C See current of 0.20	e bati pacity n char npera	of 0.2 C to 3 rging and disserting a	wn in the 3.0 V, low scharging 60°C ≥85%



7.2 Mechanical characteristics

Items	Test Method and Condition	Criteria
7.2.1 Vibration Test	Fixed the fully charged cell to vibration table and subjected to vibration cycling that the frequency is to be varied at the rate of 1Hz per minute between 10Hz and 55Hz, the excursion of the vibration is 0.8mm. The cell shall be vibrated for 90 ~100 minutes per axis of XYZ axes.	No explosion No fire, No leakage.
7.2.2 Drop Test	The cell was dropped freely from the height of 1000mm to the concrete floor, and each surface was dropped once	No explosion, No fire

7.3 Safety

Items	Test Method and Condition	Criteria
7.3.1 Crush Test	The pressure on the surface of the fully charged cell do not stop being raised until 17.2 Mpa when the cell is crushed by two flat surfaces.(Max13kN)	No explosion, No fire.
7.3.2 Heating	After full charging at 0.1C, put the battery in the baking oven and start , the temperature of the oven is to be raised at a rate of 5° C per minute to a temperature of $130\pm2^{\circ}$ C, remain for 10minutes at that temperature	
7.3.3 Short-Circuit Test	After full charge, the positive and negative polarities are connected together by a copper wire whose resistance is less than or equal to $80\pm20m\Omega$.	No explosion, No fire .
7.3.4 Over-charge Test	The cell is overcharged to 4.6V with a current of 3C and holded for 8 hours.	



8. Standard environmental test condition/

Unless otherwise specified, all tests stated in this Product Specification are conducted at below condition.

Temperature: 25±2℃ Relative humidity: 65±20%

9. Charging/

Charging current and charging voltage should be less than specified in the Product Specification.

The charger shall be designed to comply with Product Specification.

It is dangerous that charging with higher current or voltage than Product Specification may cause damage to the cell electrical, mechanical safety performance.

10. warranty/

Period of warranty: 12 months after sales;

Range of warranty: There is low voltage, expansion or leakage with the correct use of the cell in the period

of warranty.

11. Liability/

Please use the Lithium-ion Polymer rechargeable cells supplied by Akyga battery under the product specification .It may cause fire or expansion if the cells are used incorrect .We will not guarantee the safety unless the cells are used under the product specification.

12. Identification/

Warnings would better be marked on the surface of the battery which is tied up by certain cells:

- *Using the charger designated by the manufacturer.
- *Don't throw the battery in fire or heat it .
- *Don't short-circuit .
- *Don't unpack the battery or change its structure.



13. Notice for Designing Battery Pack

3. Notice for Designing Dattery Fack
13.1 Battery Pack design
13.1.1 Battery shell should be with enough mechanical strength, to protect the inner cell from mechanical shock
13.1.2 No cell movement in the battery pack should be allowed;
13.1.3 No Sharp edge or bulge components should be inside the pack containing the battery;
13.2 Avoid some components to contact the edge of packing foil of batteries;
13.3 Tab connection
13.3.1 Ultrasonic welding or spot welding is recommended to connect battery with PCM or other parts;
13.3.2 The tab is not very firm. Don't bend the tab especially the positive pole. It will rupture easily;
13.3.3 If apply manual solder method to connect tab with PCM, below notice is very important to ensure batter performance:
1). The solder iron should be temperature controlled and ESD safe;
2). The soldering iron temperature should be 360-420 $^{\circ}\mathrm{C}$;
3). Soldering time should not be longer than 3s;
4). Soldering times should not exceed 3 times ,secondary welding should be done after the poles are cooling;
5). Directly heat cell body is strictly prohibited;
6). Don't let the electric iron contact the surface of the cell.



Please use the battery according to the provisions as below ,Incorrect using of the battery may cause fire or expansion,and destroy its performance.

14.Warnings

Soft Aluminium Foil: The soft aluminum packing foil may be damaged by sharp matter such as Ni-tabs, pins and needles or other tooling and fixtures.

- 1) Do not strike Cells with any sharp matter.
- 2) Trim your nail or wear gloves before taking Cells.
- 3) Clean worktable to make sure that there is no sharp particle.



Top Sealing Edge: Sealing edge on the top of the Cell is very flimsy and easy to be delaminated. Do not bend or fold this area.



Tabs: The Cell tabs are easy to be broken especially for Aluminum tab. Do not bend the tabs.





Side Sealing Edge: The side sealing edge has been folded and fixed in cell forming processes and passed hermetic test. The Aluminum foil may brake by re-folding time after time. Don't open and refold this edge.



Mechanical Shock:Do not drop shock or bend Cell body




Short: Short terminal of the Cell is strictly prohibited. It may damage the Cell and result in safety accident.





Please use the battery according to the provisions as below ,Incorrect using of the battery may cause fire or expansion and destroy its performance

14.Warnings

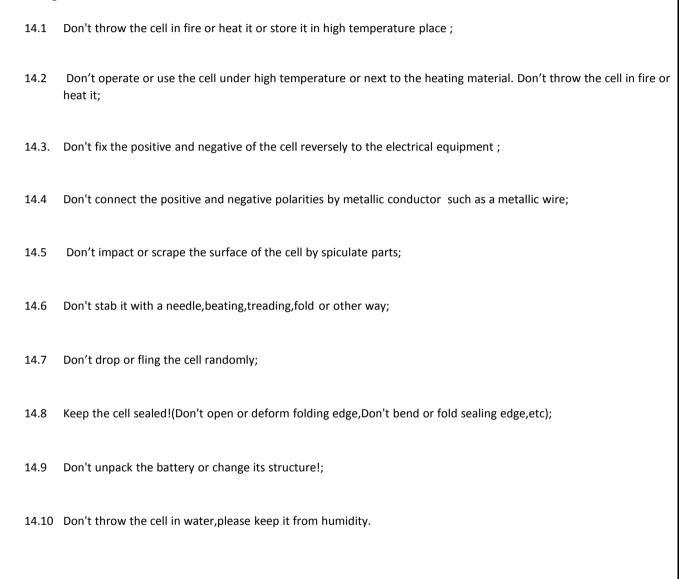

15.Attent	ion
-----------	-----

