CUSTOMER: ROPLA DISTRIBUTOR: (PE48AA1)

NO.: TC113032(1)

# APPROVE SHEET

[ Compliance with RoHS ]

PRODUCT: DC BRUSHLESS FAN

USER P/N:\_\_\_\_\_

Parts No.: JF0515B2L-011-243R

Printed model number on the stick: JF0515B2L--R

(SIGNATURE)

JAMICON GROUP KAIMEI ELECTRONIC CORP. TEL:0755-2813 5359 FAX:0755-2813 5384

所發經理

201 11 7 8

九起自

APPROVED CHECKED DRAWN

王婷

2011/03/28

### 1. MECHANICAL:


1-01	Dimension	Dimension of fan shall be shown in the outline styling drawing attached.
1-02	Motor	Four-pole motor.
1-03	Frame	Plastic material UL 94V-0 (P.B.T).
1-04	Impeller	Plastic material UL 94V-0 (P.B.T).
1-05	Free drop shock	In minute package condition, the fan should withstand each one drop of three faces from 30cm distance height onto 10 mm thickness of wooden board.

## 2.ELECTRICAL:

2-01	Rated current	Rated current shall be measured after 30 minutes continuous rotation at rated voltage.
2-02	Start voltage	The voltage that enable to start the fan by sudden switch on.
2-03	Rated Speed	Rated speed shall be measured after 30 minutes continuous rotation at rated voltage.
2-04	Input Power	Input power shall be measured after 30 minutes continuous rotation at rated voltage.
2-05	Lock Current	Locked current shall be measured Within one minute at rotor locked, after 30 minutes continuous rotation at rated voltage in clear air.
2-06	Insulation resistance	More than 10M ohm at 500 V.D.C between lead and housing.
2-07	Dielectric strength	Measured 5 mA(max) trip current at 700 V.A.C for 3 sec. between lead and housing.
2-08	Locked motor protection	Designed to meet UL, CUL and TUV.

# 3.CHARACTERISTICS:

3-01	Air Flow & Static Pressure	The air flow data and static pressures should be determined in accordance with AMCA standard or DIM 24163 specification in a double- chamber testing with intake-side measurement.
3-02	Noise level	The measurement of noise level is carried out with reference to DIM 45635 in an echoic chamber with the microphone positioned 1 M from the air intake. Testing fan shall be hung in clean air.

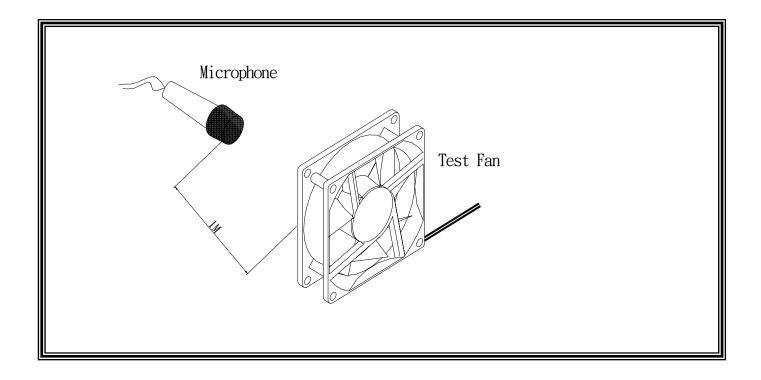

# 4.ENVIRONMENTAL:


4-01	Operating temperature	-10 $^{\circ}$ C to 70 $^{\circ}$ C (ordinary humidity)	
4-02	Storage Temperature	-40° $C$ to 70° $C$ (ordinary humidity)	
4-03	Humidity	After 96 hrs, 95% RH 40±2°C per MIL-STD-202F method 103B, Humidity test, The measured data of insulation resistance & dielectric strength should meet the specification listed in attach.	
4-04	Thermal Shock	After thermal shock test per MIL-STD-202F method 107D, Condition D, The measured data of insulation resistance & dielectric strength should the specification	

## 5.DATA-SHEET: MODEL JF0515B2L-011-243R 5-1. SPECIFICATION:

NO.	ITEM	SPECIFICATION	UNIT	CONDITION
5-1-01	Dimension	50*50*15	mm	
5-1-02	Bearing	Dual ball		
5-1-03	Rated Voltage	24.0	VDC	
5-1-04	Operating Voltage	12.0~27.6	VDC	
5-1-05	Start Voltage	12.0	VDC	On/off test
5-1-06	Speed	4500	R.P.M	±10%,At rated Speed
5-1-07	Input Current	0.06	Amp	At rated Voltage
5-1-08	Input Power	1.44	Watt	At rated Voltage
5-1-09	Nominal Current	0.11	Amp	At rated Voltage
5-1-10	Air Flow	13.03	CFM	At 0 static Pressure of Rated speed
5-1-11	Static Pressure	0.139	inchH₂O	At 0 air flow of rated speed
5-1-12	Noise	28.6	dBA	At rated speed
5-1-13	Life Expectancy(L10)	80,000	Hours	At 40℃
5-1-14	Motor protection	Impedance protecte	d	·
5-1-15	Polarity protection	It will not damage the fan while reverse input.		
5-1-16	Auto Restart	NO		
5-1-17	Speed Signal output	NO		
5-1-18	Alarm Signal output	NO		
5-1-19	Rotation direction	From the label side		Clockwise
5-1-20	Weight	29	Gram	Per each piece
5-1-21	Safety Certificate	UL, CUL, TUV, CE		

### 5-2. LEAD WIRE:

NO.	ITEM	CONDITION			
5-2-01	AWG NO. & Authorize	26 AWG, UL1007			
5-2-02	Color	—	+		
		Black	Red		
5-2-03	Line Length	275±10mm			
5-2-04	Connector	Notes as: Not available			
5-2-05	Tube	NO			

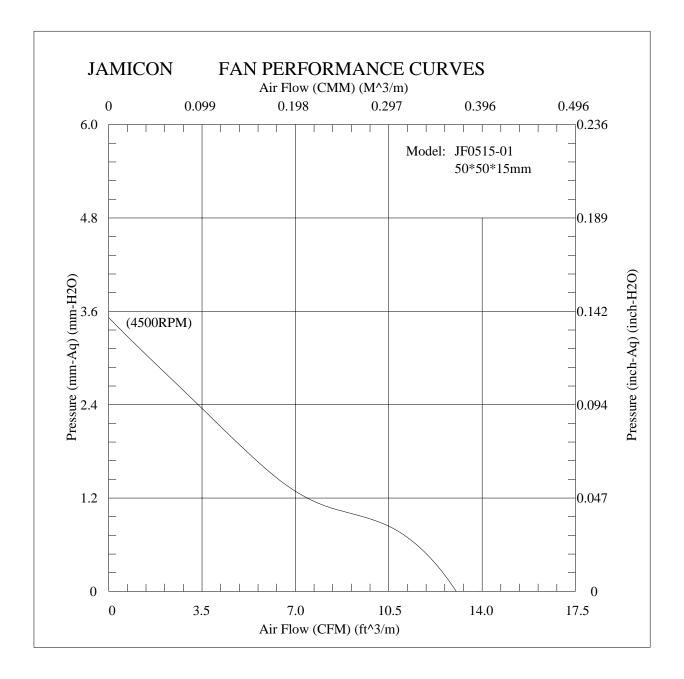

## 風扇振動噪音性能測試報告

(The Test Report of Fan Vibration and Noise)

PRAS

BURLINI Plow)

0(1.45)

#### 國扇型號(Sample Type): JF0515

基本規格(Properities): DC 24V 7葉 4極 4500RPM

#### 润試條件(Test Conditions)

輸入電壓(Input Voltage):	24 V
畫潮時間(Measuring Time):	20 sec
麥克氟距離(Mic. Distance):	100 cm
委克亂角度(Mic. Angle):	180° A(1807) 73
積域加權(Freq. Weighting):	A 4
時城加權(Time Weighting):	SLOW
背景噪音(Background Noise):	15.0 dB(A)
濕度(Temperature):	ĩ
相對濕度(Relative Humidity):	"死











測試日期(Test Date): 2003/6/23 AM 11:24:14 測試編號(Test No.): (3)

#### 潮試結果(Test Results)

電壓(Passing Voltage): 電流(Electric Current):

消耗功率(Power Dissipation):


轉達(Rotation Speed): 4500 RPM


振動量(Vibration Level) (依據 ISO 2372)

振動速度(Vib. Velocity): 0.32 mm/sec RMS

均能增整位準(Time-averaged SPL, Leg) (依據 CNS 8753)


量割點(At Meas. Point):	28.8 dB(A)
] 米逸(At 1m Point):	28.6 dB(A)
战大聲壓位準(MaxL):	29.0 dB(A)
最小聲壓位準(MinL):	26.9 dB(A)

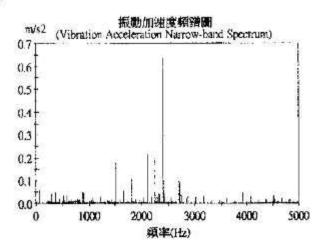

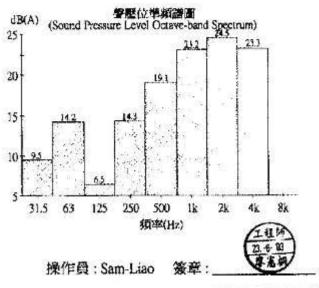

2003/5/23 PM 01:18:20 列印

#### KAIMEI ELECTRONIC CORP.

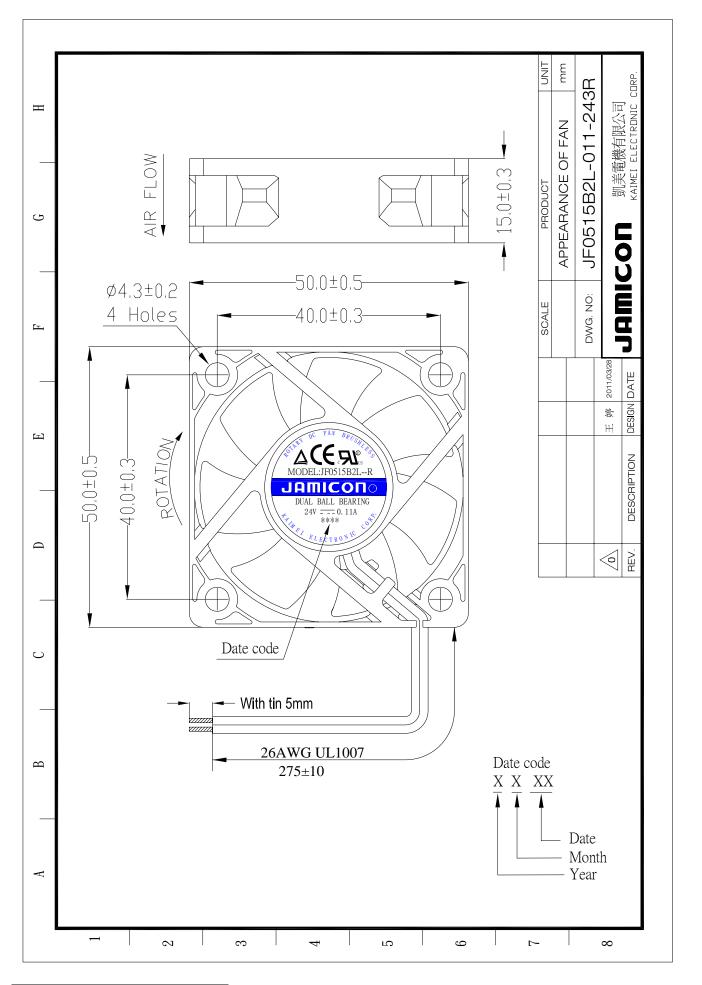



#### GPWV2.E156480 Fans, Electric - Component

Page Bottom

#### Fans, Electric - Component

See General Information for Fans, Electric - Component

#### KAIMEI ELECTRONIC CORP

E156480

13TH 81 HSIN-TAI-WURD, SEC 1 HSICHIH, TAIPEI HSIEN 221 TAIWAN

AC fans, Models MA0825H2Bzz, MA0825H2Szz, MA0825M2Bzz, MA0825M2Szz, MA08325M2Szz, MA0838H2Bzz, MA083H2Szz, MA0838H2Bzz, MA0838M2Szz, MA0925H2Bzz, MA0925H2Szz, MA0925H2Szz, MA0925H2Szz, MA0938H2Szz, MA0938H2Bzz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA0938H2Szz, MA1225H2Szz, MA1225H2Szz, MA1225H2Szz, MA1225H2Szz, MA1225H2Szz, MA1225H2Szz, MA1225H2Szz, MA1338H2Szz, MA1338H1Szz, MA0838H1Szz, MA0838H1Szz, MA0838H1Szz, MA0838H1Szz, MA0938H1Szz, MA0938H1Szz, MA0938H1Szz, MA0938H1Szz, MA0938H1Szz, MA0938H1Szz, MA1225H1Szz, MA1225H1Szz, MA1225H1Szz, MA1338H1Szz, MA

Models JA1751H1, JA1751H2, JA1238H1, JA1238H2, JA1238-1H1, JA1238-1H2, JA1225H1, JA1225H2, JA0925H1, JA0925H2, JA0838H1, JA0838H2, JA0825H1, JA0825H2,

Model KAX (A) (B)  $X_1$  and/or  $X_2$ , where X may be 0825, 0838, 0925, 1225, 1238 or 1751, (A) may be H1, H2, M1, M2, L1 or L2, (B) may be B or S and  $X_1$ ,  $X_2$  may be 0 thru 9, A thru 2, blank or "-"; Model MAX (A) (B)  $X_1$  and/or  $X_2$ , where X may be 1238, 1538, 1738, 1751, 1755 or 2589, (A) may be H1, H2, M1 or M2, (B) may be B, S and  $X_1$ ,  $X_2$  may be 0 thru 9, A thru 2 or "-".

 $\begin{array}{l} \mbox{Models JA1238(a)(c)(b)(x)(y), JA1238HD(b)(x)(y), KA1238(a)(c)(b)(x)(y), KA1238HD(b)(x)(y) \mbox{ series, where (a) may be H, M or L, (c) may be 1 or 2, (b) may be B or S, (x) and (y) may be blank, "-", 0 thru 9 or A thru 2. \end{array}$ 

 $\begin{array}{l} \label{eq:models} \mbox{Models} \mbox{JA1225H1}(b)(x)(y), \mbox{JA1225H1}(b)(x)(y), \mbox{JA1225H1}(b)(x)(y), \mbox{JA1225H2}(b)(x)(y), \mbo$ 

Models JA1751H1(b)(x)(y), JA1751H2(b)(x)(y) series, where (b) may be S or B, (x) and (y) may be blank, "-", 0 thru 9 or A thru 2.

DC fansModels JF0207, JF0307, JF0407 follow ed by B or S, follow ed by -1HX, -1LX, -1MX, -5HX, -5LM or -5MX; Model JF0210 follow ed by B, C or S, follow ed by -5LXXX; Model JF0410 follow ed by B, C or S, follow ed by -1XXX, -1HXXX, -1HXXX or -5MX; Model JF0413 follow ed by B, C, H, F or S, follow ed by 9, 1MXXX or -1HXXX; Model JF0512 follow ed by B, C or S, follow ed by -1LXXX; Model JF0512 follow ed by B, C or S, follow ed by -1MXXX; Model JF0512 follow ed by B, C or S, follow ed by -1HXXX; Model JF0512 follow ed by B, C or S, follow ed by -1HXXX; Model JF0512 follow ed by B, C or S, follow ed by -1HXXX; Model JF0512 follow ed by B, C or S, follow ed by -1HXXX; Model JF0512 follow ed by B, C, H, F or S, follow ed by -1HXXX, -1HXXX, -1HXXX, -2HXXX, -2HXXX or -2MXXX; Model JF0625 follow ed by B, C, H, F or S, follow ed by -1VXXX, -1EXXX, -1HXXX, -2HXXX, -2HXXX or -2MXXX; Model JF0625 follow ed by B, C, H, F or S, follow ed by -1VXXX, -1EXXX, -1HXXX, -1HXXX, -2HXXX, -2HXXX, -2HXXX; Model JF0625 follow ed by B, C, H, F or S, follow ed by -1VXXX, -1EXXX, -1LXXX, -1HXXX, -2HXXX, -2HXXX, -2HXXX, -2HXXX; Model JF0825 follow ed by B, C, H, F or S, follow ed by -1EXXX, -1HXXX, -1HXXX, -2HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0825 follow ed by B, C, H, F or S, follow ed by -1EXXX, -1HXXX, -1HXXX, -1HXXX, -2EXXX, -2LXXX, -2HXXX; or -2HXXX; Model JF0825 follow ed by B, C, H, F or S, follow ed by -1EXXX, -1HXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0825 follow ed by B, C, H, F or S, follow ed by 1EXXX, -1HXXX, -1HXXX, -1HXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0825 follow ed by B, C, H, F or S, follow ed by 1EXXX, -1LXXX, -1MXXX, -1HXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0825 follow ed by B, C, H, F or S, follow ed by 1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0825 follow ed by B, C, H, F or S, follow ed by -1EXXX, +1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0825 follow ed by B, C, H, F or S, follow ed by -1EXXX, +1LXXX

Model JFD615(X)2(Y)XXX, where (X) may be S, B or C and (Y) may be H, M, L, E or V.

Models JF0210(X)1H(Y), JF0210(X)1M(Y), JF0210(X)5H(Y), JF0210(X)5L(Y), JF0210(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models JF0310(X)1H(Y), JF0310(X)1L(Y), JF0310(X)1M(Y), JF0310(X)5H(Y), JF0310(X)5L(Y), JF0310(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models JF0A08(X)5H(Y), JF0A08(X)5L(Y), JF0A08(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or

blank.

Models JF0B10(X)1H(Y), JF0B10(X)1L(Y), JF0B10(X)1M(Y), JF0B10(X)5H(Y), JF0B10(X)5L(Y), JF0B10(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Model JF1751(X)4S(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models KF021055L, KF021055M, KF021055H, KF0210B5L, KF0210B5M, KF0210B5H, KF0210B5LD, KF0210B5LD, KF0210B5HD, KF0210B5HD, KF0210B5HD, KF0210B5HD, KF0210B5HD, KF0210B5HD, KF0210B5HD, KF0210B5HD, KF0210S5L, KF0210S5H, KF0210B1L, KF0210B1H, KF0210B1HD, KF0210B1HD, KF0210B1HD, KF0210B1HD, KF0210S1L, KF0210S1H, KF0210B1H, KF0210B1H, KF0210B1HD, KF0210B1HD, KF0210B1HD, KF0210S1H, KF0210S1H, KF0210B1H, KF0210B1H, KF0210B1H, KF0210B1H, KF0210B1HD, KF0210B1HD, KF0210B1HD, KF0210S1H, KF020051H, KF020055H, KF021051H, KF021051L, KF021051H, KF021051L, KF021051H, KF021051L, KF021051H, KF021051L, KF021051H, KF021051H, KF021051L, KF021051H, KF021051H, KF021051L, KF021051H, KF0210

Model KF0xyz, where x may be 420, 515 or 610, y may be B1, B2, B5, S1, S2 or S5 and z may be H, HC, HD, HS, L, LC, LD, LS, M, MC, MD or MS; Model KF123xyz, where x may be 2 or 8, y may be B1, B2, B5, S1, S2 or S4 and z may be H, HA, L, LA, M or MA; Model MF0xyz where x may be 410 or 510, y may be B1, B5, S1 or S5 and z may be H, HC, HD, HS, L, LC, LD, LS, M, MC, MD or MS.

Models KF0210S5L, KF0210S5M, KF0210S5H, KF0210B5L, KF0210B5M, KF0210B5H, KF0210C5L, KF0210C5M, KF0210C5H, KF0210C5H, KF0210S1L, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S5H, KF0310S5H, KF0310S5H, KF0310S5H, KF0310S5H, KF0310S5H, KF0310S5H, KF0310S5H, KF0310S1H, KF0310B5H, KF0310B5H, KF0310C5L, KF0310C5H, KF0310S1H, KF0310S1H, KF0310S1H, KF0310B1H, KF0310B1H, KF0310C1L, KF0310C1H, KF0310S1L, KF0410S1H, KF0410S1H, KF0410S1H, KF0410S1H, KF0410S1H, KF0410S1H, KF0410S1H, KF0410S1H, KF0410S5H, KF0410S5H, KF0410S5H, KF0410S5H, KF0410B5H, KF0410B5H, KF0410B5H, KF0410C5L, KF0410C5H, KF0410C5H, KF0410S1L, KF0510S1L, KF0510S1H, KF0510B1H, KF0510B1H, KF0510C1L, KF0510C1M, KF0410C5H, KF0510S1L, KF0510S1L, KF0510B1H, KF0510B1H, KF0510C1L, KF0510C1H, KF0510C1H. All models may have optional suffix "x4x5x6", where "x4", "x5" and "x6" may be A thru Z, 0 thru 9, "-" or blank.

Models KF0306S1M, KF0306S1H, KF0306C1H, KF0306C1S, KF0306S5M, KF0306S5H, KF0306C5M, KF0306C5H, KF0409S1L, KF0409S1M, KF0409S1H, KF0409S1H, KF0409S1H, KF0409S1H, KF0409S1H, KF0409S5H, KF0509S5H, KF0509SF, KF0509SF, KF0509S5H, KF0509S5H, KF0509SF, KF0509S

Models KF0510S5L, KF0510S5M, KF0510S5H, KF0510C5L, KF0510C5M, KF0510C5H, KF0510B5L, KF0510B5M, KF0510B5H, KF0515S5H, KF0515S5M, KF0515S5L, KF0515S5H, KF0515S5H, KF0515S5H, KF0515S5H, KF0509B1H, KF0509B1H, KF0509B1H, KF0509B1H, KF0509B1H, KF0509B1H, KF0509B1H, KF0509B1H, KF0509B1H, KF0515S1H, KF0515B1H, KF0515B1H, KF0515S1H, KF0515S1H, KF0515S1H, KF0515B1H, KF0525S1L, KF0625S1L, KF0625S1L, KF0625S1H, KF0625B1H, KF0625B1H, KF0625B1H, KF0625B1H, KF0625B1H, KF0625B1H, KF0625B1H, KF0625B1H, KF0510F5H, KF0510F5H, KF0510H5H, KF05

Models KF0407C1H, KF0407S1H, KF0407C1M, KF0407S1M, KF0407C5H, KF0407S5H, KF0407C5M, KF0407S5M, KF0207C1H, KF0C07C1H, KF0C07C1H, KF0C07C1M, KF0C07C3H, KF0C07C5H, KF0C07C5M, KF0C07C5M, KF0420B1L, KF0420S1L, KF0420B1M, KF0420B1H, KF0420B1H, KF0420S1H, KF0420B5L, KF0420B5L, KF0420B5L, KF0420B5H, KF0420S5H, KF0420S1H, KF0420B5H, KF0610B1L, KF0420S1H, KF0610B1H, KF0610B1H, KF0610B1H, KF0610S1L KF0420C1L, KF0420C1L, KF0420F1L, KF0420F1L, KF0420C1H, KF0420F1H, KF0420F1H, KF0420F1H, KF0420F1H, KF0420F1H, KF0420F5L, KF0420F5L, KF0420F5L, KF0420F5L, KF0420F5H, KF0610F1H, KF0610F1H, KF0610F1H, KF0610F1L, All models may have optional suffix "x4x5x6", where "x4", "x5" and "x6" may be A thru Z, 0 thru 9, "-" or blank.

Models JF0515(A1)1(B)XXX, JF0515(A1)2(B)XXX, JF0615(A)5(C)XXX, JF0615(A)1(D)XXX, JF0615(A)2(D)XXX, JF0620(A)1(D) XXX, JF0620(A)2(D)XXX, JF0625(A1)1(E)XXX, JF0525(A1)2(E)XXX, JF0625(A)4(F)XXX, JF0325(A1)1(D)XXX, JF0325(A1)2(E) XXX, JF0825(A1)4(G)XXX, JF0925(A1)1(D)XXX, JF0925(A1)2(D)XXX, JF0925(A1)4(I)XXX, JF1225(A1)1(D)XXX, JF1225(A1)2(D)XXX, JF1225(A1)4(F)XXX, JF1225(A1)1(D)XXX, JF1225(A1)2(D)XXX, JF1225(A1)4(F)XXX, JF0925(A1)1(D)XXX, JF0925(A1)2(D)XXX, JF0925(A1)4(I)XXX, JF1225(A1)1(D)XXX, JF1225(A1)2(D)XXX, JF1225(A1)4(F)XXX, JF0925(A1)1(D)XXX, JF0925(A1)2(D)XXX, JF0925(A1)4(I)XXX, JF1225(A1)1(D)XXX, JF1225(A1)2(D)XXX, JF1225(A1)4(F)XXX, JF1225(A1)2(D)XXX, JF1225(A1)2(D)XXX, JF1225(A1)4(F)XXX, JF1225(A1)2(D)XXX, JF1225(A1)2(D)XXX, JF1225(A1)4(F)XXX, JF1225(A1)2(D)XXX, JF1225(A1)4(F)XXX, JF1225(A1)2(D)XXX, JF1225(A1)4(F)XXX, JF1225(A1)

Models KF0420(A)2(B)(C), KF1225(A)1(D)(C), where (A) may be B, S, C, F or H, (B) may be L, M, H or S, (D) may be V, E, L, M or H and (C) may be XXX, where X may be 0 thru 9, A thru Z, "-" or blank.

 $\begin{array}{l} \mathsf{Models}\,\mathsf{LF0825(a)1(c)}(\mathfrak{f})(\mathfrak{g})(\mathfrak{h})(\mathfrak{i})(\mathfrak{f}),\,\mathsf{LF0925}(\mathfrak{b})1(\mathfrak{c})(\mathfrak{f})(\mathfrak{g})(\mathfrak{h})(\mathfrak{l})(\mathfrak{f}),\,\mathsf{LF1225}(\mathfrak{b})1(\mathfrak{c})(\mathfrak{f})(\mathfrak{g})(\mathfrak{h})(\mathfrak{i})(\mathfrak{f})) \\ \mathsf{G},\,(\mathfrak{b}) \mbox{ may be S or B, (c) may be S, H. M, L or E, (d) may be H. M, L or E, (e) may be H. M, L E or V, (f) may be S' or 0 thru 9 or A thru 3 or A thru 2, (g) may be 0 thru 4, (h) may be "-" or 0 thru 9 or A thru 2, (l) may be blank, "-" or 0 thru 9 or A thru 2, (j) may be blank, "-" or 0 thru 9 or A thru 2, (j) may be blank, "-" or 0 thru 9 or A thru 2, (j) may be blank, "-" or 0 thru 9 or A thru 2, (j) may be blank, "-" or 0 thru 9 or A thru 2, (j) may be blank, "-" or 0 thru 9 or A thru 3 or 0 thru 9 or 0 t$ 

 $\begin{array}{l} \mathsf{Models} \mathsf{KFOB10}(\mathsf{b})\mathsf{S}(\mathsf{r1})(xy)(z), \mathsf{KFOB10}(\mathsf{b})\mathsf{1}(\mathsf{r1})(xy)(z), \mathsf{KFO410}(\mathsf{b})\mathsf{2}(\mathsf{r6})(xy)(z), \mathsf{KFO510}(\mathsf{b})\mathsf{2}(\mathsf{r2})(xy)(z), \mathsf{KFO610}(\mathsf{b})\mathsf{S}(\mathsf{r3})(xy)(z), \mathsf{KFO615}(\mathsf{b})\mathsf{1}(\mathsf{r4})(xy)(z), \mathsf{KFO615}(\mathsf{b})\mathsf{2}(\mathsf{r4})(xy)(z), \mathsf{KFO520}(\mathsf{b})\mathsf{1}(\mathsf{r5})(xy)(z), \mathsf{KFO620}(\mathsf{b})\mathsf{2}(\mathsf{r3})(xy)(z), \mathsf{KFO615}(\mathsf{b})\mathsf{1}(\mathsf{r4})(xy)(z), \mathsf{KFO615}(\mathsf{b})\mathsf{2}(\mathsf{r4})(xy)(z), \mathsf{KFO520}(\mathsf{b})\mathsf{1}(\mathsf{r5})(xy)(z), \mathsf{KFO620}(\mathsf{b})\mathsf{2}(\mathsf{r5})(xy)(z), \mathsf{KFO715}(\mathsf{b})\mathsf{1}(\mathsf{r5})(xy)(z), \mathsf{KFO615}(\mathsf{b})\mathsf{2}(\mathsf{r4})(xy)(z), \mathsf{KFO715}(\mathsf{b})\mathsf{1}(\mathsf{r5})(xy)(z), \mathsf{KFO620}(\mathsf{b})\mathsf{1}(\mathsf{r7})(xy)(z), \mathsf{KFO715}(\mathsf{b})\mathsf{1}(\mathsf{r5})(xy)(z), \mathsf{KFO620}(\mathsf{b})\mathsf{1}(\mathsf{r7})(xy)(z), \mathsf{KFO715}(\mathsf{b})\mathsf{1}(\mathsf{r5})(xy)(z), \mathsf{KFO620}(\mathsf{b})\mathsf{1}(\mathsf{r6})(xy)(z), \mathsf{KFO615}(\mathsf{b})\mathsf{1}(\mathsf{r6})(xy)(z), \mathsf{KFO615}(\mathsf{b})(xy)(z), \mathsf$ 

Models IF1238(b)1(w)(x)(y)(z), JF1238(b)2(w)(x)(y)(z), JF1238(b)4(w)(x)(y)(z), JF1425(b)1(v)(x)(y)(z), JF1425(b)2(v)(x)(y)(z), JF1425(b)2(v)(x)(x)(y)(z), JF1425(b)2(v)(x)(x)(y)(z), JF1425(b)2(v)(x)(x)(y)(x)(y)(z), JF1425(b)2(v)(x)(y)(z), JF1425(b)2(v)(x)(y)(

Models JB055101(u)(w)(x)(y)(z), JB055105(v)(w)(x)(y)(z) series, where (u) may be H, M or L, (v) may be M or L, (w) may be B, S, C, H or F, (x), (y) and (z) may be A through Z, 0 through 9, black, or "-".



Marking: Company hame, "E156480", trademark model designation. Last Updated on 2010-01-26

Ouestions?

Notice of Disclaimer

Page Top

Copyright 72010 Underwriters Laboratories Inc. D

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL cermits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2010 Underwriters Laboratories Inc."

An independent organization working for a safer world with integrity, precision and knowledge





### GPWV8.E156480 Fans, Electric Certified for Canada - Component

Page Bottom

#### Fans, Electric Certified for Canada - Component

See General Information for Fans, Electric Certified for Canada - Component

### KAIMEL ELECTRONIC CORP. 13TH

E156480

81 HSIN-TAI-WURD, SEC 1 HSICHIH, TAIPEI HSIEN 221 TAIWAN

AC fans, Models MA0825H2Bzz, MA0825H2Szz, MA0825M2Bzz, MA0825M2Szz, MA0838H2Bzz, MA083H2Szz, MA0838H2Bzz, MA0838M2Szz, MA0925H2Bzz, MA0925H2Szz, MA0925M2Bzz, MA0925M2Szz, MA0938H2Bzz, MA0938H2Szz, MA0938M2Bzz, MA0938M2Szz, KA0938H2Bzz, KA0938H2Szz, KA0938M2Bzz, KA0938M2Szz, MA1225H2Bzz, MA1225H2Szz, MA1225H2Bzz, MA1225M2Szz, KA1338H2Bzz, KA1338H2Szz, KA1338M2Bzz, KA1338M2Szz, KA1338L2Bzz, KA1338L2Szz, MA1338H2Bzz, MA1338H2Szz, MA1338M2Bzz, MA1338M2Szz, MA2260H2Bzz, MA0825H1Bzz, MA0825H1Szz, MA0825M1Bzz, MA0825M1Szz, MA0838H1Bzz, MA0838H1Szz, MA0838M1Bzz, MA0838M1Szz, MA0925H1Bzz, MA0925H1Szz, MA0925M1Bzz, MA0925M1Bzz, MA0938H1Bzz, MA0938H1Szz, MA0938M1Bzz, MA0938M1Szz, KA0938H1Bzz, KA0938H1Szz, KA0938M1Bzz, KA0938M1Bzz, MA1225H1Bzz, MA1225H1Szz, MA1225M1Bzz, MA1225M1Szz, KA1338H1Bzz, KA1338H1Sz, KA1338M1Bzz, KA1338M1Szz, KA1338L1Bzz, KA1338L1Szz, MA1338H1Bzz, MA1338H1Szz, MA1338M1Bzz, MA1338M1Szz, MA2260H1Bzz.

Models JA1751H1, JA1751H2, JA1238H1, JA1238H2, JA1238-1H1, JA1238-1H2, JA1225H1, JA1225H2, JA0925H1, JA0925H2, JA0838H1, JA0838H2, JA0825H1, JA0825H2.

Model KAX (A) (B) X1 and/or X2, where X may be 0825, 0838, 0925, 1225, 1238 or 1751, (A) may be H1, H2, M1, M2, L1 or L2, (B) may be B or S and X1, X2 may be 0 thru 9, A thru Z, blank or "-"; Model MAX (A) (B) X1 and/or X2, where X may be 1238, 1538, 1738, 1751, 1755 or 2589, (A) may be H1, H2, M1 or M2, (B) may be B, S and X, , X, may be 0 thru 9, A thru Z or 1.1

Models JA1238(a)(c)(b)(x)(y), JA1238HD(b)(x)(y), KA1238(a)(c)(b)(x)(y), KA1238HD(b)(x)(y) series, where (a) may be H, M or L, (c) may be 1 or 2, (b) may be B or S, (x) and (y) may be blank, "-", 0 thru 9 or A thru Z.

Models JA1225H1(b)(x)(y), JA1225L1(b)(x)(y), JA0925H1(b)(x)(y), JA0838H1(b)(x)(y), JA0825H1(b)(x)(y), JA1225H2(b)(x) (y), JA1225L2(b)(x)(y), JA0925H2(b)(x)(y), JA0838H2(b)(x)(y), JA0825H2(b)(x)(y) series, where (b) may be B or S, (x) and (y) may be blank, "-", 0 thru 9 or A thru Z.

Models JA1751H1(b)(x)(y), JA1751H2(b)(x)(y) series, where (b) may be S or B, (x) and (y) may be blank, "-", 0 thru 9 or A thru Z.

DC fansModels JF0207, JF0307, JF0407 follow ed by B or S, follow ed by -1HX, -1LX, -1MX, -5HX, -5LM or -5MX; Model JF0210 followed by B, C or S, followed by -5LXXX; Model JF0410 followed by B, C or S, followed by -1XXX, -1MXXX, -1HXXX or 5MXXX; Model JF0413 followed by B, C or S, followed by -1MXXX or -1HXXX; Model JF0512 followed by B, C or S, followed by -1LXXX or -1MXXX; Model JF0615 followed by B, C or S, followed by -1HXXX, -1LXXX or -1MXXX, -1EXXX, -1VXXX; Model JFD620 follow ed by B, C or S, followed by 1VXXX, -1EXXX, 1LXXX, -1MXXX, -1HXXX, -2VXXX, -2EXXX, -2LXXX, -2HXXX or 2MXXX; Model JF0625 followed by B, C or S, followed by -1VXXX, -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2VXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF0825 followed by B, C, H, F or S, followed by -1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; where "X" may be 0 thru 9, A thru Z, "-" or blank; Model JF0925 followed by B, C, H, F or S, followed by 1EXXX, -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JF1225 followed by B, C, H, F or S, followed by -1EXXX -1LXXX, -1MXXX, -1HXXX, -2EXXX, -2LXXX, -2MXXX or -2HXXX; Model JH0410S1.

Model JF0615(X)2(Y)XXX, where (X) may be S, B or C and (Y) may be H, M, L, E or V.

Models JF0210(X)1H(Y), JF0210(X)1M(Y), JF0210(X)5H(Y), JF0210(X)5L(Y), JF0210(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models JF0310(X)1H(Y), JF0310(X)1L(Y), JF0310(X)1M(Y), JF0310(X)5H(Y), JF0310(X)5L(Y), JF0310(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models JF0A08(X)5H(Y), JF0A08(X)5L(Y), JF0A08(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or

blank,

Models JF0B10(X)1H(Y), JF0B10(X)1L(Y), JF0B10(X)1M(Y), JF0B10(X)5H(Y), JF0B10(X)5L(Y), JF0B10(X)5M(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Model JF1751(X)4S(Y), where (X) may be B, C or S and (Y) may be 0 thru 9, A thru Z or blank.

Models KF0210S5L, KF0210S5M, KF0210S5H, KF0210B5L, KF0210B5M, KF0210B5H, KF0210B5LD, KF0210B5D, KF0210B5HD, KF0210B5HD, KF0210B5HD, KF0310S5L, KF0310S5L, KF0310S5L, KF0310B5L, KF0310B5L, KF0310B5H, KF0310B5LD, KF0310B5LD, KF0310B1D, KF0310B1D, KF0310B1LD, KF0310S1L, KF0310S1M, KF0310B1L, KF0310B1H, KF0310B1H, KF0310B1LD, KF0310B1HD, KF0310B1HD, KF0310S1L, KF0306S1M, KF0310B1H, KF0410B1H, KF0410B1LD, KF0410B1HD, KF0410B1HD, KF0306S1M, KF0306S1M, KF0306B1H, KF0406S1H, KF0406B1H, KF0409B1L, KF0409B1H, KF0409B1H, KF0400B1H, KF0409B1LD, KF0409B1HD, KF0409B1L, KF0409S1H, KF0306B1M, KF0409B1H, KF0409B1LD, KF0409B1HD, KF0409B1HD, KF0510S1L, KF0510S1H, KF0510B1H, KF0409B1H, KF0409B1H, KF0409B1H, KF0409B1H, KF0409B1H, KF0409B1H, KF0409B1H, KF0409B1HD, KF0510B1HD, KF0510S1L, KF0510S1H, KF0510B1H, KF0510B1HD, KF0510B1H, KF0510B1HD, KF0510B1H, KF0409B51D, KF0510B1H, KF0510B1H, KF0409B51D, KF0510B1H, KF0510B1H, KF0409B51D, KF0409B51D, KF0510B1HD, KF0510B1H, KF0409B51D, KF0209551, KF0409B51D, KF0209551, KF0209551, KF0209551, KF0209551, KF0209551, KF0209551, KF0210F1H, KF0310H5L, KF0210F5M, KF0310F5M, KF0310F5H, KF0310H1H, KF0310H1H, KF0310H1H, KF0310H1H, KF0310F1H, KF0510F1H, KF051

Model KF0xyz, where x may be 420, 515 or 610, y may be B1, B2, B5, S1, S2 or S5 and z may be H, HC, HD, HS, L, LC, LD, LS, M, MC, MD or MS; Model KF123xyz, where x may be 2 or 8, y may be B1, B2, B5, S1, S2 or S4 and z may be H, HA, L, LA, M or MA; Model MF0xyz where x may be 410 or 510, y may be B1, B5, S1 or S5 and z may be H, HC, HD, HS, L, LC, LD, LS, M, MC, MD or MS.

Models KF0210S5L, KF0210S5M, KF0210S5H, KF0210B5L, KF0210B5M, KF0210B5H, KF0210C5L, KF0210C5L, KF0210C5H, KF0210C5H, KF0210C5H, KF0210S1L, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S1H, KF0210S1H, KF0210C1H, KF0210S5L, KF0310S5M, KF0310S5H, KF0310S5H, KF0310B5H, KF0310B5H, KF0310S5L, KF0310C5H, KF0310S1L, KF0310S1H, KF0310S1H, KF0310B1H, KF0310B1H, KF0310C1L, KF0310C1H, KF0310C1H, KF0410S1L, KF0410S1H, KF0410S1H, KF0410B1H, KF0410B1H, KF0410C1L, KF0410C1M, KF0310C1H, KF0410S5L, KF0410S5H, KF0410S5H, KF0410B5H, KF0410B5H, KF0410B1H, KF0410C1L, KF0410C1M, KF0410C1H, KF0410C5L, KF0410C5H, KF0410C5H, KF0410S5L, KF0410S5H, KF0510S1L, KF0510S1L, KF0510S1H, KF0510B1H, KF0510B1H, KF0510C1L, KF0510C1H, KF0510C1H, KF0510S1L, KF0510S1H, KF0510B1H, KF0510B1H, KF0510C1L, KF0510C1H, KF0510C1H. All models may have optional suffix "x4x5x6", where "x4", "x5" and "x6" may be A thru Z, 0 thru 9, "-" or blank.

Models KF051055L, KF051055M, KF051055H, KF0510C5L, KF0510C5M, KF0510C5H, KF0510B5L, KF0510B5M, KF0510B5H, KF051555H, KF051555M, KF051555L, KF0515C5L, KF0515C5M, KF0515C5H, KF0515B5L, KF0515B5M, KF0515B5H, KF0509B1H, KF0509B1L, KF0509B1M, KF050951H, KF0509S1L, KF0509C1H, KF0509C1L, KF0509C1L, KF0509C1H, KF051551L, KF051551M, KF051551H, KF0515C1L, KF0515C1M, KF0515C1H, KF0515B1L, KF0515B1M, KF0515B1H, KF062551L, KF062551M, KF062551H, KF0625C1L, KF0625C1M, KF0625C1H, KF0625B1L, KF0625B1M, KF0625B1H, KF0510F5L, KF0510F5M, KF0510F5H, KF0510H5L, KF0510H5M, KF0510H5H. All models may have optional suffix "x4x5x6", where "x4", "x5" and "x6" may be A thru Z, 0 thru 9, "-" or blank.

Models KF0407C1H, KF0407S1H, KF0407C1M, KF0407S1M, KF0407C5H, KF0407S5H, KF0407C5M, KF0407S5M, KF0407S5M, KF0C07C1H, KF0C07C1H, KF0C07C1H, KF0C07C1H, KF0C07C5M, KF0C07C5M, KF0C07S5M, KF0420B1L, KF0420S1L, KF0420B1M, KF0420S1H, KF0420B1H, KF0420S1H, KF0420S5H, KF0420S5H, KF0420S5M, KF0420S5M, KF0420S5H, KF0420S5H, KF0420S5H, KF0610S1H, KF0610C1H, KF0610B1H, KF0610C1M, KF0610B1M, KF0610S1M, KF0610C1L, KF0610B1L, KF0610S1L, KF0420C1L, KF0420F1L, KF0420F1H, KF0420C1H, KF0420F1H, KF0420C1H, KF0420F1L, KF0420F1H, KF0420F1H, KF0420F1H, KF0420C5H, KF0420F5H, KF0420C5H, KF0420F5H, KF0420C5H, KF0420F5H, KF0420F5H, KF0420F5H, KF0610F1H, KF0610F1H, KF0610F1H, KF0610F1L. All models may have optional suffix "x4x5x6", where "x4", "x5" and "x6" may be A thru Z, 0 thru 9, "-" or blank.

Models JF0515(A1)1(B)XXX, JF0515(A1)2(B)XXX, JF0615(A)5(C)XXX, JF0615(A)1(D)XXX, JF0615(A)2(D)XXX, JF0620(A)1(D) XXX, JF0620(A)2(D)XXX, JF0625(A1)1(E)XXX, JF0625(A1)2(E)XXX, JF0625(A1)4(F)XXX, JF0825(A1)1(D)XXX, JF0825(A1)2(E) XXX, JF0825(A1)4(G)XXX, JF0925(A1)1(D)XXX, JF0925(A1)2(D)XXX, JF0925(A1)4(I)XXX, JF1225(A1)1(D)XXX, JF1225(A1)2 (D)XXX, JF1225(A1)4(F)XXX, where (A) may be B, C or S, (B) may be H, M, L or E, (C) may be H, M, L, E or V, (D) may be U or S, (E) may be T, U or S, (F) may be U, S, H, M, L or E, (G) may be U, S, H, M or L, (H) may be S, H, M or L, (I) may be S, H, M, L or E and "X" may be 0 thru 9, A thru Z, blank or "-", (A1) may be B, C, S, H or F.

Models KF0420(A)2(B)(C), KF1225(A)1(D)(C), where (A) may be B, S, C, F or H, (B) may be L, M, H or S, (D) may be V, E, L, M or H and (C) may be XXX, where X may be 0 thru 9, A thru Z, "-\* or blank.

Models LF0825(a)1(c)(f)(g)(h)(i)(j), LF0925(b)1(d)(f)(g)(h)(i)(j), LF1225(b)1(e)(f)(g)(h)(i)(j) series, where (a) may be S, B or C, (b) may be S or B, (c) may be S, H. M, L or E, (d) may be H. M, L or E, (e) may be H. M, L, E or V, (f) may be "-" or 0 thru 9 or A thru Z, (g) may be 0 thru 4, (h) may be "-" or 0 thru 9 or A thru Z, (i) may be blank, "-" or 0 thru 9 or A thru Z, (j) may be blank, "-" or 0 thru 9 or A thru Z, (j) may be blank, "-" or 0 thru 9 or A thru Z, (j) may be blank, "-" or 0 thru 9 or A thru Z.

Models KF0B10(b)5(r1)(xy)(z), KF0B10(b)1(r1)(xy)(z), KF0410(b)2(r6)(xy)(z), KF0510(b)2(r2)(xy)(z), KF0610(b)5(r3)(xy)(z), KF0615(b)1(r4)(xy)(z), KF0615(b)2(r4)(xy)(z), KF0620(b)1(r5)(xy)(z), KF0620(b)2(r5)(xy)(z), KF0615(b)1(r2)(xy)(z), KF0620(b)2(r7)(xy)(z), KF0620(b)2(r2)(xy)(z), KF0715(b)1(r2)(xy)(z), KF0820(b)1(r7)(xy)(z), KF0820(b)2(r7)(xy)(z), KF1225(b)2(r2)(xy)(z), JF0815(b)1(r8)(xy)(z), JF0815(b)2(r8)(xy)(z), JF1238(b)1(r1)(xy)(z), JF1238(b)2(r1)(xy)(z), JF1238(b)4(r6)(xy)(z) series, where (b) may be S, B, C, H or F, (r1) may be S, H, M, L or E, (r2) may be H, M or L, (r3) may be M, L, E or V, (r4) may be U, S, H, M or L, (r7) may be U, S, H, M L or E, (r8) may be U, S, H, M or L, (r7) may be U, S, H, M L or E, (r8) may be U, S, H, M or L, (xy) is apharumeric combination of two digits and/or alphabets, each may be blank, "-", A thru Z or 0 thru 9.

Models JF1238(b)1(w)(x)(y)(z), JF1238(b)2(w)(x)(y)(z), JF1238(b)4(w)(x)(y)(z), JF1425(b)1(v)(x)(y)(z), JF1425(b)2(v)(x)(y)(z), JF1425(b)2(v)(x)(x)(y)(x)(x)(y)(x)

Models JB055101(u)(w)(x)(y)(z), JB055105(v)(w)(x)(y)(z) series, where (u) may be H, M or L, (v) may be M or L, (w) may be B, S, C, H or F, (x), (y) and (z) may be A through Z, 0 through 9, blank, or "-".

Marking: Company name, model designation and Recognized Component Mark for Canada, **C 7742** Last Updated on 2010-01-26

**Ouestions?** 

Notice of Disclaimer

Page Top

Copyright 72010 Underwriters Laboratories Inc.®

The appearance of a company's name or product in this distabase does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

LL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2010 Underwriters Laboratories Inc."

An independent organization working for a safer world with integrity, precision and knowledge.



Zertifikat	Certificate	E.
<b>Zertifikat Nr. <i>Certificate No.</i></b> R 50029788	Blatt Page 0007	TUV
hr Zeichen <i>Client Reference</i> KL230506/DTI	-	usstellungsdatum Date of Issue (day/mo/yr) 28.06.2006
Genehmigungsinhaber License H Kaimei Electronic Co 13th Fl., No. 81 Sec. 1, Hsin-Tai-Wu Hsichih, Taipei Hsie Taiwan	rp. Kaimei Elect 10th Industr Rd. 2nd Road, Do	ronic (HK), Ltd.
Prüfzeichen Test Mark	Geprüft nach Tested acc. to EN 60950-1:2001+A11	
Zertifiziertes Produkt (Geräte Certified Product (Produc	dentifikation) t Identification)	Lizenzentgelte - Einheit License Fee - Unit
Ventilator (DC Fan)		
X1 steht für (stands fo Y steht für (stands for Änderung für Bezeichnum (Change for Type Design X1 steht für (stands fo X2 steht für (stands fo X5 steht für (stands fo X6 steht für (stands for Y steht für (stands for	<pre>) : 0-9, A-Z order (or) freibleibend (blank) g : JF0515X11X2YYY JF0625X11X5YYY JF0625X12X5YYY JF0625X12X5YYY yF0625X14X6YYY or) : S, B, C, H oder (or) F or) : H, M, L oder (or) E or) : T, U oder (or) S or) : U, S, H, M, L oder (or) f or) : 0-9, A-Z order (or) freibleibend (blank)</pre>	1 1 1 1 1
ANLAGE (Appendix):		
	rungen, die Herstellung wird überwacht. and Certification Regulation. The product	Zertifizierungsstelle
	GmbH, Am Grauen Stein, D-51105 Köln	-11.1.1
	/221)8 06 - 39 35 e-mail: Althoff@de.tuv.com	<i><i><i>i i i i i i i i</i></i></i>

KAIMEI ELECTRONIC CORP.

### **TÜV Rheinland Group**



Report No. 10007289 002 License No. R 50029788

Appendix No.

1.1

#### ATTACHMENT-1

Model Nos.	Rating	Model Nos.	Rating
JF0815(X1)1U(X4)	12Vdc, 0.34A	JF0815(X1)2U(X4)	24Vdc, 0.17A
JF0815(X1)1S(X4)	12Vdc, 0.22A	JF0815(X1)2S(X4)	24Vdc, 0.14A
JF0815(X1)1H(X4)	12Vdc, 0.17A	JF0815(X1)2H(X4)	24Vdc, 0 10A
JF0815(X1)1M(X4)	12Vdc, 0.11A	JF0815(X1)2M(X4)	24Vdc, 0.07A
JF0815(X1)1L(X4)	12Vdc, 0.06A	JF0815(X1)2L(X4)	24Vdc, 0.06A
JF0515(X1)1H(X4)	12Vdc, 0.24A	JF0515(X1)2H(X4)	24Vdc, 0 13A
JF0515(X1)1M(X4)	12Vdc, 0.22A	JF0515(X1)2M(X4)	24Vdc, 0.12A
JF0515(X1)1L(X4)	12Vdc, 0.16A	JF0515(X1)2L(X4)	24Vdc, 0.11A
JF0515(X1)1E(X4)	12Vdc, 0.12A	JF0515(X1)2E(X4)	24Vdc, 0.08A
JF0625(X1)1T(X4)	12Vdc, 0.38A	JF0625(X1)4U(X4)	48Vdc, 0.11A
JF0625(X1)1U(X4)	12Vdc, 0.30A	JF0625(X1)4S(X4)	48Vdc, 0.09A
JF0625(X1)1S(X4)	12Vdc, 0.22A	JF0625(X1)4H(X4)	48Vdc, 0.08A
JF0625(X1)2T(X4)	24Vdc, 0.21A	JF0625(X1)4M(X4)	48Vdc, 0.07A
JF0625(X1)2U(X4)	24Vdc, 0.16A	JF0625(X1)4L(X4)	48Vdc. 0.06A
JF0625(X1)2S(X4)	24Vdc, 0.14A	JF0625(X1)4E(X4)	48Vdc, 0.05A
JF0825(X1)1U(X4)	12Vdc, 0.37A	JF0825(X1)4U(X4)	48Vdc, 0.12A
JF0825(X1)1S(X4)	12Vdc, 0.26A	JF0825(X1)4S(X4)	48Vdc, 0.10A
JF0825(X1)2T(X4)	24Vdc, 0.27A	JF0825(X1)4H(X4)	48Vdc, 0.08A
JF0825(X1)2U(X4)	24Vdc, 0.21A	JF0825(X1)4M(X4)	48Vdc, 0.06A
JF0825(X1)2S(X4)	24Vdc, 0.17A	JF0825(X1)4L(X4)	48Vdc, 0.05A
JF0925(X1)1U(X4)	12Vdc, 0.42A	JF0925(X1)4S(X4)	48Vdc, 0.13A
JF0925(X1)1S(X4)	12Vdc, 0.32A	JF0925(X1)4H(X4)	48Vdc, 0 09A
		JF0925(X1)4M(X4)	48Vdc, 0.08A
JF0925(X1)2U(X4)	24Vdc, 0.24A	JF0925(X1)4L(X4)	48Vdc, 0.06A
JF0925(X1)2S(X4)	24Vdc, 0.18A	JF0925(X1)4E(X4)	48Vdc, 0.05A
JF1225(X1)1U(X4)	12Vdc, 0.50A	JF1225(X1)4U(X4)	48Vdc, 0.14A
JF1225(X1)1S(X4)	12Vdc, 0.37A	JF1225(X1)4S(X4)	48Vdc, 0.12A
	bi d	JF1225(X1)4H(X4)	48Vdc, 0.10A
JF1225(X1)2U(X4)	24Vdc, 0.28A	JF1225(X1)4M(X4)	48Vdc, 0.08A
JF1225(X1)2S(X4)	24Vdc, 0.21A	JF1225(X1)4L(X4)	48Vdc, 0.07A
		JF1225(X1)4E(X4)	48Vdc, 0.06A

(X1) may be S, B, C, H or F;(X4) may be three digits, each may be blank, "-", 0-9 or A-Z, for marketing purpose.

<b>TÜV Rheinland Group</b>	36	Kaimei Electronic Co	DAVID TECHNOLOGY INC.
22.06.06 the		14-June-06	(name of authorized person)
XS	-	STATE WIN	6312 200 114
Date Name	Signature	Date Name	Stamp & Signature of licenseholder

page 4 of 5



EN 61000-3-2:2006, EN 61000-3-3:1995/A1:2001/A2:2005 and EN 55024:1998/A1:2001/A2:2003 (IEC 61000-4-2:1995/A2:2000, IEC 61000-4-3:2006, IEC 61000-4-4:2004,IEC 61000-4-5:2005, IEC 61000-4-6:2006, IEC 61000-4-8:1993/A1:2000, IEC 61000-4-11:2004 ). THE TEST WAS CARRIED OUT ON May 28, 2008 AT SPORTON INTERNATIONAL INC. LAB.

Cation Throng Tunice 200

Castries Huang Supervisor

SPORTON INTERNATIONAL INC. 6F, No.106, Sec.1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

KAIMEI ELECTRONIC CORP.

#### Certificate No: EC2D2008-03

### ACCORDING TO European Standard EN 55022:2006 Class B, EN 61000-3-2:2006, EN 61000-3-3:1995/A1:2001/A2:2005 and EN 55024:1998/A1:2001/A2:2003 (IEC 61000-4-2:1995/A2:2000, IEC 61000-4-3:2006, IEC 61000-4-4:2004,IEC 61000-4-5:2005, IEC 61000-4-6:2006, IEC 61000-4-8:1993/A1:2000, IEC 61000-4-11:2004 ).

More detail information of Model No .:

X1 means for Width x Width = 02, 03, 04, 05, 06, 07, 08, 09, 0A,  $\cdot$ 0B, 0C, 12, 15 Where 02=25x25, 03=30x30, 04=40x40, 05=50x50, 06=60x60, 07=70x70, 08=80x80, 09=92x92, 0A=20x20, 0B=35x35, 0C=45X45, 12=120x120, 17= $\phi$  172 or 172x150 mm X2 means for thickness = 06, 07, 09, 10, 12, 15, 20, 25 or 25.4, 32, 38, 51 Where 06= 6, 07=7, 09=9 or 10, 10= 10, 12=12, 15=15, 20=20, 25= 25 or 25.4, 32=32, 38=38, 51=51 mm

Where the cross list for X1&X2 as the following:

0A10, 0206, 0207, 0210, 0306, 0307, 0310, 0B06, 0B07, 0B10, 0406, 0407, 0409, 0410, 0412, 0415, 0420, 0425, 0C07, 0C10, 0509, 0510, 0512, 0515, 0520, 0525, 0610, 0615, 0620, 0625, 0638, 0710, 0715, 0720, 0725, 0815, 0820, 0825, 0832, 0838, 0925, 0932, 0938, 1225, 1232, 1238, 1738, 1751

X3 means for bearing type = S, B, H, C

Where B = Dual Ball, S = Sleeve, C = Ball + Sleeve, H = HTLS, F = Free Wheel X4 means for rated voltage =1 (12V), 2 (24V), 3 (32V), 4(48V), 5(5V), A(3V), B (25.5V), C(42V), D(18V), E(15V)

X5 means for rotation speed =T, U, S, H, M, L, E, V or 7, 6, 5, 4, 3, 2, 1, 0.

Where T or 7 means speed higher than U or 6 speed code,

U or 6 means speed higher than S or 5 speed code,

S or 5 means speed higher than H or 4 speed code.

H or 4 means Standard-high speed code,

M or 3 means Middle speed code,,

L or 2 means Low speed code,

E or 1 means speed lower than L speed code,

V or 0 means speed lower than E speed code.

X6, X7, X8 means the internal code to distinguish the wiring, frame and blade type or the dimension of the screw hole and or the color of the above material and also for special printing characters on the label requested by the client.

astine strong times and

Castries Huang Supervisor