


- Wide temperature range series with 7mm height.
- Corresponding product to RoHS




### ● SPECIFICATION

Item	Characteristic						
Operation Temperature Range	-55 ~ +105°C						
Rated Working Voltage	6.3 ~ 50VDC						
Capacitance Tolerance (120Hz 20°C)	±20%(M)						
Leakage Current (20°C)	I ≤ 0.01CV or 3 (μA)				I : Leakage Current (μA)	C : Rated Capacitance (μF)	V : Working Voltage (V)
	*Whichever is greater after 2 minutes						
Surge Voltage (20°C)	W.V.	6.3	10	16	25	35	50
	S.V.	8	13	20	32	44	63
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	6.3	10	16	25	35	50
	tan δ	0.24	0.21	0.18	0.15	0.13	0.12
Low Temperature Stability	Impedance ratio at 120Hz						
	Rated Voltage (V)	6.3	10	16	25	35	50
	-25°C / +20°C	3	2	2	2	2	2
	-40°C / +20°C	6	5	4	3	3	3
Load Life	After 1000 hours application of W.V. and +105°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage ≤ rate working voltage)						
	Capacitance Change	≤ ±25% of initial value					
	Dissipation Factor	≤ 200% of initial specified value					
	Leakage current	≤ initial specified value					
Shelf Life	At +105°C no voltage application after 1000 hours the capacitor shall meet the limits for load life characteristics. (with voltage treatment)						

### ● DIMENSIONS (mm)

φD	4	5	6.3	8
F	1.5	2.0	2.5	3.5
d	0.45	0.45	0.45	0.50
α	1.0	1.0	1.0	1.0

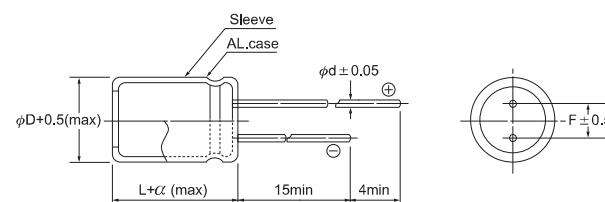

### ● CASE SIZE & MAX RIPPLE CURRENT

μF	V(DC) Item	6.3		10		16		25		35		50	
		DxL	R.C.	DxL	R.C.								
1.0												→	4x7
2.2												→	4x7
3.3												→	4x7
4.7										→	4x7	24	5x7
10				→	4x7	29	5x7	33	5x7	36	6.3x7	45	
22	4x7	34	5x7	41	5x7	46	6.3x7	51	6.3x7	60	8x7	75	
33	5x7	46	5x7	50	6.3x7	65	6.3x7	70	8x7	85			
47	5x7	55	6.3x7	70	6.3x7	75	8x7	95					
100	6.3x7	90	6.3x7	100	6.3x7	110							
220	8x7	160	8x7	170									

All blank voltage on sleeve marking is the same voltage as " → " point to.